



**Art.-Nr: AGD408WL-E**  
**Exit sign Single Battery**  
**Ceiling, Wireless Professional (WL), 8 h, 50m, IP40, Zinc die-cast, Stainless steel**

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information

[www.rp-group.com/en/item/AGD408WL-E](http://www.rp-group.com/en/item/AGD408WL-E)



## TECHNICAL DATA


|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | Exit sign                           |
| Mounting               | Ceiling                             |
| Recognition distance   | 50m                                 |
| Pictograph             | acc. to Specification               |
| Illuminant             | LED                                 |
| Housing material       | Zinc die-cast                       |
| Housing color          | Stainless steel                     |
| Protection type (IP)   | IP40                                |
| Impact resistance (IK) | ≥ 3                                 |
| Certification          | WEEE, CE                            |
| Insulation class       | 2                                   |
| Supply                 | Single Battery                      |
| Monitoring             | Wireless Professional (WL)          |
| Bridging time          | 8 h                                 |
| Battery                | 6,4 V 1,2 Ah/                       |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltageAC        | 230 V                               |



|                          |                     |
|--------------------------|---------------------|
| Input frequency          | 50 Hz               |
| Power max.               | 7 W                 |
| Power DS                 | 5,6 W               |
| Power BS                 | 0,8 W               |
| Ambient temperature DS   | -5 °C - 40 °C       |
| Ambient temperature BS   | -5 °C - 40 °C       |
| Depth                    | 80 mm               |
| Width                    | 517 mm              |
| Height                   | 330 mm              |
| Weight                   | 2.82                |
| Weight incl. packaging   | 3.47                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | Yes                 |
| Battery connection       | Connector           |
| Dimming function         | Yes                 |
| Customs tariff number    | 94056180            |
| EAN                      | 4260682155276       |



## TECHNICAL DRAWING

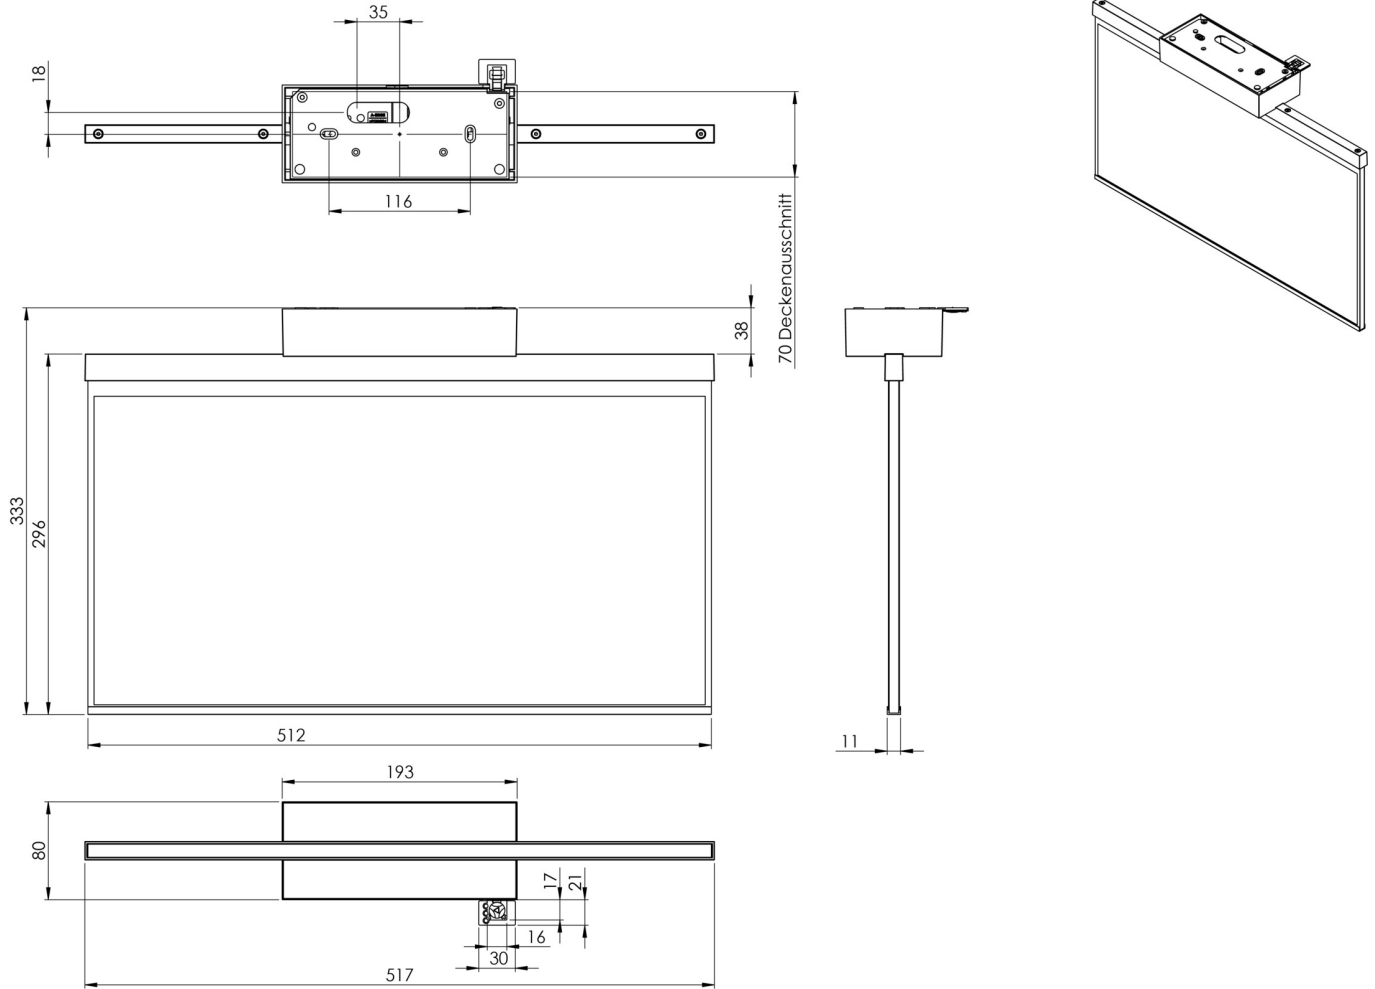

As of: 23.08.2024 - Subject to technical changes and errors.