



## Art.-Nr: AGR009ML-AZ Exit sign Centralised power supply systems Recessed wall mounting, Central power supply (ML), CPS, 50m, IP40, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the wall and for identifying emergency and escape routes.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Control and monitoring via central power supply system. The requested pictogram (arrow to the right, left, up or down) is supplied as standard.





More information www.rp-group.com/en/item/AGR009ML-AZ



## **TECHNICAL DATA**

| Luminaire type         | Exit sign                        |
|------------------------|----------------------------------|
| Mounting               | Recessed wall mounting           |
| Recognition distance   | 50m                              |
| Pictograph             | acc. to Specification            |
| Illuminant             | LED                              |
| Housing material       | Zinc die-cast                    |
| Housing color          | Anthracite                       |
| Protection type (IP)   | IP40                             |
| Impact resistance (IK) | ≥ 3                              |
| Certification          | WEEE, CE                         |
| Insulation class       | 2                                |
| Supply                 | Centralised power supply systems |
| Monitoring             | Central power supply (ML)        |
| Bridging time          | CPS                              |
| Battery                | /                                |
| Operating mode         | single luminaire switching       |
| Input voltageAC        | 230 V                            |
| Input frequency        | 50 / 60 Hz                       |
| Input voltage DC       | 216 V                            |






| Power max.               | 6,1 W         |
|--------------------------|---------------|
| Power DS                 | 6,1 W         |
| Power BS                 | 1,1 W         |
| Ambient temperature DS   | -5 °C - 40 °C |
| Ambient temperature BS   | -5 °C - 40 °C |
| Depth                    | 73 mm         |
| Width                    | 517 mm        |
| Height                   | 296 mm        |
| Installation length      | 176 mm        |
| Installation width       | 68 mm         |
| Installation height      | 40 mm         |
| Weight                   | 2.52          |
| Weight incl. packaging   | 3.17          |
| Connection cross-section | 2.5 mm²       |
| Switching input          | Yes           |
| Emergency light blocking | No            |
| Battery connection       | No            |
| Dimming function         | Yes           |
| Customs tariff number    | 94056180      |
| EAN                      | 4260659565800 |





## TECHNICAL DRAWING

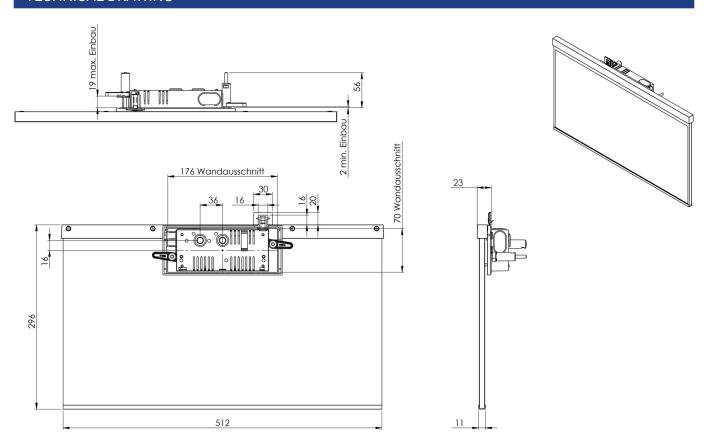

## RELATED PRODUCTS

| ArtNo.     | Image       | Monitoring                | Supply               | Color     | Investment | Automatic log | Maintenance<br>level | Remote main-<br>tenance | max. luminai-<br>res | Single luminai-<br>re monitoring |
|------------|-------------|---------------------------|----------------------|-----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| AGR009ML   | <b>13</b> > | Central power supply (ML) | Central power supply | RAL 9003  | €€€        | Yes           | low                  | Yes                     | 1,920 per system     | central                          |
| AGR009ML-E | <b>R</b> >  | Central power supply (ML) | Central power supply | Edelstahl | €€€        | Yes           | low                  | Yes                     | 1,920 per system     | central                          |

As of: 04.09.2024 - Subject to technical changes and errors.