



Art.-Nr: AMWA408WL **Exit sign Single Battery** Wall construction flag, Wireless Professional (WL), 8 h, 22 m, IP40, Zinc die-cast, white

Modern zinc die-cast emergency exit sign luminaire for surface mounting on the wall. Thanks to the wall bracket, the escape and emergency routes are identified at right angles to the wall. This can be done on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.







More information www.rp-group.com/en/item/AMWA408WL



TECHNICAL DATA

Luminaire type	Exit sign			
Mounting	Wall construction flag			
Recognition distance	22 m			
Pictograph	Set			
Illuminant	LED			
Housing material	Zinc die-cast			
Housing color	white			
Protection type (IP)	IP40			
Impact resistance (IK)	≥ 3			
Certification	WEEE, CE, ENEC			
Insulation class	2			
Supply	Single Battery			
Monitoring	Wireless Professional (WL)			
Bridging time	8 h			







Battery	LiFePO4 6,4 V/1,2 Ah				
Operating mode	Standby circuit / permanent circuit				
Input voltageAC	230 V				
Input frequency	50 Hz				
Power max.	4,7 W				
Power DS	3,5 W				
Power BS	0,8 W				
Ambient temperature DS	-5 °C - 40 °C				
Ambient temperature BS	-5 °C - 40 °C				
Depth	80 mm				
Width	334 mm				
Height	196 mm				
Weight	1.63				
Weight incl. packaging	1.99				
Connection cross-section	2.5 mm²				
Switching input	Yes				
Emergency light blocking	Yes				
Battery connection	Connector				
Dimming function	Yes				
Customs tariff number	94056180				
EAN	4260682153432				





TECHNICAL DRAWING

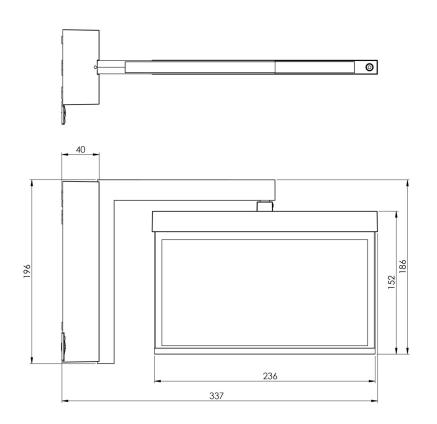

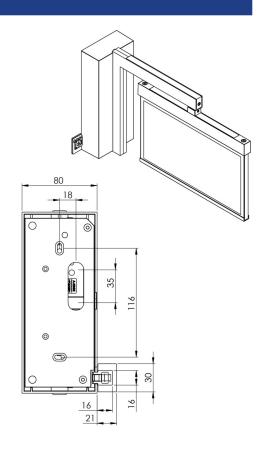

ACCESSORY LIST

 $\label{eq:am-X-APA-Surface-mounted} \mbox{ AM-X-APA - Surface-mounted adapter AM/AX}$

LFP3212.K-SET-2AKKU - CS_VALUE_BatteryTechnology. Battery

RELATED PRODUCTS

ArtN	No.	lmage	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AMW AZ	/A408WL-	₹	Wireless Pro- fessional (WL)	Single battery	RAL 7016	€€	yes	low	yes	1,000 per system	central
AMW E	/A408WL-	3 >	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 28.10.2024 - Subject to technical changes and errors.