



Exit sign Art.-No.: ASMU519CC

ASMU is an innovative aluminium multifunctional edge luminaire for universal mounting (wall/ceiling). It is suited for maintained and non-maintained mode. It's easy to install and has variably useable pictograms to increase planning security. Pictogram set (left, right, straight up and down, blind) included. Signs according to EN 60598-1, EN 60598-2-22 and EN 1838 norms.




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Viewing distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Aluminium
Colour	Alu anodized
Mechanical rating IP	40
Impact resistance IK	3
Protection class	3
Supply	Central power supply system
Monitoring	CC - CoreCompact 24V
Operation time	CPS
Operation mode	maintained/non-maintained mode
Input Voltage AC	24 V
Power consumption max.	2,1 W
Power consumption maintained	2,1 W
Power consumption non-maintained	0,4 W
Ambient temperature maintained mode	-5 °C / 40 °C
Ambient temperature non-maintained mode	-5 °C / 40 °C
Length	54 mm
Width	277 mm
Height	184 mm
Weight	0.75 kg
Weight incl. Packaging	0.92 kg



Connection cross-section	2.5 mm
Switching input L'	No
Emergency light blocking	No
Battery connector	None
Dimming function	Yes
Customs tariff number	94056180
Country of origin	Germany
EAN	4260682156587

TECHNICAL DRAWING

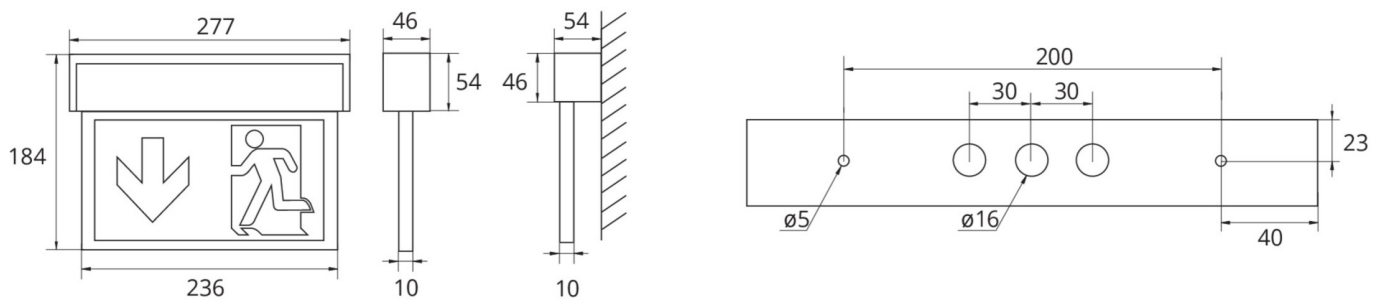

ACCESSORIES

DSA - cord suspension set 1,5m

2PS-EB -