



## Art.-Nr: AXC408WL-AZ Exit sign Single Battery Ceiling mounting, Wireless Professional (WL), 8 h, 30 m, IP20, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information www.rp-group.com/en/item/AXC408WL-AZ





## **TECHNICAL DATA**

| Luminaire type         | Exit sign                  |
|------------------------|----------------------------|
| Mounting               | Ceiling mounting           |
| Recognition distance   | 30 m                       |
| Pictograph             | Set                        |
| Illuminant             | LED                        |
| Housing material       | Zinc die-cast              |
| Housing color          | Anthracite                 |
| Protection type (IP)   | IP20                       |
| Impact resistance (IK) | ≥ 3                        |
| Certification          | WEEE, CE, ENEC             |
| Insulation class       | 2                          |
| Supply                 | Single Battery             |
| Monitoring             | Wireless Professional (WL) |
| Bridging time          | 8 h                        |






| Battery                  | 6,4 V 1,2 Ah/                       |
|--------------------------|-------------------------------------|
| Operating mode           | Standby circuit / permanent circuit |
| Input voltageAC          | 230 V                               |
| Input frequency          | 50 Hz                               |
| Power max.               | 5,6 W                               |
| Power DS                 | 4,5 W                               |
| Power BS                 | 0,8 W                               |
| Ambient temperature DS   | -5 °C - 40 °C                       |
| Ambient temperature BS   | -5 °C - 40 °C                       |
| Depth                    | 80 mm                               |
| Width                    | 312 mm                              |
| Height                   | 181 mm                              |
| Installation length      | 176 mm                              |
| Installation width       | 68 mm                               |
| Installation height      | 40 mm                               |
| Weight                   | 1.71                                |
| Weight incl. packaging   | 2.2                                 |
| Connection cross-section | 2.5 mm²                             |
| Switching input          | Yes                                 |
| Emergency light blocking | Yes                                 |
| Battery connection       | Connector                           |
| Dimming function         | Yes                                 |
| Customs tariff number    | 94056180                            |
| EAN                      | 4260682153609                       |





**TECHNICAL DRAWING** 

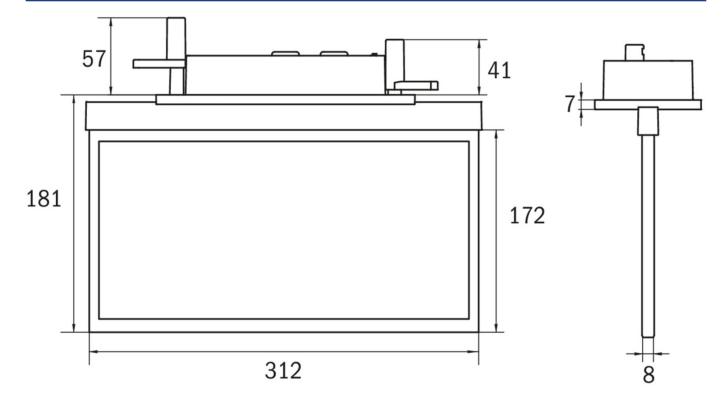

## ACCESSORY LIST

AM-XBE -

LFP3212.K-SET-2AKKU - CS\_VALUE\_BatteryTechnology. Battery

## RELATED PRODUCTS

| ArtNo.     | Image      | Monitoring                      | Supply         | Color     | Investment | Automatic log | Maintenance<br>level | Remote main-<br>tenance | max. luminai-<br>res  | Single luminai-<br>re monitoring |
|------------|------------|---------------------------------|----------------|-----------|------------|---------------|----------------------|-------------------------|-----------------------|----------------------------------|
| AXC408WL   | <b>X →</b> | Wireless Pro-<br>fessional (WL) | Single battery | RAL 9003  | €€         | yes           | low                  | yes                     | 1,000 per sys-<br>tem | central                          |
| AXC408WL-E |            | Wireless Pro-<br>fessional (WL) | Single battery | Edelstahl | €€         | yes           | low                  | yes                     | 1,000 per sys-<br>tem | central                          |

As of: 23.08.2024 - Subject to technical changes and errors.