



## Art.-Nr: AXCP408WL-AZ **Exit sign Single Battery** Ceiling mounting, Wireless Professional (WL), 8 h, 30 m, IP20, Zinc die-cast, Anthracite

Modern zinc die-cast emergency exit sign luminaire with pendant for recessed mounting in the ceiling. Escape and emergency routes can be identified on either one or two sides.

It is part of the A series luminaire family, which provides solutions for any mounting and has won the German Design Award for its uniform, straight-line design.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.







#### More information

www.rp-group.com/en/item/AXCP408WL-



#### **TECHNICAL DATA**

Luminaire type	Exit sign
Mounting	Ceiling mounting
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Zinc die-cast
Housing color	Anthracite
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE, ENEC
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional (WL)
Bridging time	8 h






Battery	6,4 V 1,2 Ah/			
Operating mode	Standby circuit / permanent circuit			
Input voltageAC	230 V			
Input frequency	50 Hz			
Power max.	5,6 W			
Power DS	4,5 W			
Power BS	0,8 W			
Ambient temperature DS	-5 °C - 40 °C			
Ambient temperature BS	-5 °C - 40 °C			
Depth	79 mm			
Width	317 mm			
Height	205 mm			
Installation length	176 mm			
Installation width	68 mm			
Installation height	40 mm			
Weight	1.87			
Weight incl. packaging	2.36			
Connection cross-section	2.5 mm²			
Switching input	Yes			
Emergency light blocking	Yes			
Battery connection	Connector			
Dimming function	Yes			
Customs tariff number	94056180			
EAN	4260682153739			





# **TECHNICAL DRAWING**

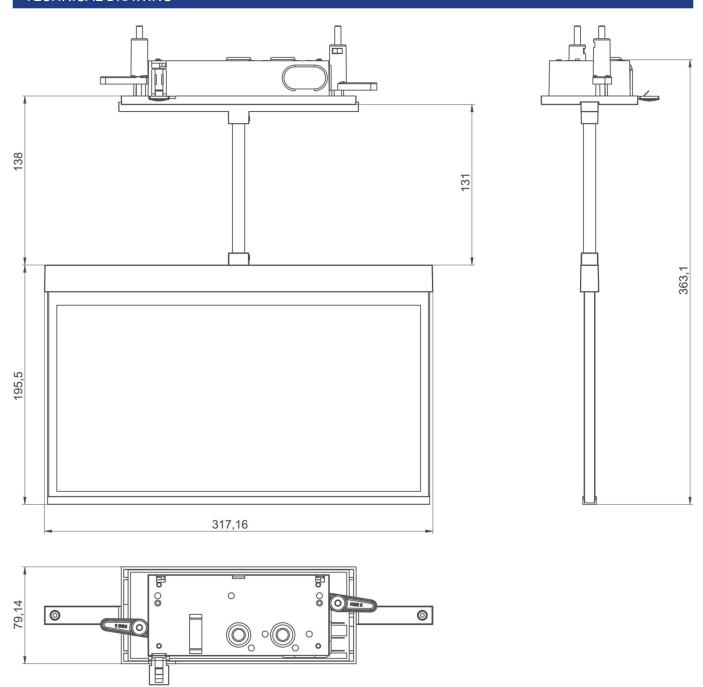

## **ACCESSORY LIST**

AM-XBE -

AM-X-PKG-AZ -

 $LFP3212.K-SET-2AKKU-CS\_VALUE\_BatteryTechnology.\ Battery$ 





# RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
AXCP408WL	<b>₹</b> }	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per system	central
AXCP408WL-E	<b>**</b>	Wireless Pro- fessional (WL)	Single battery	Edelstahl	€€	yes	low	yes	1,000 per system	central

As of: 23.08.2024 - Subject to technical changes and errors.