



**Art.-Nr: AXW401WL**  
**Exit sign Single Battery**  
**Wall, Wireless Professional, 1 h, 30 m, IP40, Zinc die-cast, white**

The AXW is a zinc-diecast exit sign for wall mounting and for the marking of escape routes. It is part of a complete luminaire series, which features solutions for every mounting situation and was honored with the German Design Award. Luminaires of the A-Series are equipped with modern LED illuminants and offer flexibility with changeable pictograms.

LED exit sign according to EN 60598-1, EN 60598-2-22, EN 7010 and EN 1838



More information




## TECHNICAL DATA

|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | Exit sign                           |
| Mounting               | Wall                                |
| Recognition distance   | 30 m                                |
| Pictograph             | Set                                 |
| Illuminant             | LED                                 |
| Housing material       | Zinc die-cast                       |
| Housing color          | white                               |
| Protection type (IP)   | IP40                                |
| Impact resistance (IK) | ≥ 3                                 |
| Certification          | WEEE, CE, ENEC                      |
| Insulation class       | 2                                   |
| Supply                 | Single Battery                      |
| Monitoring             | Wireless Professional               |
| Bridging time          | 1 h                                 |
| Battery                | LFP3212.K-SET-2AKKU                 |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltageAC        | 230 V                               |
| Input frequency        | 50 Hz                               |
| Power max.             | 5,6 W                               |
| Power DS               | 4,5 W                               |



|                          |                     |
|--------------------------|---------------------|
| Power BS                 | 0,8 W               |
| Ambient temperature DS   | -5 °C - 40 °C       |
| Ambient temperature BS   | -5 °C - 40 °C       |
| Depth                    | 50 mm               |
| Width                    | 312 mm              |
| Height                   | 194 mm              |
| Weight                   | 1.76                |
| Weight incl. packaging   | 2.25                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | Yes                 |
| Battery connection       | Connector           |
| Dimming function         | Yes                 |
| Customs tariff number    | 94056180            |
| EAN                      | 4260682149398       |

## TECHNICAL DRAWING

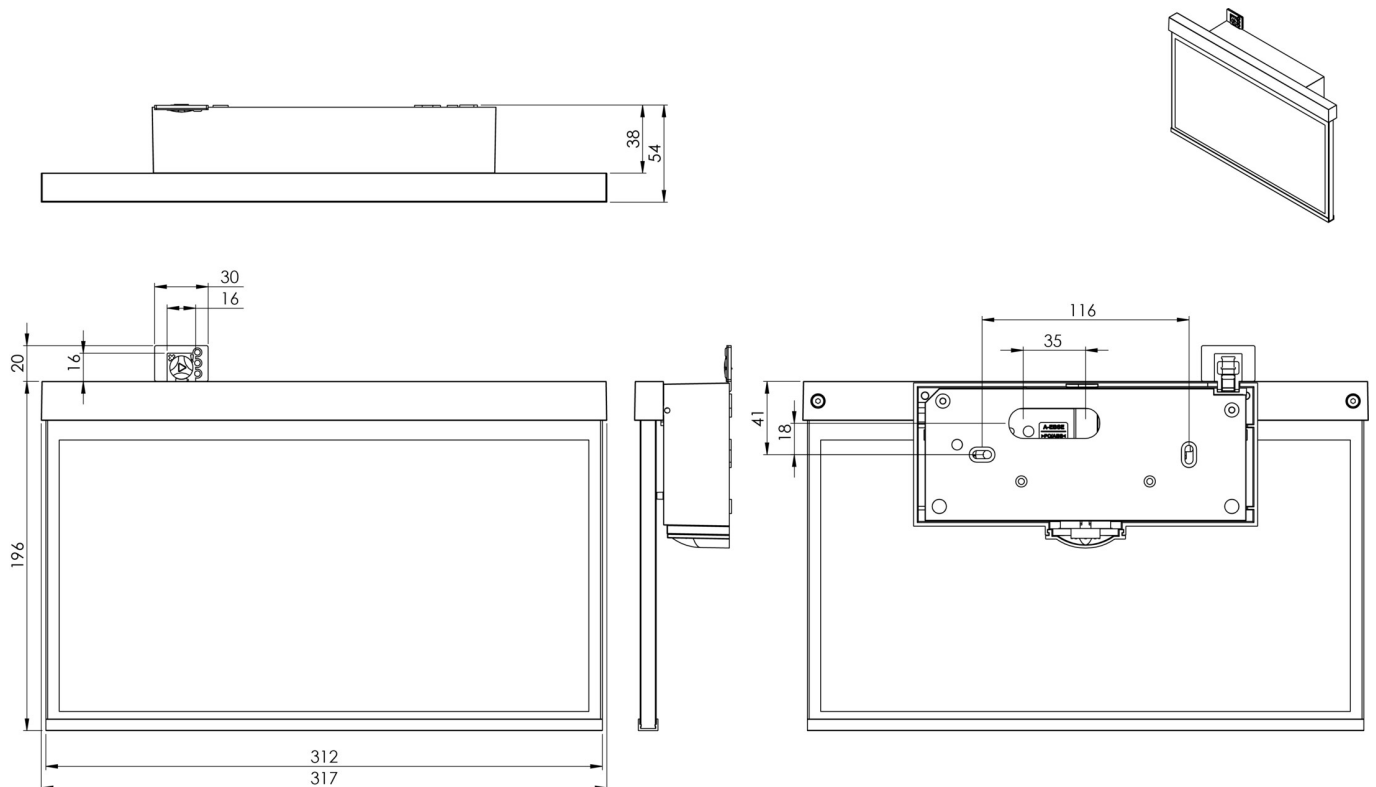



## ACCESSORY LIST

BALLPLX-AX -

AM-X-APA -

LFP3212.K-SET-2AKKU - LiFePO4 Battery

## RELATED PRODUCTS

| Art-No.     | Image   | Monitoring            | Supply         | Color | Investment | Automatic log | Maintenance level | Remote maintenance | max. luminaires  | Single luminaire monitoring |
|-------------|---|-----------------------|----------------|-------|------------|---------------|-------------------|--------------------|------------------|-----------------------------|
| AXW401WL-AZ |   | Wireless Professional | Single battery |       | €€         | yes           | low               | yes                | 1,000 per system | central                     |
| AXW401WL-E  |  | Wireless Professional | Single battery |       | €€         | yes           | low               | yes                | 1,000 per system | central                     |

As of: 16.07.2024 - Subject to technical changes and errors.