



Art.-Nr: C-MA-AP01

Remote display optical and acoustic for surface mounting in a compact design. It shows the status of the CoreCompact / CC24 system at a central location.


The visual display is via 3 LEDs. In the event of malfunctions, an acoustic message is also issued. The acoustic message can be acknowledged by pressing the "Signal tone OFF" button, whereby the error message (visual display) as such is not affected.






More information

TECHNICAL DATA


Protection type (IP)	IP40
Power consumption	1 W
Depth	81 mm
Width	81 mm
Height	55 mm
Weight	kg
Customs tariff number	85389091
Country of origin	DEUTSCHLAND



TECHNICAL DRAWING

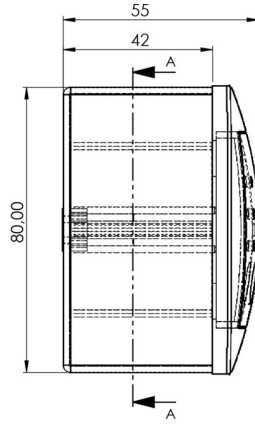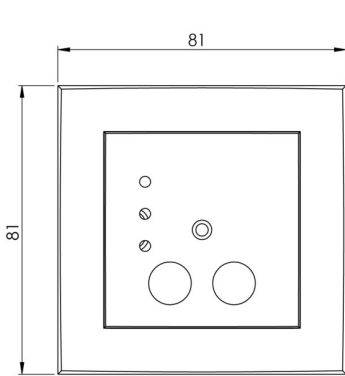

SCHNITT A-A

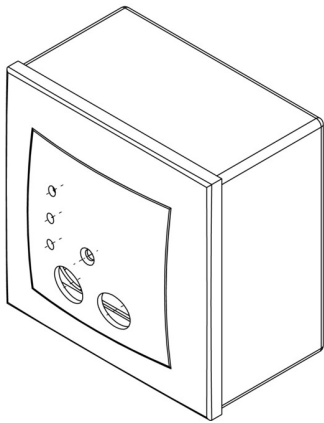

F
—
E
—
D
—
C
—

stand: 21.06.2024 - Subject to technical changes and errors.