



**Art.-Nr: HO-2708DG-WW**  
**LED outdoor luminaire "TONDO", wall / ceiling surface**  
**mounting, round, 280x80mm, 13W, 1000lm, 3000K, CRI >80,**  
**IP54, anthracite, switchable**

LED exterior façade luminaire, Tondo series. Housing made from die-cast aluminium, dark grey or white, powder-coated, IP54. Diffuser made from plastic (PC), opal, UV-stabilised. Operating unit installed (can be switched). Version with CASAMBI® Bluetooth control available.



Mer informasjon

### TEKNISKE DATA


Dimensjoner	
diameter	280 mm
Produktmål høyde	80 mm
Produktvekt	1.84 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	330 mm
Emballasjemål bredde	330 mm
Emballasjemål høyde	100 mm
Vekt inkludert emballasje	1.95 kg
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
IP-beskyttelse)	IP54
Elektrisk forbindelse	
Systemytelse	13 W
Inngangsspenning AC	220-240V / 50-60Hz V
Maktfaktor	0.95 PF
Strømforsyning	
Elektrisk versjon	med intern driftsenhet, Byttbar
Lystekniske data	



lyskilde	LED
Nominell lysstrøm	985 lm
Fargegjengivelsesindeks	> 80 Ra
Strålevinkel	119 °
fargetemperatur	3000 K
lys farge	830
UGR	24.2
levetid	50000 h, L80
<b>temperaturer</b>	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	40 °C
<b>Monteringstype</b>	
Monteringstype	Veggkonstruksjon, Takkonstruksjon
<b>Farge</b>	
Farge	Svart



TEXT.LICHTVERTEILUNG

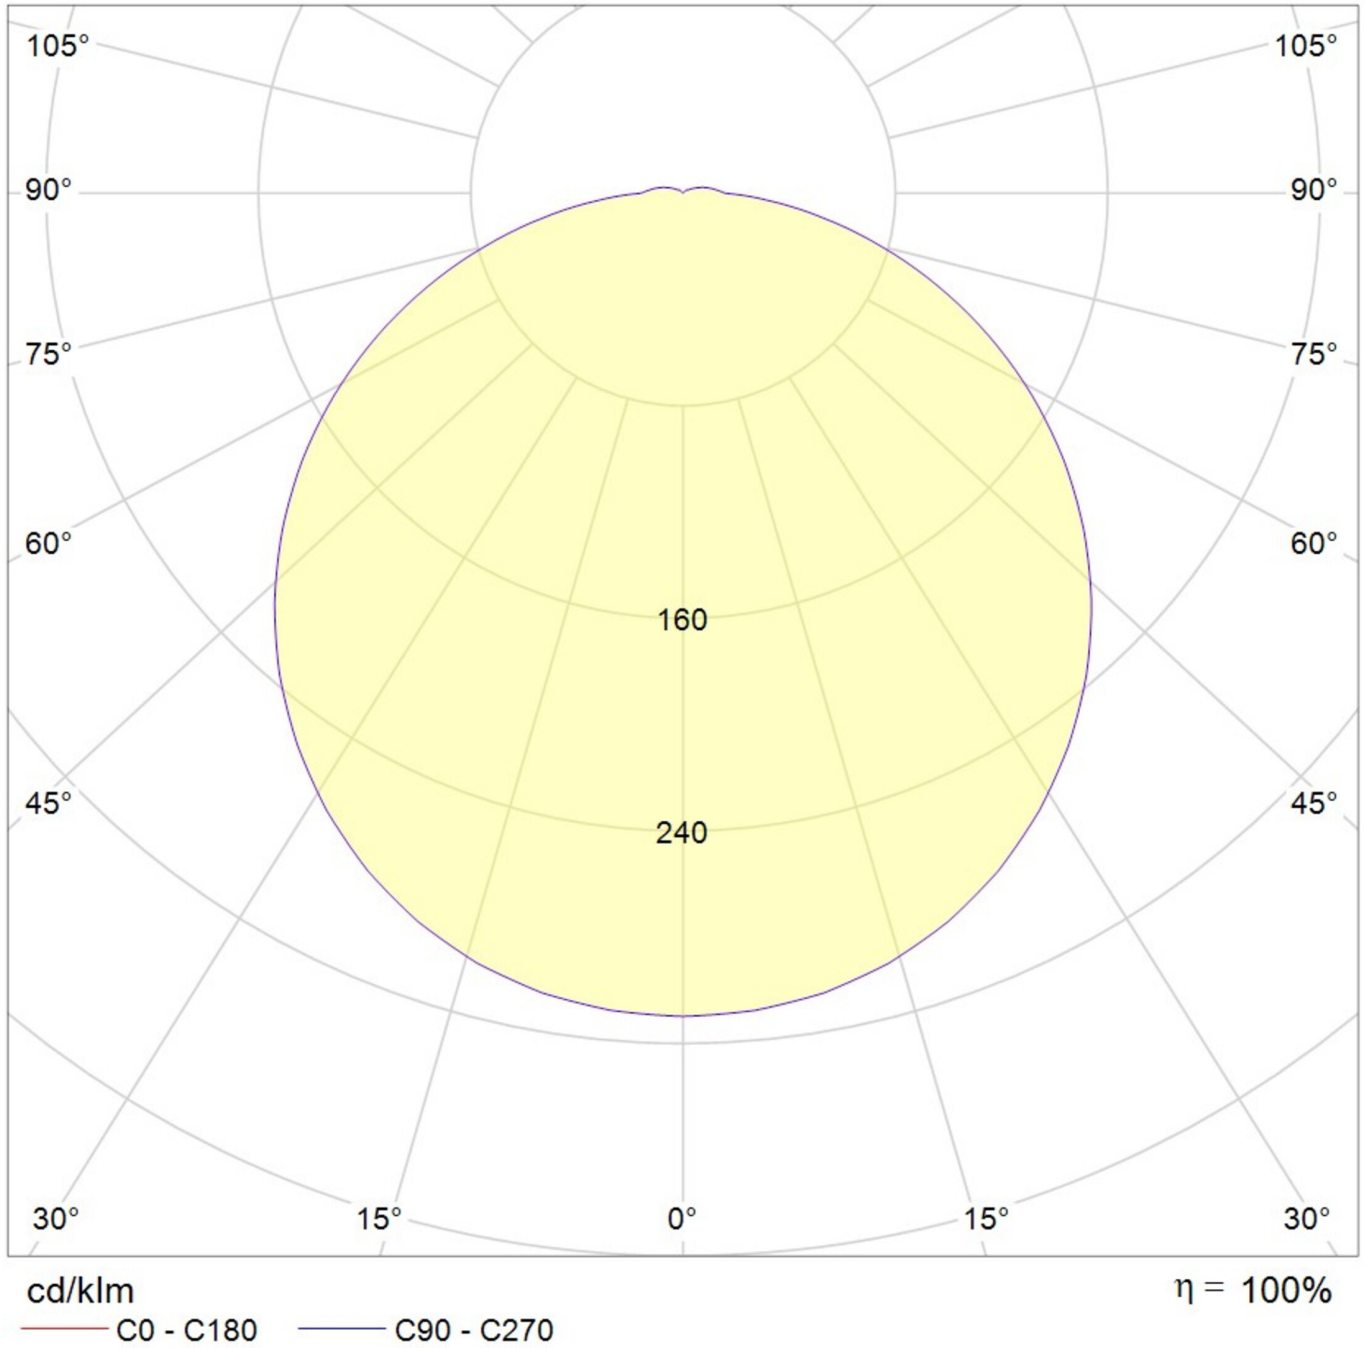

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.