



## Art.-Nr: KAMU403WL

Plastic emergency exit sign luminaire for universal mounting. The cuboid plastic housing is discreetly reduced to the essentials. The high level of protection permits use in damp rooms or highly contaminated environments.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Display edge luminaire with integrated light distribution for even pictogram illumination. Suited to inscription on one or two sides. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes the option of mounting the luminaire either on the wall or ceiling.



More information

[www.rp-group.com/en/item/KAMU403WL](http://www.rp-group.com/en/item/KAMU403WL)



### TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	7
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional (WL)
Bridging time	3 h
Battery	6,4 V 1,2 Ah/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz



Power max.	4,7 W
Power DS	3,5 W
Power BS	0,8 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	326 mm
Width	50 mm
Height	204 mm
Weight	0.23
Weight incl. packaging	0.43
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
Customs tariff number	94056120
EAN	4260766551529



TECHNICAL DRAWING

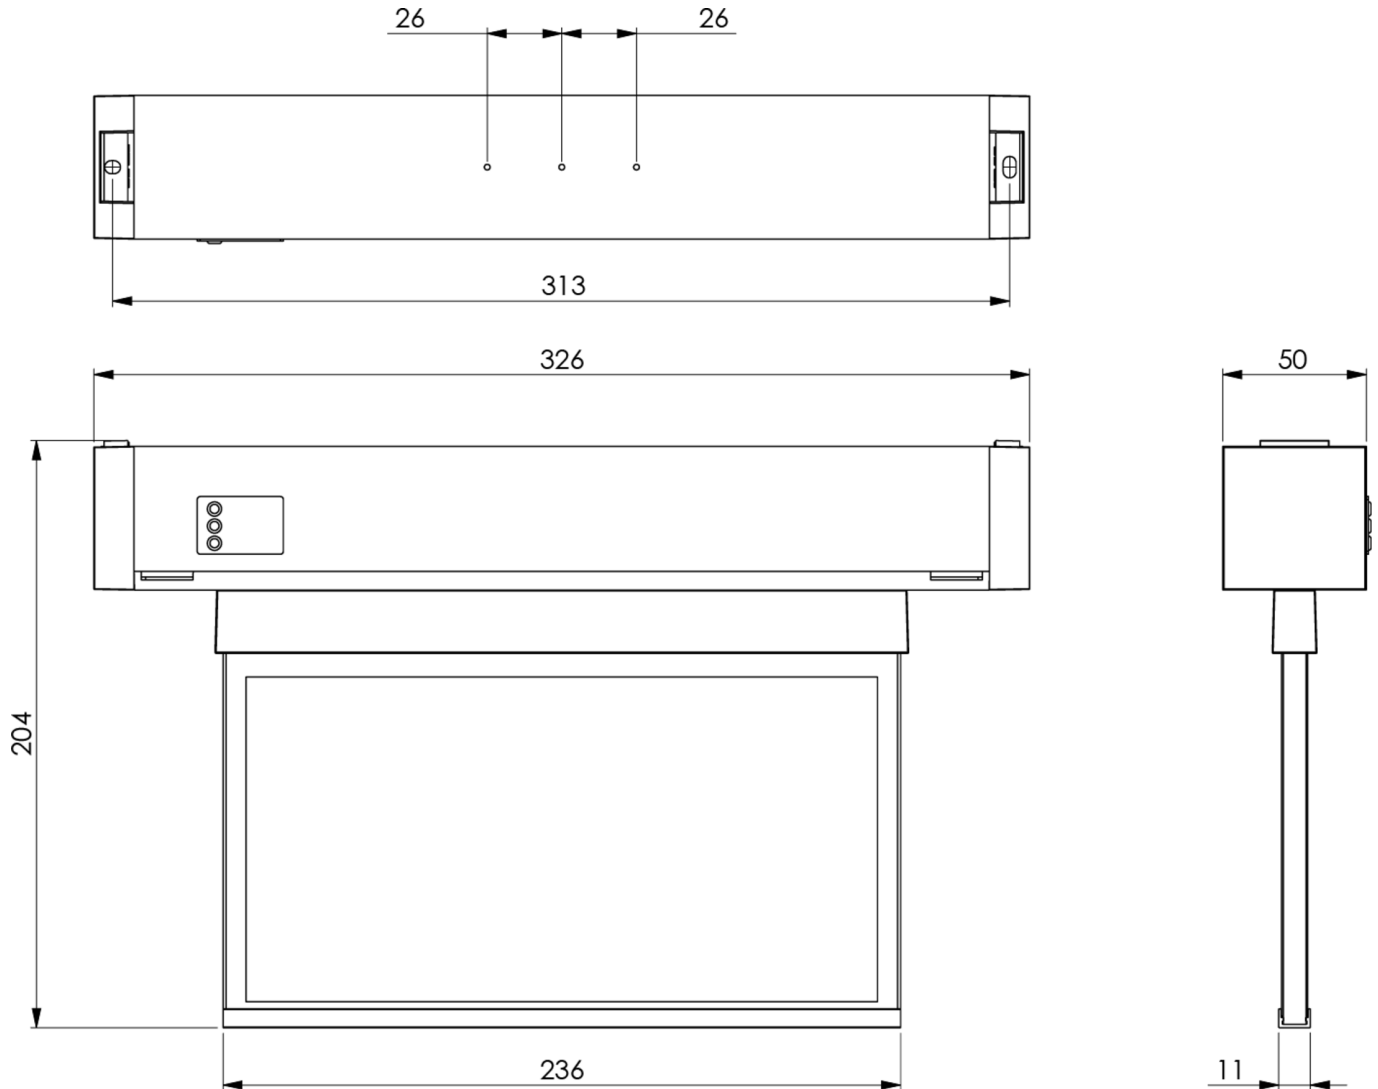

As of: 23.08.2024 - Subject to technical changes and errors.