



Art.-Nr: KAMU408SC

Exit sign

Universal, SelfControl (SC), 8 h, 22 m, IP65, Plastic, white

Plastic emergency exit sign luminaire for universal mounting. The cuboid plastic housing is discreetly reduced to the essentials. The high level of protection permits use in damp rooms or highly contaminated environments.

Automatic monitoring of safety luminaire with SelfControl. Display edge luminaire with integrated light distribution for even pictogram illumination. Suited to inscription on one or two sides. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes the option of mounting the luminaire either on the wall or ceiling.



More information

www.rp-group.com/en/item/KAMU408SC




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	7
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/1,2 Ah
Power max.	2,6 W
Power DS	1,7 W
Power BS	0,9 W



Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	326 mm
Width	50 mm
Height	204 mm
Weight	0.16
Weight incl. packaging	0.36
Customs tariff number	94056120
EAN	4260766551475

TECHNICAL DRAWING

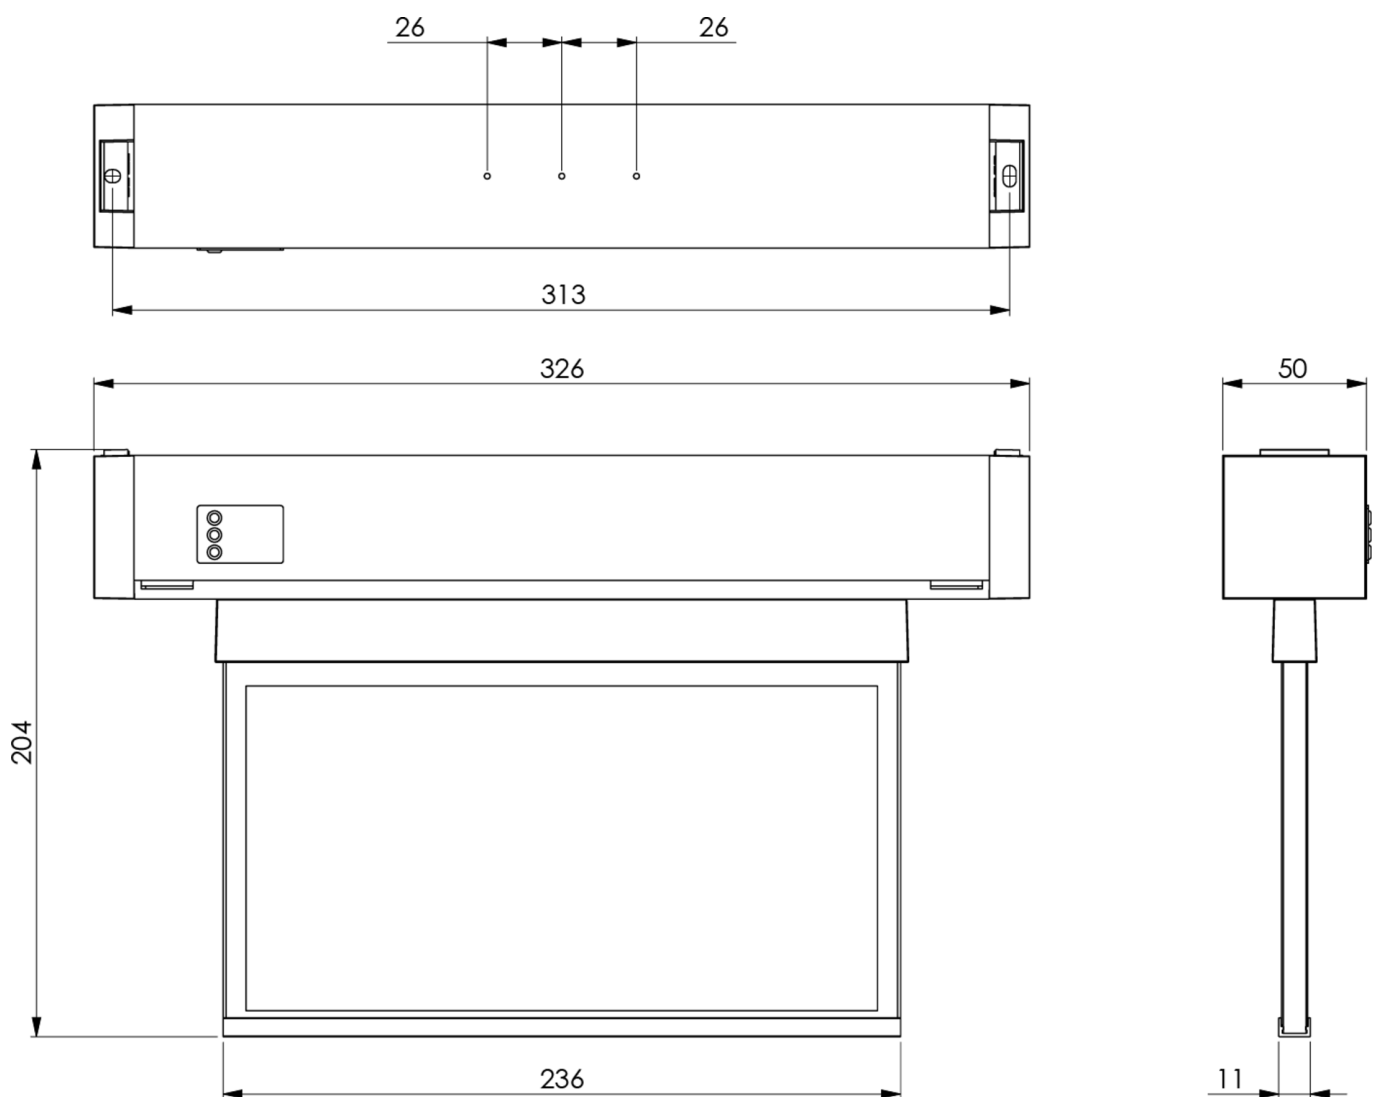

As of: 29.10.2024 - Subject to technical changes and errors.