



Art.-Nr: KAXU401WL

Plastic emergency exit sign luminaire for universal mounting. The cuboid plastic housing is discreetly reduced to the essentials. The high level of protection permits use in damp rooms or highly contaminated environments.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. Display edge luminaire with integrated light distribution for even pictogram illumination. Suited to inscription on one or two sides. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes the option of mounting the luminaire either on the wall or ceiling.



More information

www.rp-group.com/en/item/KAXU401WL



TECHNICAL DATA


| | |
|------------------------|-------------------------------------|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 7 |
| Certification | CE, WEEE |
| Insulation class | 2 |
| Supply | Single Battery |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 1 h |
| Battery | 6,4 V 1,2 Ah/ |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 230 V |
| Input frequency | 50 Hz |



| | |
|--------------------------|---------------------|
| Power max. | 5,6 W |
| Power DS | 4,5 W |
| Power BS | 0,8 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 326 mm |
| Width | 50 mm |
| Height | 248 mm |
| Weight | 0.23 |
| Weight incl. packaging | 0.43 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056120 |
| EAN | 4260766551611 |



TECHNICAL DRAWING

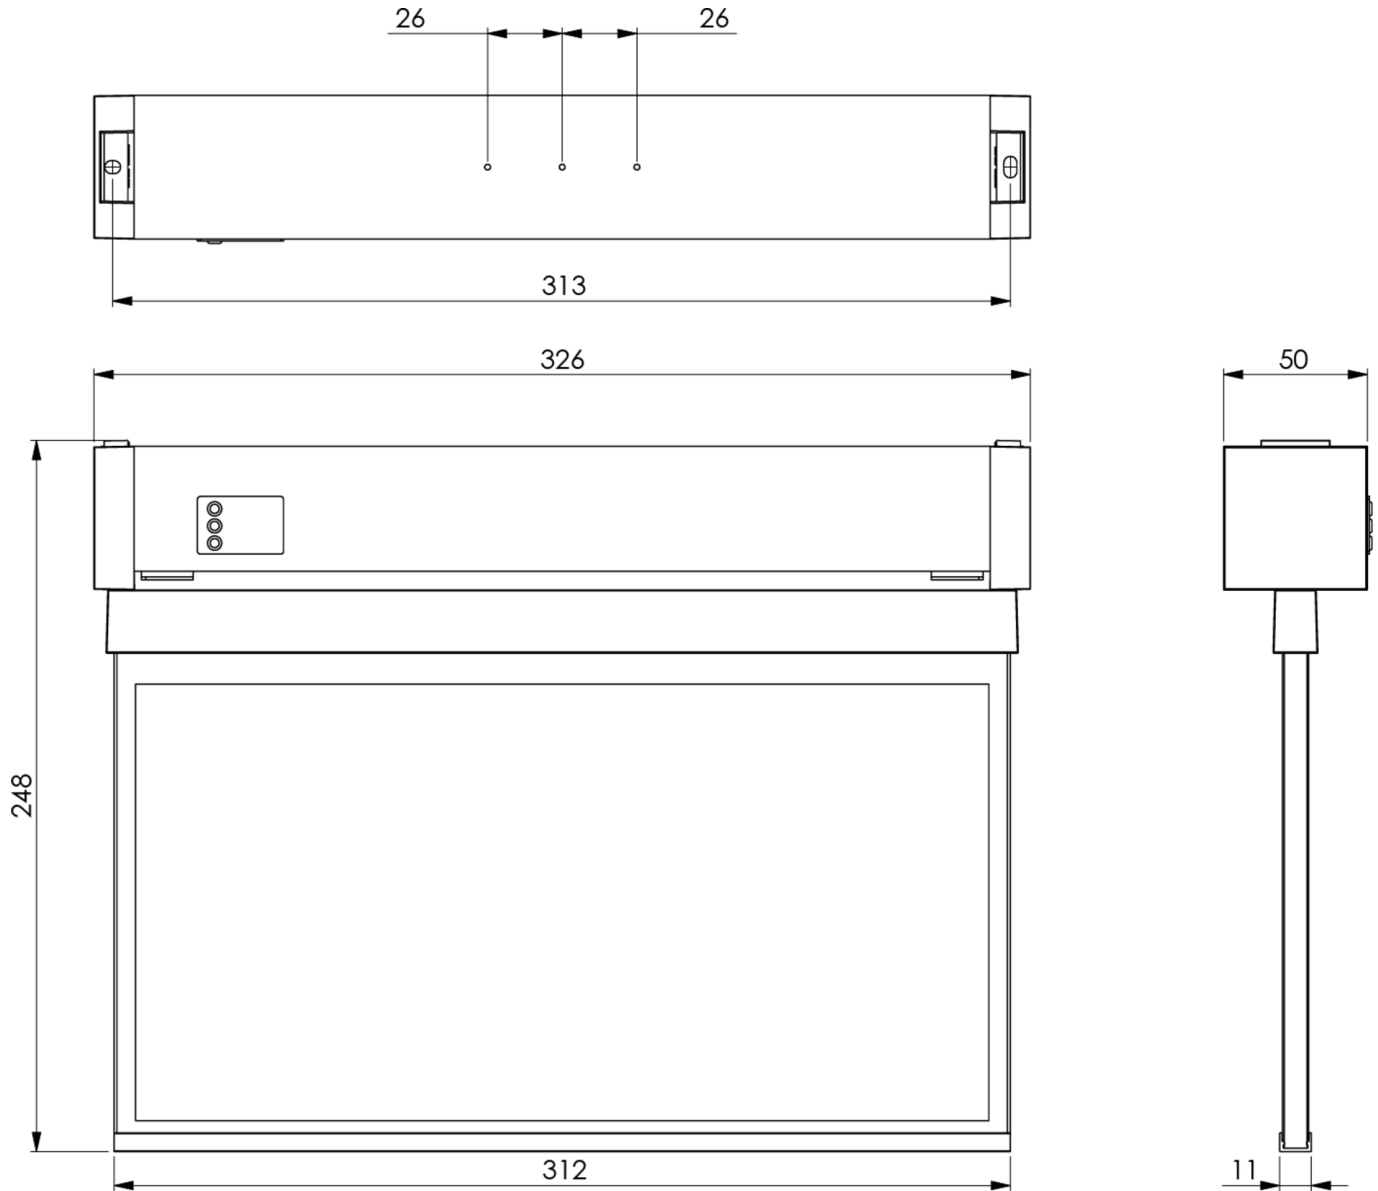

As of: 23.08.2024 - Subject to technical changes and errors.