



Art.-Nr: KAXU509CC

Cuboid polycarbonate luminaire design, discreetly reduced to the essentials. The design and universal installation is based on the KB luminaire, whereby the edge for holding the escape sign is permanently installed. The luminaires are equipped with modern LED lighting devices and offer flexibility through interchangeable pictograms.

LED escape sign luminaire according to DIN EN 60598-1, DIN EN 60598-2-22, DIN EN 7010 and DIN EN 1838.



More information



TECHNICAL DATA


| | |
|------------------------|-------------------------------------|
| Luminaire type | Exit sign |
| Mounting | Universal |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP64 |
| Impact resistance (IK) | 7 |
| Certification | CE, WEEE |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | CoreCompact 24 |
| Bridging time | CPS |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 24 V |
| Power max. | 3,4 W |
| Power DS | 3,4 W |
| Power BS | 0,4 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |



| | |
|--------------------------|---------------------|
| Depth | 326 mm |
| Width | 50 mm |
| Height | 248 mm |
| Weight | 0.01 |
| Weight incl. packaging | 0.21 |
| Connection cross-section | 2.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Luminous flux mains | 230 lm |
| Luminous flux emergency | 230 lm |
| Customs tariff number | 94056120 |
| EAN | 4260766551666 |



TECHNICAL DRAWING

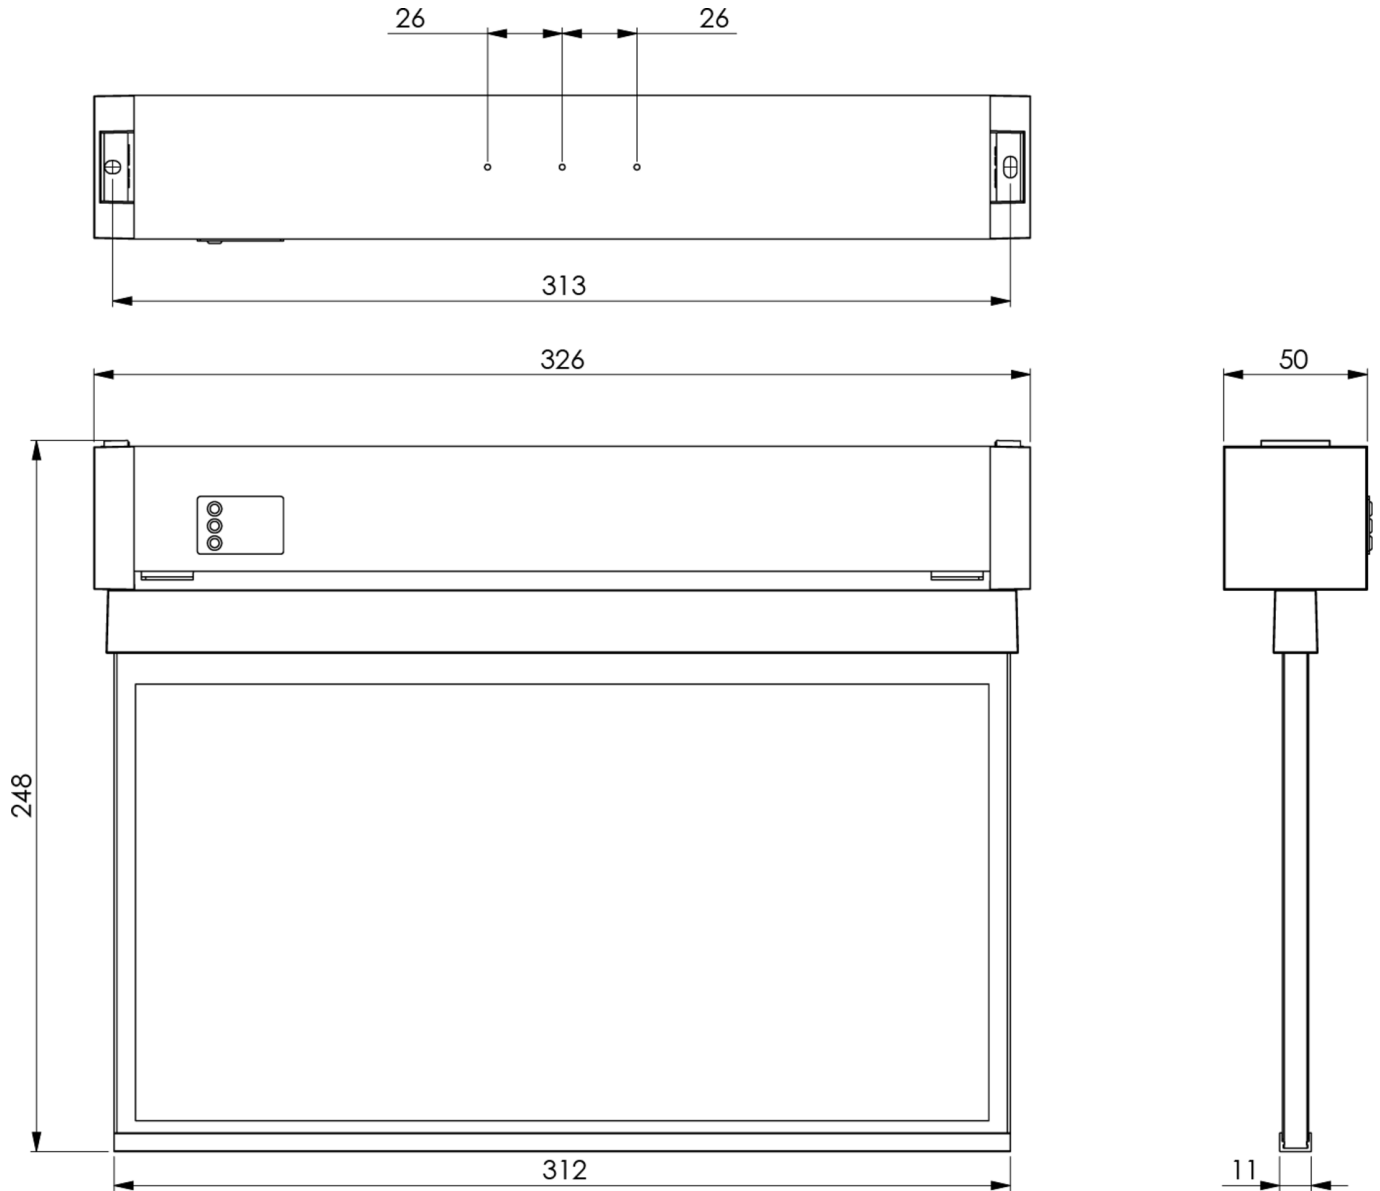

As of: 22.07.2024 - Subject to technical changes and errors.