



Art.-Nr: KBU418SC Exit sign, Safety luminaire Universal, 8 h, 14 m, 22 m, 30 m, IP65, Plastic, white

Flexible plastic safety luminaire for universal mounting, which can be extended to become an emergency exit sign luminaire. The cuboid plastic housing is discreetly reduced to the essentials.

Because of the modular system, the luminaire can be converted into an emergency exit sign luminaire without any tools and without having to be disassembled. The panes for fitting the pictograms are available separately.

The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information www.rp-group.com/en/item/KBU418SC



TECHNICAL DATA


Luminaire type	Exit sign, Safety luminaire
Mounting	Universal
Recognition distance	14 m, 22 m, 30 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	WEEE, TÜV Rheinland Type approved, CE, ENEC
Insulation class	2
Bridging time	8 h
Battery	LiFePO4 6,4 V/1,6 Ah
Power max.	2,6 W
Power DS	1,7 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 35 °C





Ambient temperature BS	-5 °C - 40 °C
Depth	412 mm
Width	50 mm
Height	298 mm
Weight	0.1
Weight incl. packaging	0.15
Luminous flux mains	60 lm
Luminous flux emergency	60 lm
Customs tariff number	94056120
EAN	4262483024034

TECHNICAL DRAWING

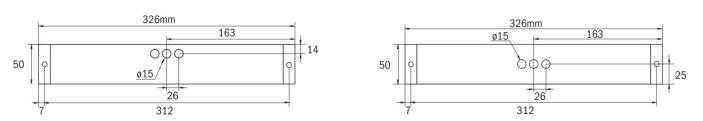

ACCESSORY LIST

KBK -

KBM -

KBG -

AWX001 -

KBE - Mounting frame

BALLPLX-KBE - Wire mesh surround

BALLPLX-KBS - Wire mesh surround

BALLPLX-KBU - Wire mesh surround

2PW-EB - Pendant

2DW-EB -

KBBE - Flush-mounted box

DSA - Wire suspension

As of: 01.11.2024 - Subject to technical changes and errors.