



Art.-Nr: KCW013SC-IP64 Exit sign Single Battery Wall mounting, SelfControl (SC), 3 h, 30 m, IP64, Plastic, white

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.





More information

www.rp-group.com/en/item/KCW013SC-IP64



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|-------------------------------------|
| Mounting | Wall mounting |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP64 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE |
| Insulation class | 2 |
| Supply | Single Battery |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | NIMH 4,8 V/2,0 Ah |
| Operating mode | Standby circuit / permanent circuit |






| Input voltageAC | 230 V |
|--------------------------|----------------|
| Input frequency | 50 / 60 Hz |
| Power max. | 6,1 W |
| Power DS | 4,5 W |
| Power BS | 0,35 W |
| Ambient temperature DS | -5 °C to 40 °C |
| Ambient temperature BS | -5 °C to 40 °C |
| Depth | 60 mm |
| Width | 340 mm |
| Height | 170 mm |
| Weight | 0.82 |
| Weight incl. packaging | 0.91 |
| Connection cross-section | 2.5 mm² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Luminous flux mains | 220 lm |
| Luminous flux emergency | 150 lm |
| Customs tariff number | 94056120 |
| EAN | 4260581712488 |





TECHNICAL DRAWING

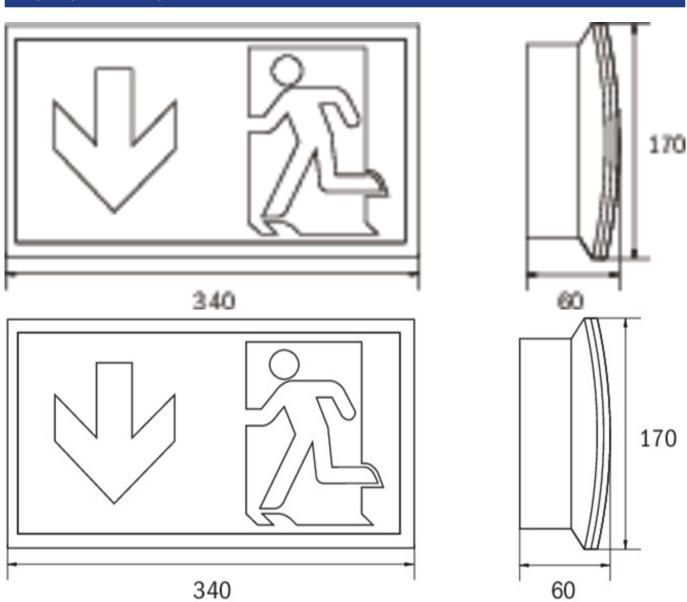

ACCESSORY LIST

BALL2 - Wire mesh guard

DWKCW -

KC-IP65 -

KCER - Mounting frame

KCWFH - Wall holder





RELATED PRODUCTS

| ArtNo. | Image | Monitoring | Supply | Color | Investment | Automatic log | Maintenance level | Remote main- tenance | max. luminai- res | Single luminai- re monitoring |
|-----------------------|----------|---------------------------------|----------------|----------|------------|---------------|----------------------|-------------------------|----------------------|----------------------------------|
| KCW013-IP64 | ₹ | Without monitoring | | RAL 9003 | | | | | | |
| KCW013-P- IP64 | ₹ | Without monitoring | | RAL 9003 | | | | | | |
| KCW013SC- IP64-LEX | ₹ | SelfControl (SC) | Single battery | RAL 9003 | € | no | high | no | unlimited | itself |
| KCW013SC-P-IP64 | ₹ | SelfControl (SC) | Single battery | RAL 9003 | € | no | high | no | unlimited | itself |
| KCW013WL- IP64 | ₹ | Wireless Pro- fessional (WL) | Single battery | RAL 9003 | €€ | yes | low | yes | 1,000 per system | central |

As of: 18.12.2024 - Subject to technical changes and errors.