



Art.-Nr: KCW019-IP64
Exit sign, Safety luminaire Centralised power supply systems
Wall, Without monitoring, CPS, 30 m, IP64, Plastic, white

Slim convex plastic luminaire.

Use as an emergency exit sign luminaire for wall mounting in which the set of plug-in pictograms is fitted on the inside without the use of solvents.

Or without the use of pictograms as a safety luminaire with the crystal-clear cover included, preferably for ceiling mounting.

The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

www.rp-group.com/en/item/KCW019-IP64



TECHNICAL DATA


| | |
|------------------------|---|
| Luminaire type | Exit sign, Safety luminaire |
| Mounting | Wall |
| Recognition distance | 30 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP64 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, ENEC, TÜV Rheinland Type approved |
| Insulation class | 2 |
| Supply | Centralised power supply systems |
| Monitoring | Without monitoring |
| Bridging time | CPS |
| Battery | / |



| | |
|--------------------------|---------------------|
| Operating mode | Permanent circuit |
| Input voltageAC | 230 V |
| Input frequency | 50 / 60 Hz |
| Input voltage DC | 100-254 V |
| Power max. | 4,5 W |
| Power DS | 4,5 W |
| Power BS | 0 W |
| Ambient temperature DS | -25 °C - 40 °C |
| Ambient temperature BS | -25 °C - 40 °C |
| Depth | 60 mm |
| Width | 340 mm |
| Height | 170 mm |
| Weight | 0.67 |
| Weight incl. packaging | 0.76 |
| Connection cross-section | 1.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 300 lm |
| Luminous flux emergency | 300 lm |
| Customs tariff number | 94056120 |
| EAN | 4260581712815 |



TECHNICAL DRAWING

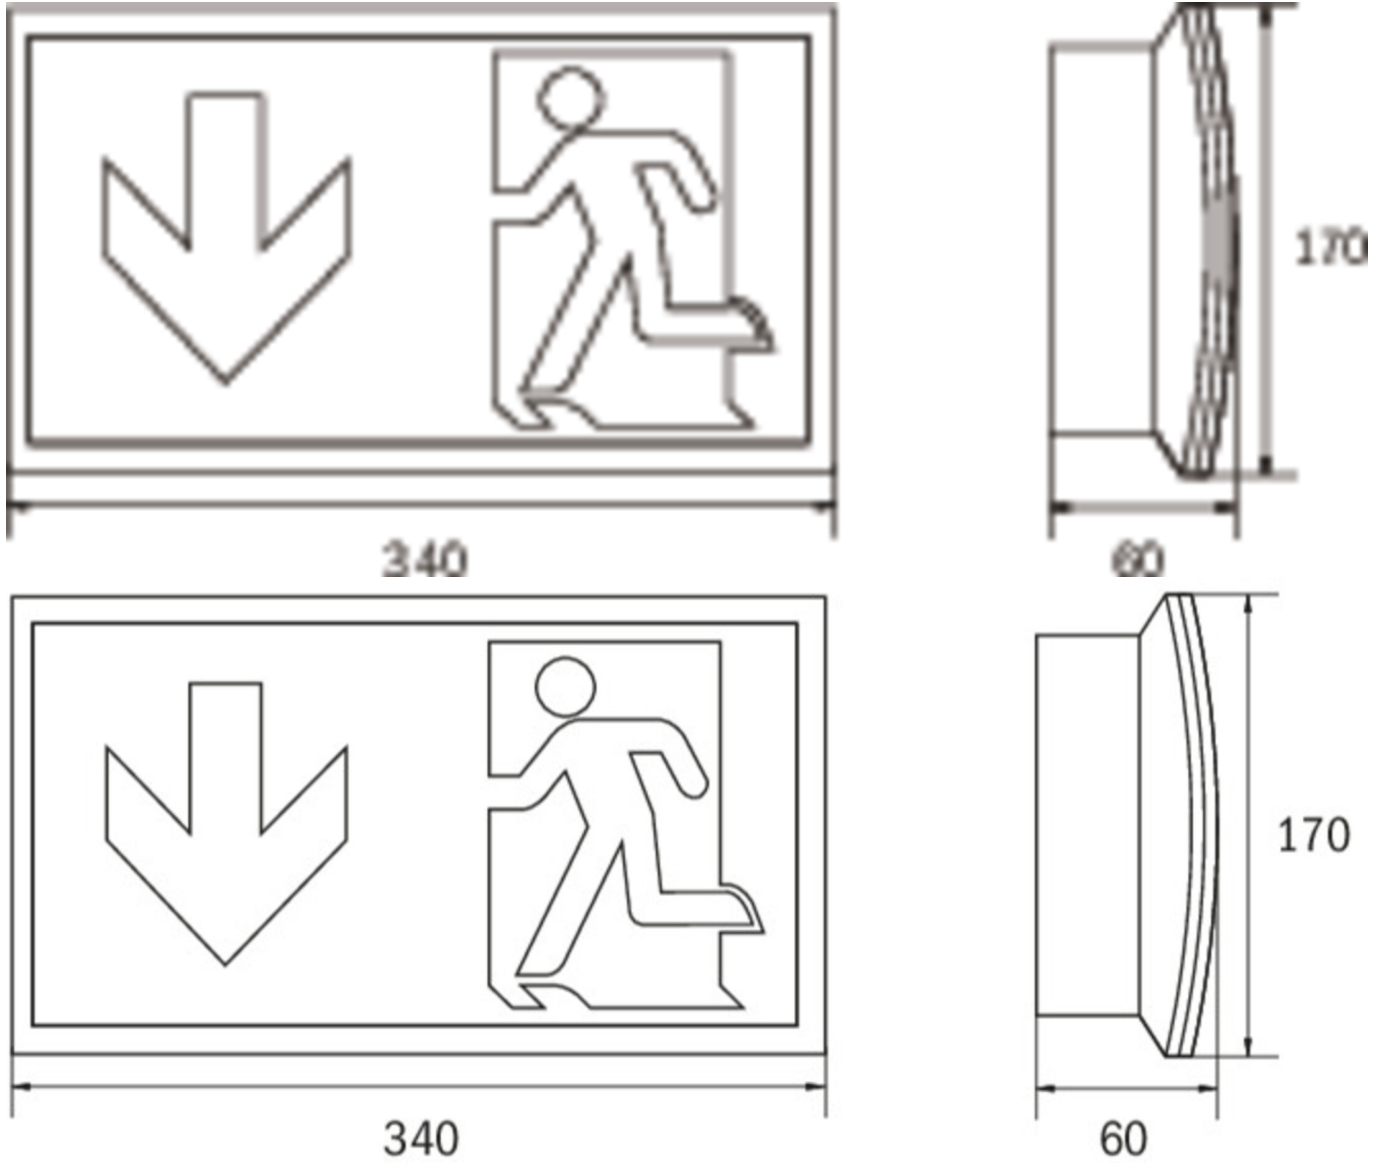

ACCESSORY LIST

- BALL2 - Wire mesh guard
- DWKCW -
- KC-IP65 -
- KCER - Mounting frame
- KCWFH - Wall holder

As of: 04.09.2024 - Subject to technical changes and errors.