



**Art.-Nr: KDU418SC**

**Exit sign**

**Universal, SelfControl (SC), 8 h, 22 m, IP43, Plastic, white**

Box-shaped plastic emergency exit sign luminaire for universal mounting. Suited to inscription on one or two sides.

Using the adapter supplied, the luminaire can also be mounted out from the wall. The additional downward light emission helps to illuminate emergency and escape routes.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

[www.rp-group.com/en/item/KDU418SC](http://www.rp-group.com/en/item/KDU418SC)




## TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	22 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/1,2 Ah
Power max.	2,6 W
Power DS	1,7 W



Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	70 mm
Width	260 mm
Height	155 mm
Weight	0.78
Weight incl. packaging	0.98
EAN	4262483022726

## TECHNICAL DRAWING

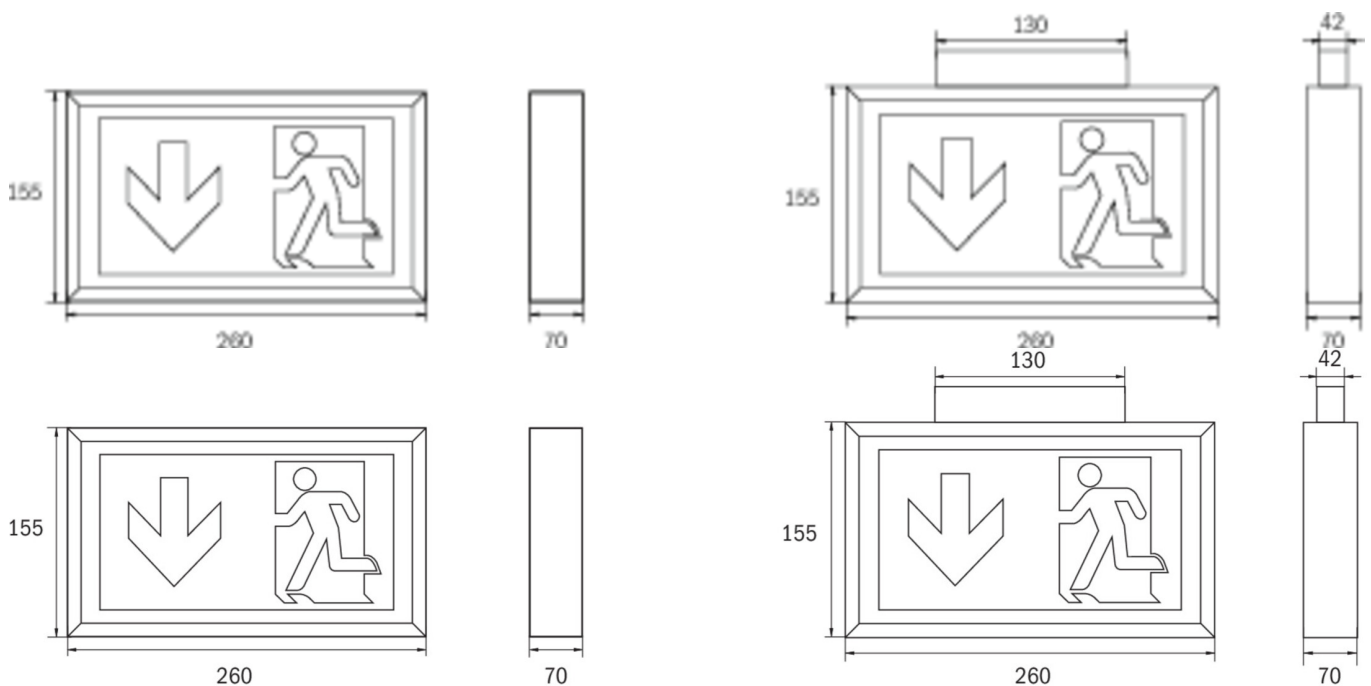

## ACCESSORY LIST

- DSA - Wire suspension
- BALL1 - Wire mesh guard
- 2PW-EB - Pendant
- 2DW-EB -
- BALLPLX-KD - Wire mesh surround

As of: 01.11.2024 - Subject to technical changes and errors.