



# GROUP

SOLUTIONS IN SAFETY + LIGHTING

[www.rp-group.com](http://www.rp-group.com)

**Art.-Nr: KEU428SC**

**Safety luminaire Supply**

**Universal, SelfControl (SC), 8 h, , IP40, Plastic, white**

Compact plastic safety luminaire for universal mounting for illuminating escape and emergency routes.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with **SelfControl**. The luminaire is fitted with the innovative **flexible plug-in system** for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

[www.rp-group.com/en/item/](http://www.rp-group.com/en/item/KEU428SC)

[KEU428SC](http://www.rp-group.com/en/item/KEU428SC)




## Technical Data

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/3,3 Ah

Power max.	5,3 W
Power DS	3,9 W
Power BS	2 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	332 mm
Width	48 mm
Height	72 mm
Weight	0.55
Weight incl. packaging	0.59
Luminous flux mains	210 lm
Luminous flux emergency	210 lm
EAN	4262483022740

## Technical drawing

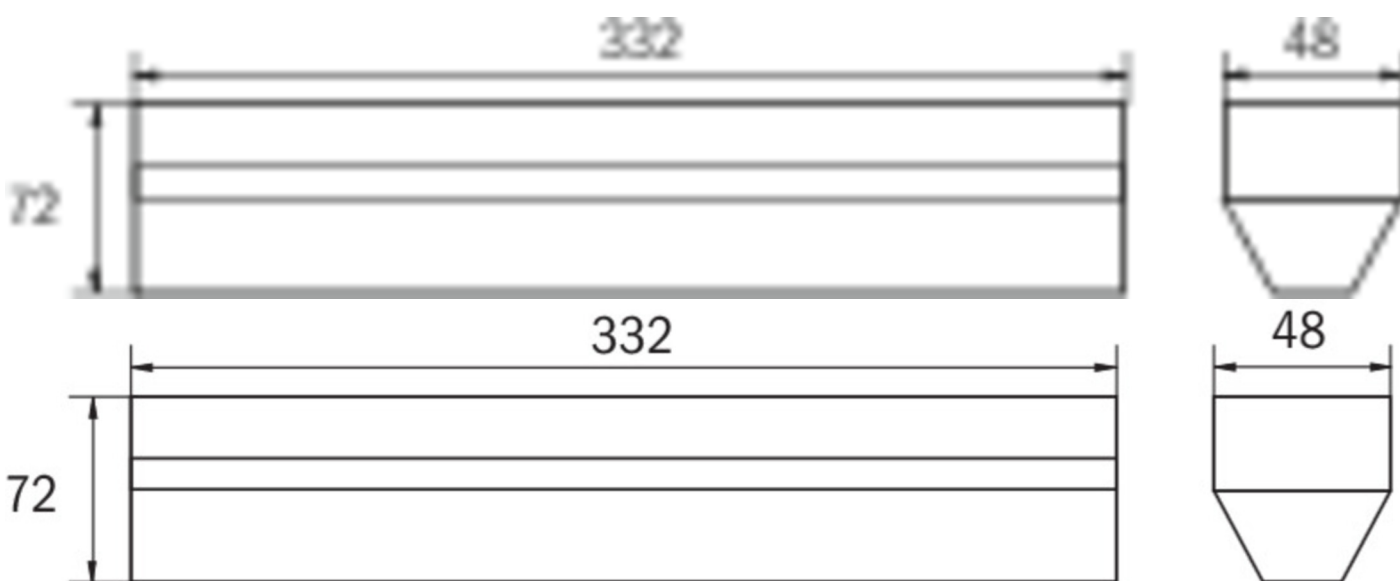

## Accessory List

DSA - Wire suspension

KEE-EB -

2PW-EB - Pendant

2DW-EB -

KXBE -

As of: 06.11.2024 - Subject to technical changes and errors.