



Art.-Nr: KLU519CC
Exit sign Centralised power supply systems
Universal, CoreCompact 24, CPS, 34 m, IP43, Plastic, white

Slim design high-grade plastic luminaire for universal mounting (wall/ ceiling or as wall bracket with the included adapter). This luminaire provides additional downwards lighting to enhance safety at the egress route. Applicable for maintained or non-maintained operation mode. The easy to install and universally useable pictograms provide planning security. Signs according EN 60598-1, EN 60598-2-22 and EN 1838 norms.



More information




TECHNICAL DATA

Luminaire type	Exit sign
Mounting	Universal
Recognition distance	34 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	3
Supply	Centralised power supply systems
Monitoring	CoreCompact 24
Bridging time	CPS
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	4,9 W
Power DS	4,9 W
Power BS	0,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C



Depth	78 mm
Width	390 mm
Height	220 mm
Weight	1.2
Weight incl. packaging	1.36
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Luminous flux mains	340 lm
Luminous flux emergency	340 lm
Customs tariff number	94056120
EAN	4260682157386

TECHNICAL DRAWING

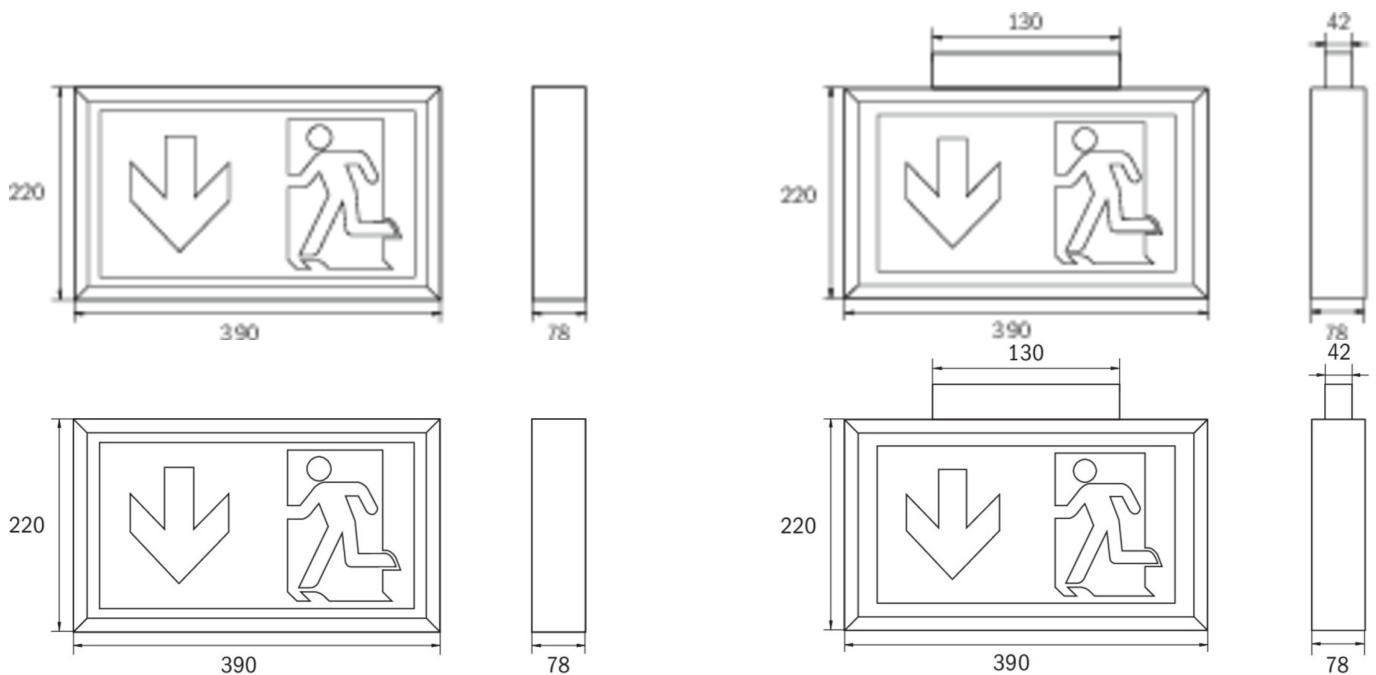



ACCESSORY LIST

DSA -
BALL2 -
2PW-EB -
2DW-EB -

RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
KLU019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central

As of: 22.07.2024 - Subject to technical changes and errors.