



Art.-Nr: KMB411WL-3P Safety luminaire Single Battery Universal, Wireless Professional (WL), 1 h, , IP54, Plastic, white

Compact safety luminaire for universal mounting. The narrow rectangular plastic housing is discreetly reduced to the essentials. Illumination of the escape and emergency routes is assisted by the optics integrated in the surround.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.





More information

www.rp-group.com/en/item/KMB411WL-3P



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP54
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Supply	Single Battery
Monitoring	Wireless Professional (WL)
Bridging time	1 h
Battery	/
Operating mode	Standby circuit / permanent circuit






230 V
50 / 60 Hz
- V
5,3 W
3,9 W
1,5 W
-10 °C - 40 °C
-5 °C - 40 °C
250 mm
34 mm
50 mm
0.5
0.57
2.5 mm²
Yes
No
Connector
No
190 lm
190 lm
94056180
4262483020364

TECHNICAL DRAWING

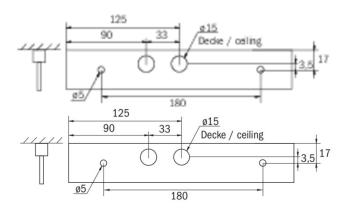







ACCESSORY LIST

KME-EB - Mounting frame

BALL1 - Wire mesh guard

KMBE - Concrete-mounted box

BALLPLX-KMB - Wire mesh surround

KMBFH -

As of: 23.08.2024 - Subject to technical changes and errors.