



Art.-Nr: KMU003SC Exit sign Single Battery Universal, SelfControl (SC), 3 h, 24 m, IP43, Plastic, white

Slim, elegant, convex plastic luminaire angled towards the observer, which tapers downwards in a continuous and symmetrical manner. Suited to inscription on one or two sides. The pictograms are inserted without the use of solvents.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information www.rp-group.com/en/item/KMU003SC



TECHNICAL DATA

CE

Luminaire type	Exit sign				
Mounting	Universal				
Recognition distance	24 m				
Pictograph	Set				
Illuminant	LED				
Housing material	Plastic				
Housing color	white				
Protection type (IP)	IP43				
Impact resistance (IK)	3				
Certification	WEEE, CE				
Insulation class	2				
Supply	Single Battery				
Monitoring	SelfControl (SC)				
Bridging time	3 h				






Battery	NIMH 4,8 V/0,5 Ah
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz
Input voltage DC	- V
Power max.	3,1 W
Power DS	3,1 W
Power BS	1,4 W
Ambient temperature DS	-5 °C to 35 °C
Ambient temperature BS	-5 °C to 35 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.46
Weight incl. packaging	0.56
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Customs tariff number	94056120
EAN	4260123680435





TECHNICAL DRAWING

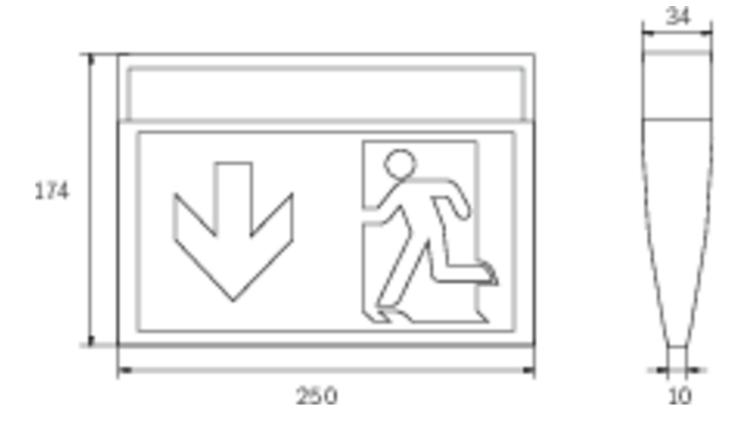

ACCESSORY LIST

DSA - Wire suspension KME-EB - Mounting frame AWKSU - Wall bracket 2PW-EB - Pendant KMBE - Concrete-mounted box BALLPLX-KMU - Wire mesh surround





RELATED PRODUCTS

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
KMU013SC	<u>₹</u> } →	SelfControl (SC)	Single battery	RAL 9003	€	no	high	no	unlimited	itself
KMU013WB	₹ →	Wireless Basic (WB)	Single battery	RAL 9003	€€	yes	low	yes	50	central
KMU013WL	₹ →	Wireless Pro- fessional (WL)	Single battery	RAL 9003	€€	yes	low	yes	1,000 per sys- tem	central
KMU003BC	S >	Bus control		RAL 9003						

As of: 09.01.2025 - Subject to technical changes and errors.