



Art.-Nr: KMU019

**Exit sign Centralised power supply systems
Universal, Without monitoring, CPS, 24 m, IP43, Plastic, white**

Slim, elegant, convex plastic luminaire angled towards the observer, which tapers downwards in a continuous and symmetrical manner. Suited to inscription on one or two sides. The pictograms are inserted without the use of solvents.

Thanks to the snap-in mechanism between the upper and lower part, the luminaire has a harmonious look and appears closed all the way round. The luminaire is connected to the mains in the ceiling section. When closed, the luminaire is powered via contact plugs. This greatly simplifies mounting and makes convenient connection possible despite the small size of the luminaire.

The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information
www.rp-group.com/en/item/KMU019



TECHNICAL DATA


Luminaire type	Exit sign
Mounting	Universal
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP43
Impact resistance (IK)	3
Certification	CNBOP, WEEE, CE, ENEC
Insulation class	2
Supply	Centralised power supply systems
Monitoring	Without monitoring



Bridging time	CPS
Battery	/
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	3,2 W
Power DS	3,2 W
Power BS	1 W
Ambient temperature DS	-30 °C - 40 °C
Ambient temperature BS	-30 °C - 40 °C
Depth	34 mm
Width	250 mm
Height	174 mm
Weight	0.37
Weight incl. packaging	0.47
Connection cross-section	1.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	220 lm
Luminous flux emergency	220 lm
Customs tariff number	94056120
EAN	4260659562007



TECHNICAL DRAWING

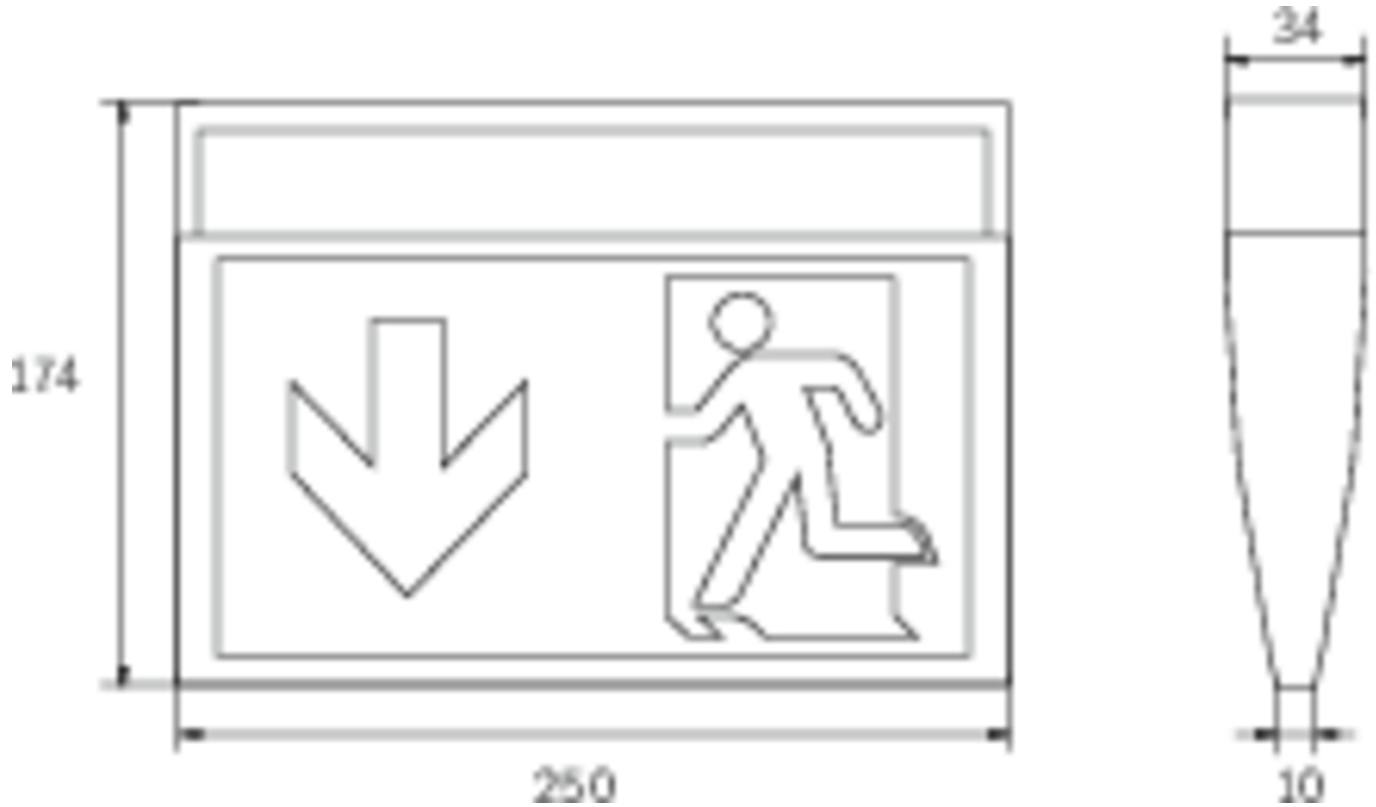

ACCESSORY LIST

- DSA - Wire suspension
- KME-EB - Mounting frame
- AWKSU - Wall bracket
- 2PW-EB - Pendant
- KMBE - Concrete-mounted box
- BALLPLX-KMU - Wire mesh surround

As of: 23.08.2024 - Subject to technical changes and errors.