



**Art.-Nr: KMU413WL-3P**  
**Exit sign Single Battery**  
**Universal, Wireless Professional, 3 h, 24 m, IP43, Plastic,**  
**white**

Slim convex exit sign. The universal mounting includes wall and ceiling surface mounting, as well as the possibility of recessed ceiling installation in conjunction with the mounting frame. Planning safety for marking the escape and rescue routes for one- or two-sided lettering is ensured by the tool-free, variable use of the pictograms on site. The pictograms are inserted solvent-free. The pictogram set (right, left, top and bottom arrow) is included as standard.

Exit sign according to EN 60598-1, EN 605982-22 and EN 1838.



More information



## TECHNICAL DATA


|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | Exit sign                           |
| Mounting               | Universal                           |
| Recognition distance   | 24 m                                |
| Pictograph             | Set                                 |
| Illuminant             | LED                                 |
| Housing material       | Plastic                             |
| Housing color          | white                               |
| Protection type (IP)   | IP43                                |
| Impact resistance (IK) | 3                                   |
| Certification          | WEEE, CE                            |
| Insulation class       | 2                                   |
| Supply                 | Single Battery                      |
| Monitoring             | Wireless Professional               |
| Bridging time          | 3 h                                 |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltage AC       | 230 V                               |
| Input frequency        | 50 / 60 Hz                          |
| Input voltage DC       | - V                                 |
| Power max.             | 5,3 W                               |
| Power DS               | 3,9 W                               |



|                          |                     |
|--------------------------|---------------------|
| Power BS                 | 1,5 W               |
| Ambient temperature DS   | -5 °C - 35 °C       |
| Ambient temperature BS   | -5 °C - 35 °C       |
| Depth                    | 34 mm               |
| Width                    | 250 mm              |
| Height                   | 174 mm              |
| Weight                   | 0.37                |
| Weight incl. packaging   | 0.47                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | Yes                 |
| Emergency light blocking | No                  |
| Battery connection       | Connector           |
| Dimming function         | No                  |
| Luminous flux mains      | 190 lm              |
| Luminous flux emergency  | 190 lm              |
| Customs tariff number    | 94056120            |
| EAN                      | 4262483020227       |



## TECHNICAL DRAWING

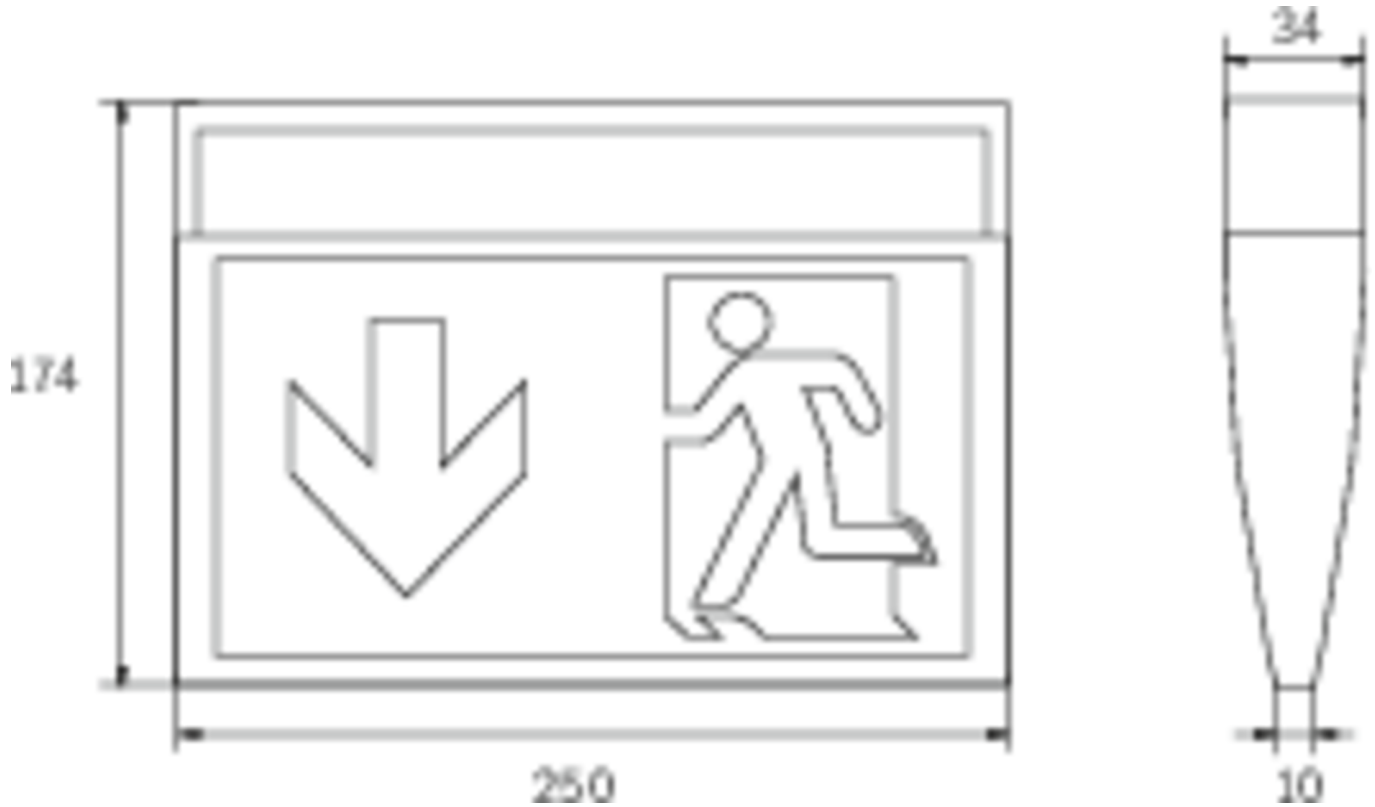

## ACCESSORY LIST

- DSA -
- KME-EB -
- AWKSU -
- 2PW-EB -
- KMBE -
- BALLPLX-KMU -

As of: 16.07.2024 - Subject to technical changes and errors.