



Art.-Nr: KWIW413SC-COOLIP54
Exit sign, Safety luminaire
Wall mounting, SelfControl (SC), 3 h, 16 m, IP65, Plastic,
white



Classic, robust, plastic, beam-like emergency exit sign luminaire with a high level of protection and self-adhesive pictogram for versatile use.

Intended for wall mounting when used as an emergency exit sign luminaire. Without the use of pictograms, it can be used as a safety luminaire, preferably for ceiling mounting.

Automatic monitoring of safety luminaire with SelfControl. Planning certainty is provided by tool-free, variable use of the pictograms on site. A set of pictograms corresponding to DIN ISO 7010 (arrow to the right, left, up and down) is supplied as standard.



More information

www.rp-group.com/en/item/KWIW413SC-COOLIP54




TECHNICAL DATA

Luminaire type	Exit sign, Safety luminaire
Mounting	Wall mounting
Recognition distance	16 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, 5 earys warranty
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	LiFePO4 6,4 V/1,6 Ah
Power max.	4,2 W
Power DS	3,3 W
Power BS	0,4 W



Ambient temperature DS	-25 °C to 35 °C
Ambient temperature BS	-25 °C to 35 °C
Depth	86 mm
Width	390 mm
Height	99 mm
Weight	0.7
Weight incl. packaging	0.8
Luminous flux mains	190 lm
Luminous flux emergency	190 lm
Customs tariff number	94056120
EAN	4262483025499

TECHNICAL DRAWING

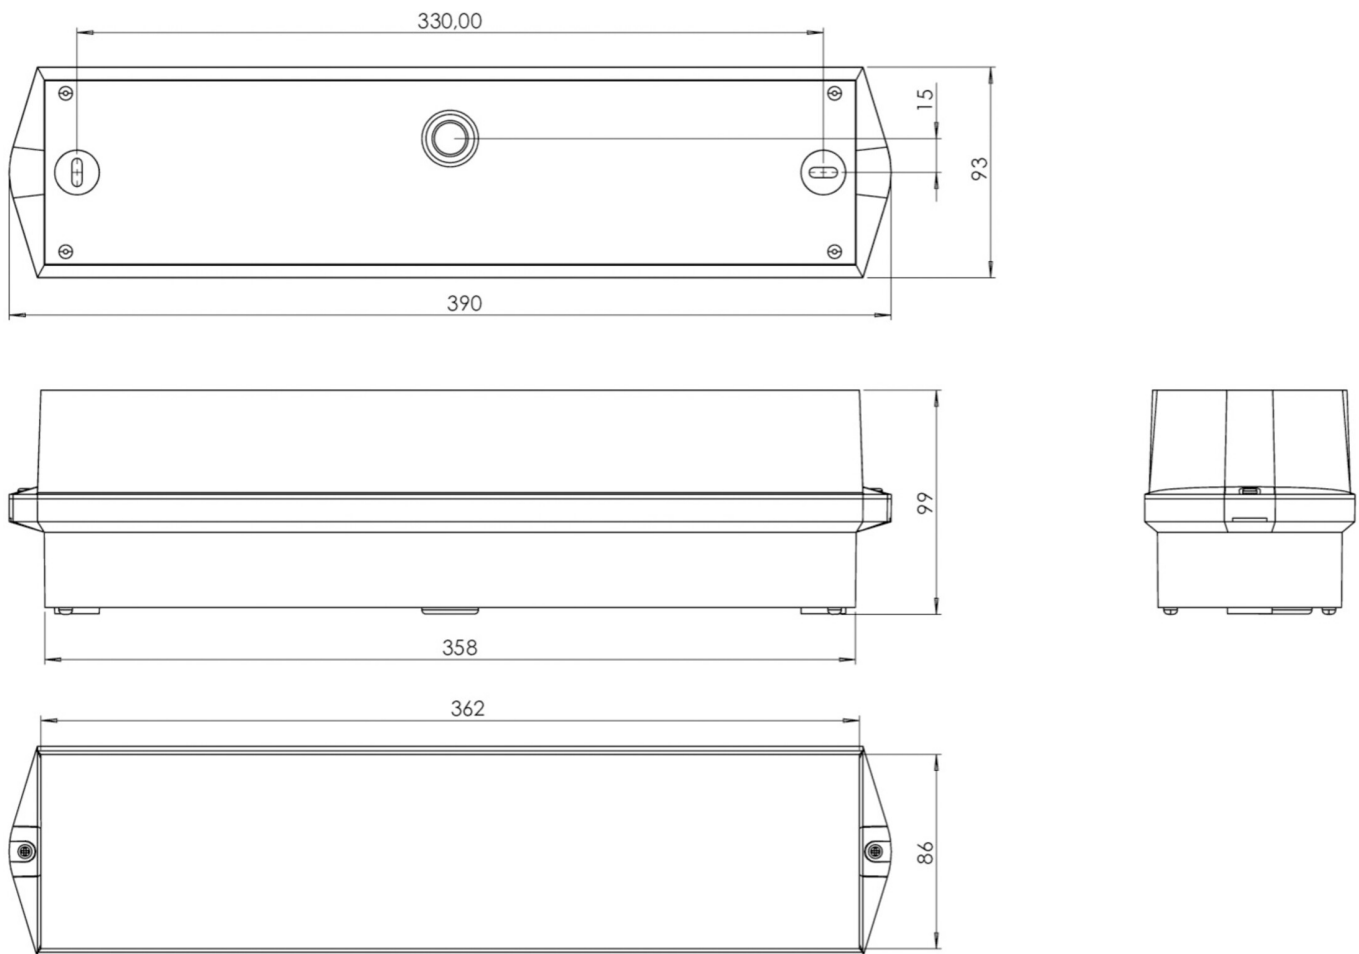



ACCESSORY LIST

BKW -

As of: 18.12.2024 - Subject to technical changes and errors.