

Art.-Nr: KWIW428SC-TT Safety luminaire Supply Universal, SelfControl (SC), 8 h, , IP65, Plastic, white

Classic, robust, plastic, beam-like safety luminaire with a high level of protection and for versatile use.

Automatic monitoring of safety luminaire with <u>SelfControl</u>. The luminaire is fitted with the innovative <u>flexible plug-in</u> <u>system</u> for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.





More information

www.rp-group.com/en/item/ KWIW428SC-TT



Technical Data

Luminaire type Safety luminaire

Mounting Universal

Pictograph No
Illuminant LED
Housing material Plastic
Housing color white
Protection type (IP) IP65
Impact resistance (IK) 6

Certification CE, WEEE, D-Sign

Insulation class 2

Monitoring SelfControl (SC)


Bridging time 8 h
Battery /
Power max. 5,3 W
Power DS 3,9 W
Power BS 2 W

Ambient temperature DS -15 °C - 40 °C Ambient temperature BS -15 °C - 40 °C

Depth 86 mm
Width 390 mm
Height 99 mm
Weight 0.7
Weight incl. packaging 0.8
Luminous flux mains 210 lm
Luminous flux emergency 210 lm

EAN 4262483022887

Technical drawing

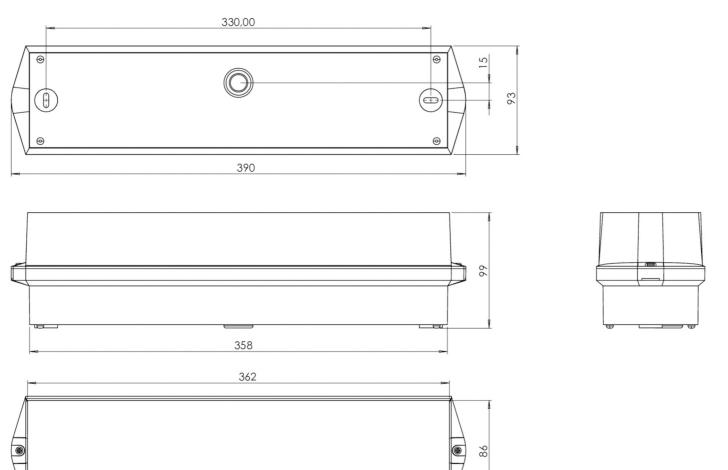

Accessory List

BKW -

As of: 06.11.2024 - Subject to technical changes and errors.