



**Art.-Nr: KXU428SC**  
**Exit sign, Safety luminaire Supply**  
**Universal, SelfControl (SC), 8 h, 30 m, IP40, Plastic, white**

Innovative plastic safety and emergency exit sign luminaire for universal mounting. With conically tapering housing and clear surround for an appealing look. Suited to inscription on one or two sides.

Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options. Universal mounting includes fitting on the wall and ceiling as well as the option of fitting in the ceiling in conjunction with the mounting frame available.



More information  
[www.rp-group.com/en/item/KXU428SC](http://www.rp-group.com/en/item/KXU428SC)



## TECHNICAL DATA


Luminaire type	Exit sign, Safety luminaire
Mounting	Universal
Recognition distance	30 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/3,3 Ah



Power max.	5,3 W
Power DS	3,9 W
Power BS	2 W
Ambient temperature DS	-5 °C - 35 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	48 mm
Width	332 mm
Height	242 mm
Weight	1.04
Weight incl. packaging	1.15
Luminous flux mains	210 lm
Luminous flux emergency	210 lm
Customs tariff number	94056120
EAN	4262483022900



## TECHNICAL DRAWING

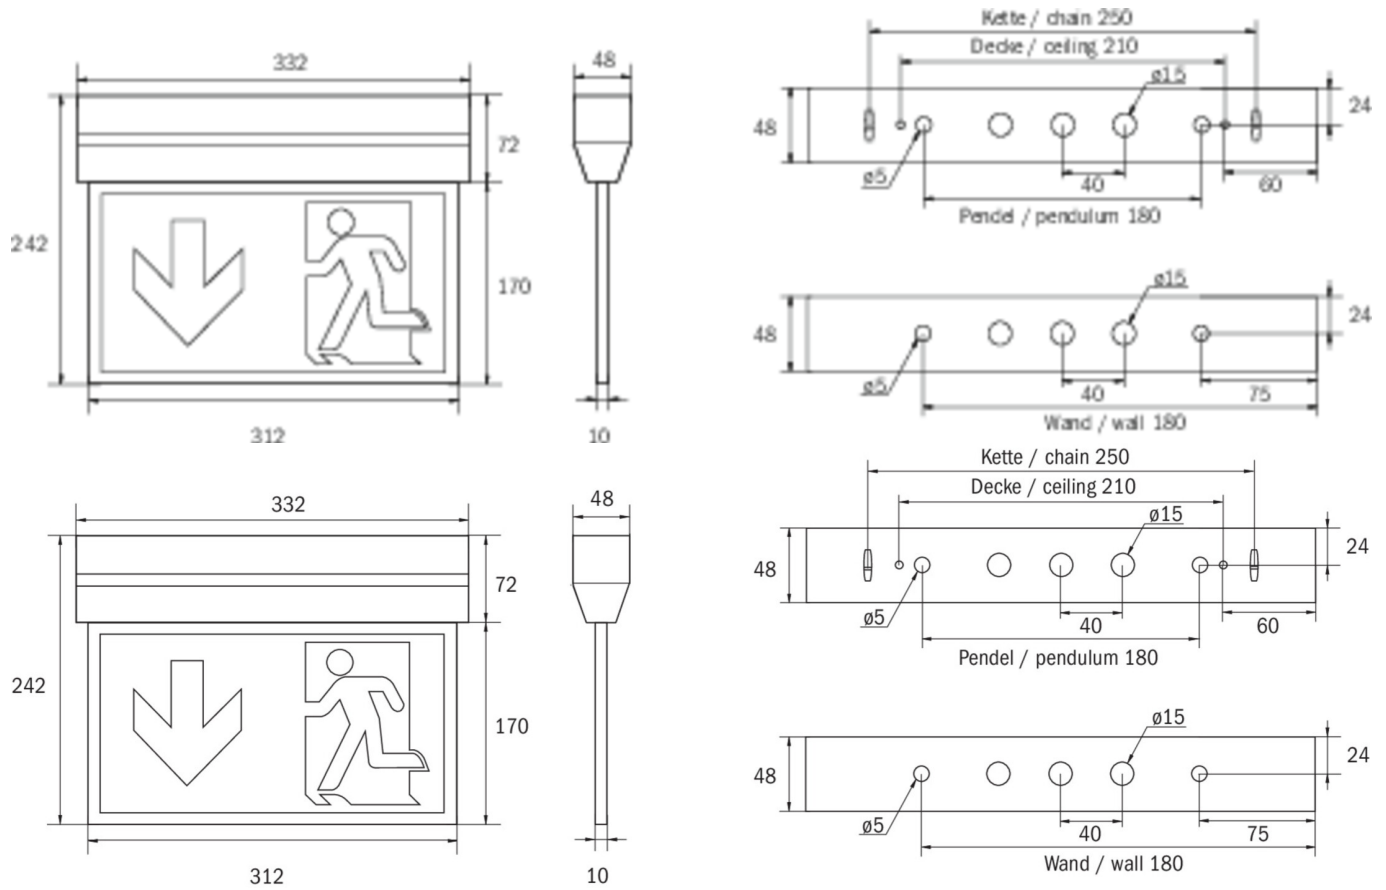

## ACCESSORY LIST

- KXE-EB -
- AWX001 -
- DSA - Wire suspension
- 2PW-EB - Pendant
- 2DW-EB -
- KXBE -

As of: 12.11.2024 - Subject to technical changes and errors.