



Art.-Nr: LSD413SC

Exit sign

Ceiling, SelfControl, 3 h, 56 m, IP40, Aluminium, Anodised aluminium

Emergency luminaire in a sleek Aluminium profile, matt anodized for ceiling mounting with an additional light source to light the Floor below the luminaire. Housing is openable toollessly. Applicable for maintained or non-maintained operation. The toolless Change and variable use of these pictograms provide planning security on site. Pluggable set of pictograms (left, right, down, up) is included in the scope of delivery. Emergency luminaire according to DIN EN 60598-1, DIN EN 60598-2-22 und DIN EN 1838.



More information



TECHNICAL DATA



Luminaire type	Exit sign
Mounting	Ceiling
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Monitoring	SelfControl
Bridging time	3 h
Battery	LFP3212.K-SET-2AKKU
Power max.	4,2 W
Power DS	3,2 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	62 mm



Width	614 mm
Height	334 mm
Weight	2.27
Weight incl. packaging	2.27
Customs tariff number	94056180
EAN	4260766556463



TECHNICAL DRAWING

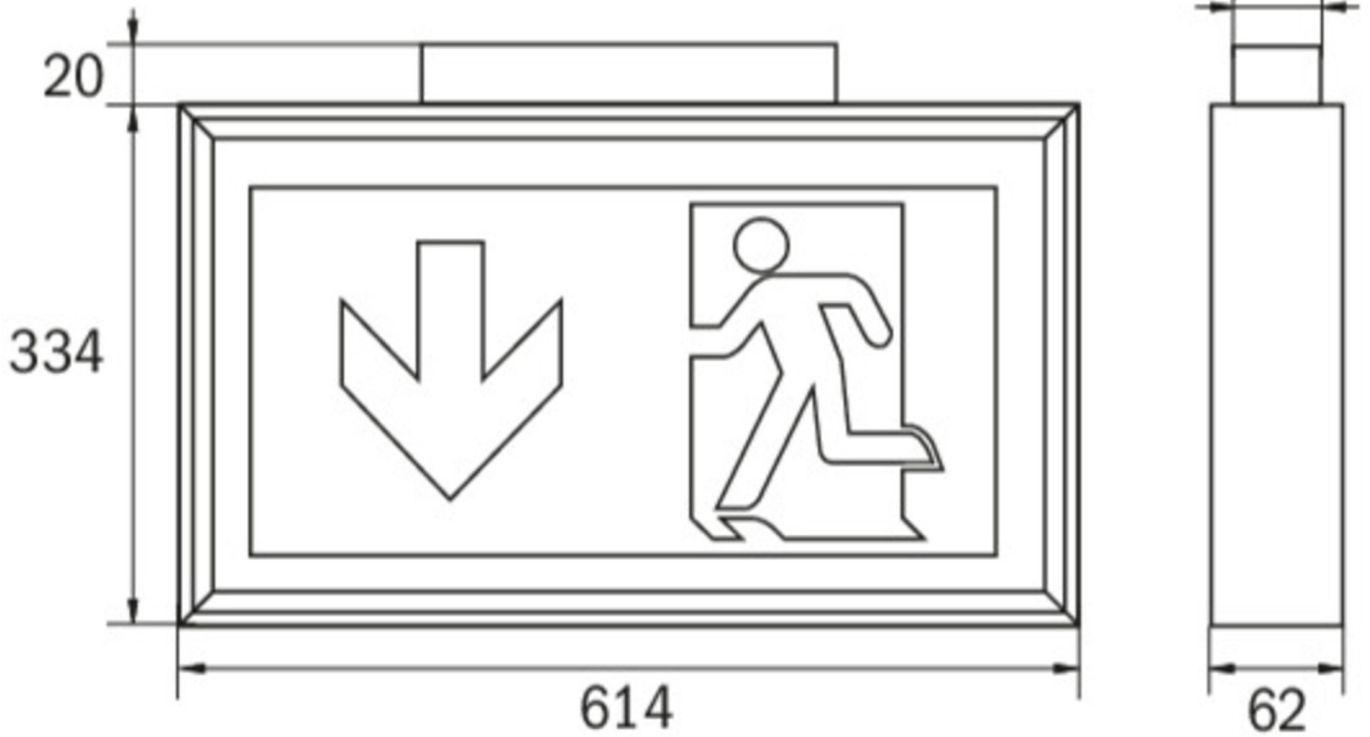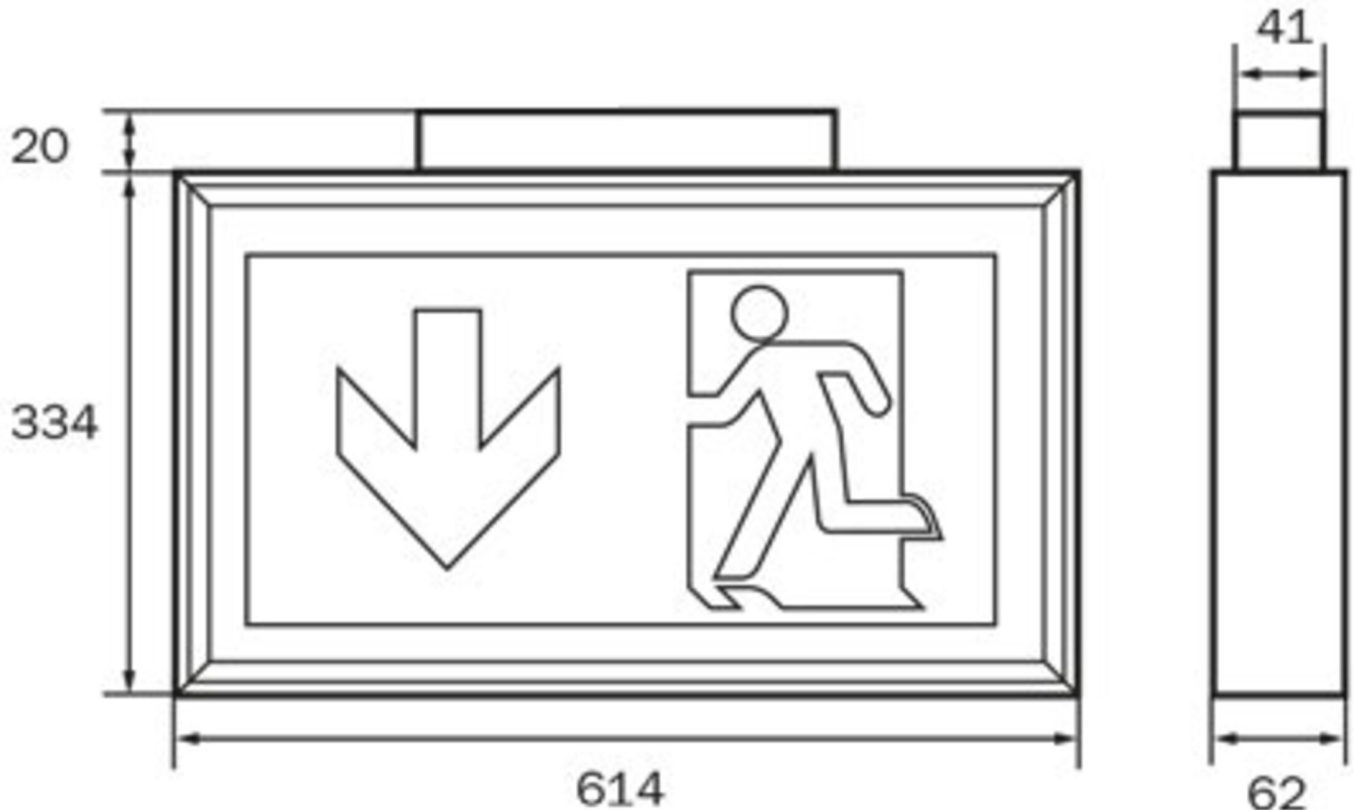



ACCESSORY LIST

DSA -

2PS-EB -

As of: 24.07.2024 - Subject to technical changes and errors.