



**Art.-Nr: LSD418SC**

**Exit sign**

**Recessed mounting, SelfControl (SC), 8 h, 56 m, IP40,  
Aluminium, Anodised aluminium**

Robust emergency exit sign luminaire made from slim aluminium profile, for ceiling mounting. Suited to inscription on one or two sides.

The additional downward light emission helps to illuminate emergency and escape routes.

Automatic monitoring of safety luminaire with SelfControl. Two requested pictograms (arrow to the right, left, up, down or white) are supplied as standard.



More information

[www.rp-group.com/en/item/LSD418SC](http://www.rp-group.com/en/item/LSD418SC)



## TECHNICAL DATA



Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	56 m
Pictograph	acc. to Specification
Illuminant	LED
Housing material	Aluminium
Housing color	Anodised aluminium
Protection type (IP)	IP40
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Monitoring	SelfControl (SC)
Bridging time	8 h
Battery	LiFePO4 6,4 V/1,2 Ah
Power max.	2,6 W
Power DS	1,7 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C



Depth	62 mm
Width	614 mm
Height	334 mm
Weight	2.27
Weight incl. packaging	2.27
Customs tariff number	94056180
EAN	4262483022931



TECHNICAL DRAWING

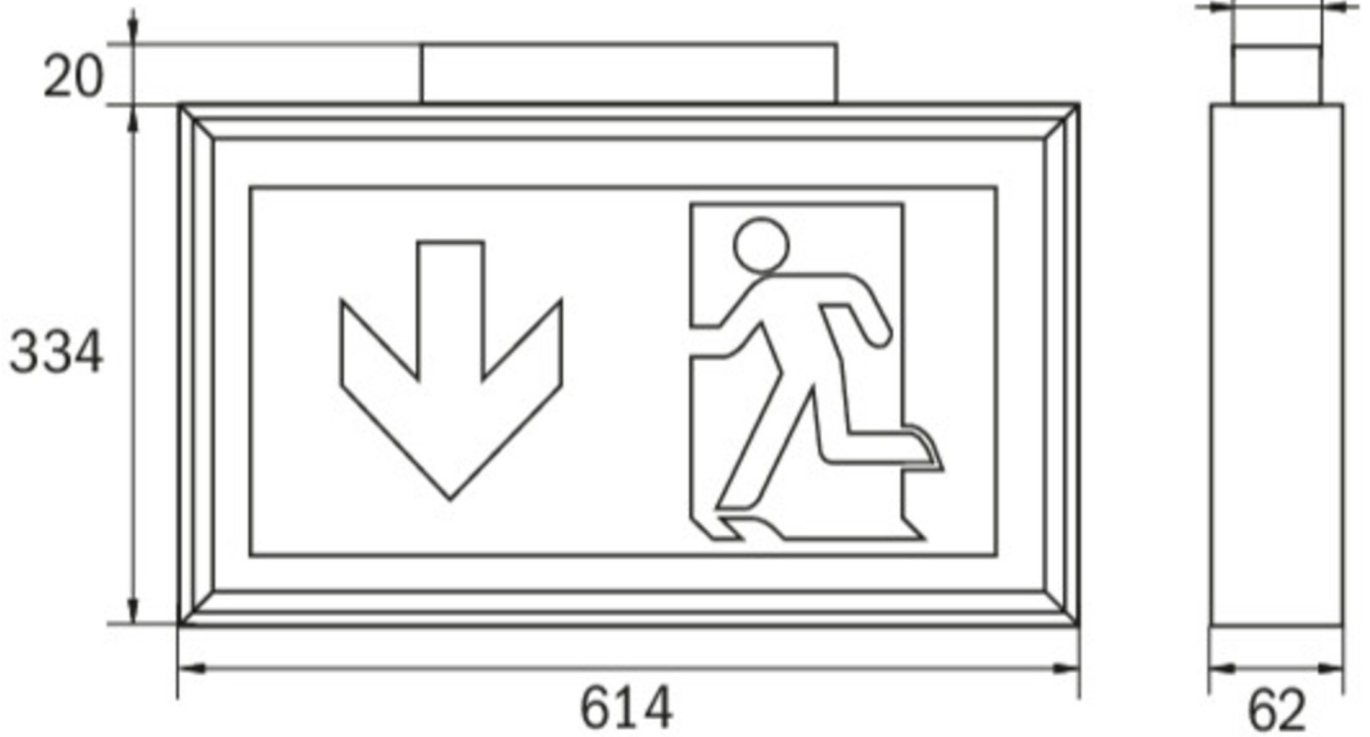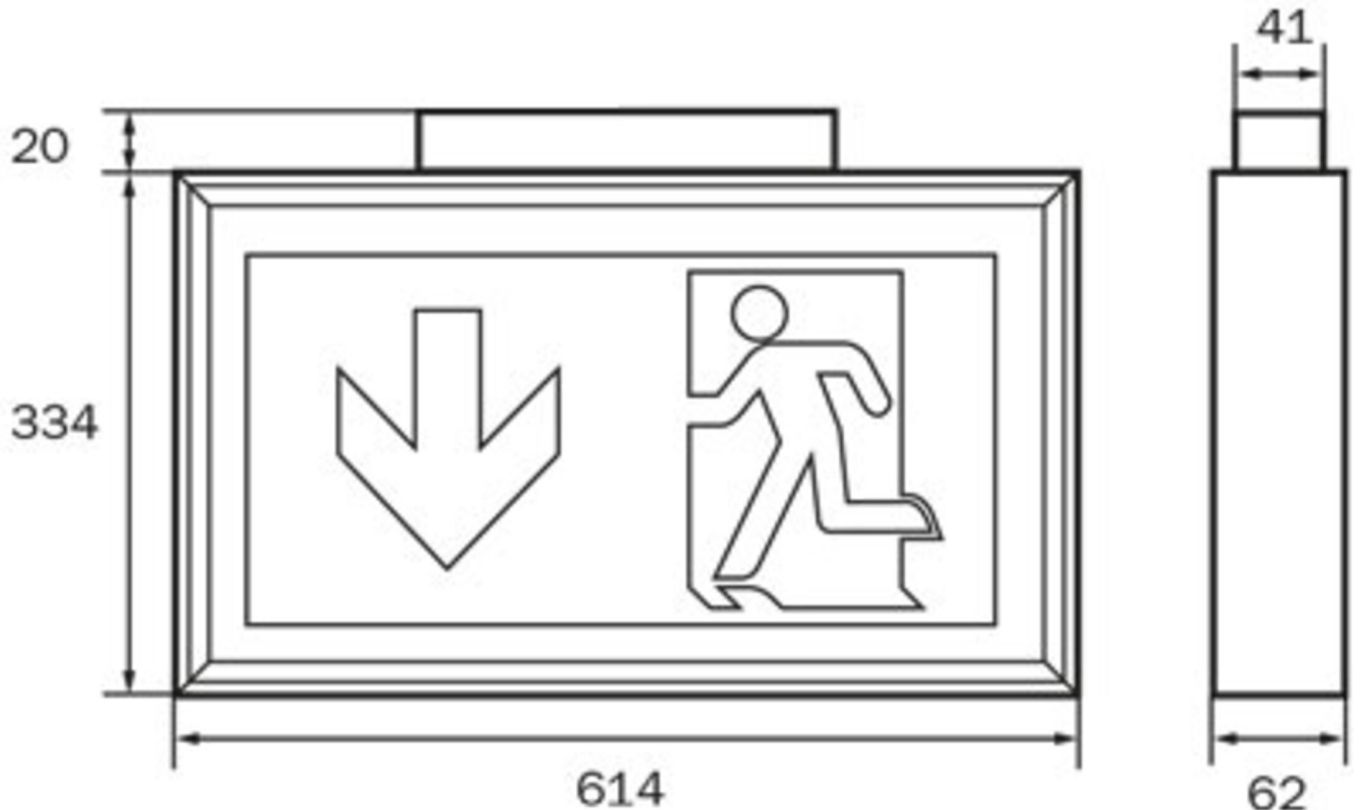



## ACCESSORY LIST

DSA - Wire suspension

2PS-EB - Pendant

As of: 12.11.2024 - Subject to technical changes and errors.