



Art.-Nr: LSYS-B4

The beam lens is used for additional illumination of wall-mounted fire-fighting, reporting and first-aid equipment as well as escape and rescue plans with the normatively required luminous intensity of 5lx.

For optimal light distribution, it can be quickly installed directly at the installation site in the respective luminaire, depending on the application. This makes assembly easier and increases flexibility during installation.




Mer informasjon

TEKNISKE DATA

dybde	5 mm
Bredde	60 mm
Høyde	100 mm
Vekt	0.01 kg
Tolltariffnummer	94059200
Opprinnelsesland	CHINA
EAN	4260682159212

TEKNISK TEGNING

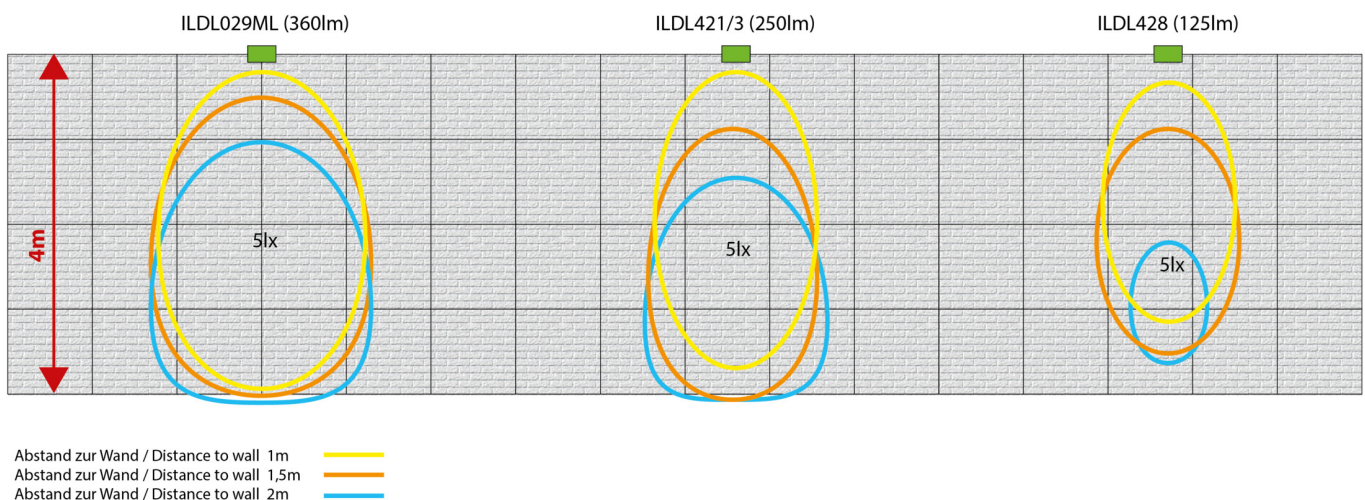

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.