



Art.-Nr: LXW413SC Exit sign Wall, SelfControl (SC), 3 h, 34 m, IP40, Aluminium, Anodised aluminium

Robust emergency exit sign luminaire made from slim aluminium profile, for wall mounting.

The additional downward light emission helps to illuminate emergency and escape routes.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.





More information www.rp-group.com/en/item/LXW413SC



TECHNICAL DATA

| Luminaire type | Exit sign |
|------------------------|--------------------|
| Mounting | Wall |
| Recognition distance | 34 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Aluminium |
| Housing color | Anodised aluminium |
| Protection type (IP) | IP40 |
| Impact resistance (IK) | 3 |
| Certification | WEEE, CE |
| Insulation class | 1 |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | 6,4 V 1,6Ah Ah/ |
| Power max. | 4,1 W |
| Power DS | 3,3 W |






| Power BS | 0,4 W |
|-------------------------|---------------|
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 62 mm |
| Width | 384 mm |
| Height | 214 mm |
| Weight | 1.49 |
| Weight incl. packaging | 1.69 |
| Luminous flux mains | 225 lm |
| Luminous flux emergency | 225 lm |
| Customs tariff number | 94056180 |
| EAN | 4260766556524 |





TECHNICAL DRAWING

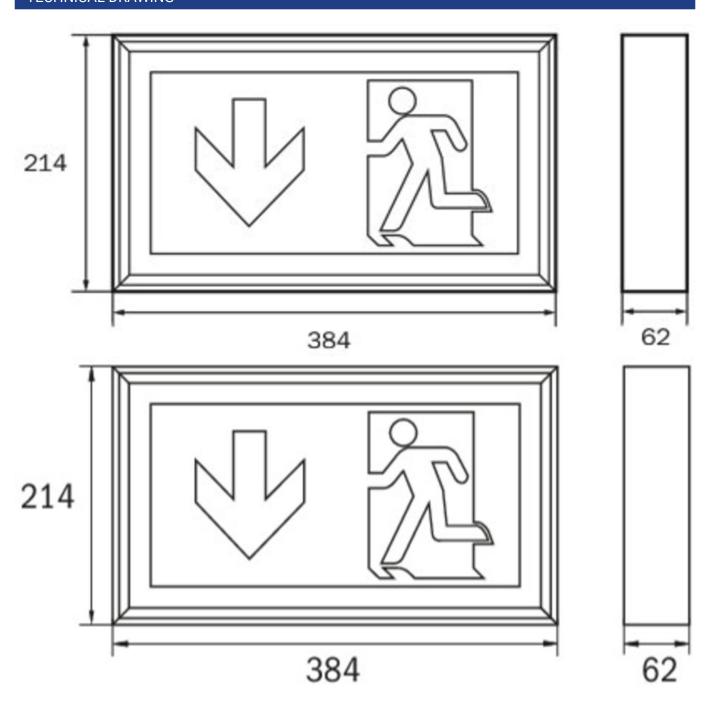

ACCESSORY LIST

BALL2 - Wire mesh guard

As of: 23.08.2024 - Subject to technical changes and errors.