



**Art.-Nr: PFD029ML**  
**Exit sign Centralised power supply systems**  
**Ceiling, ML, CPS, 24 m, IP65, Plastic, white**

Plastic luminaire for the marking and lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. For single or double sided labeling. Available for central power systems or as self-contained emergency luminaire.



More information



## TECHNICAL DATA





Luminaire type	Exit sign
Mounting	Ceiling
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, CNBOP, ENEC, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	ML
Bridging time	CPS
Operating mode	single luminaire switching
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Input voltage DC	216 V
Power max.	5,2 W
Power DS	5,2 W
Power BS	1,1 W
Ambient temperature DS	-20 °C - 40 °C
Ambient temperature BS	-20 °C - 40 °C



Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.95
Weight incl. packaging	1.08
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	520 lm
Luminous flux emergency	520 lm
Customs tariff number	94056120
EAN	4260659563158



## TECHNICAL DRAWING

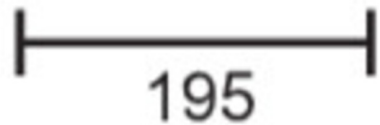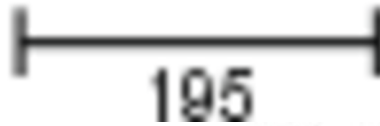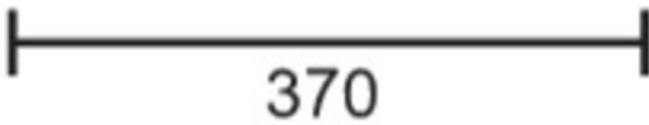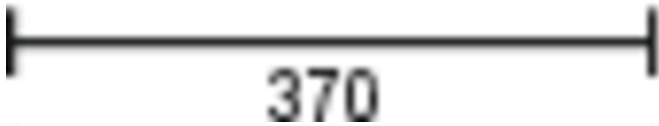


## ACCESSORY LIST

- 2PW-EB -
- 2DW-EB -
- DSA -
- PFER -



## RELATED PRODUCTS

Art.-No.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote maintenance	max. luminaires	Single luminaire monitoring
PFD019ML		ML	Central power supply		€€€	Yes	low	Yes	1,920 per system	central
PFD519CC		CoreCompact 24	Central power supply		€€	Yes	low	Yes		central

As of: 17.07.2024 - Subject to technical changes and errors.