



Art.-Nr: PFD413SC Exit sign Ceiling, SelfControl (SC), 3 h, 24 m, IP65, Plastic, white

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Automatic monitoring of safety luminaire with SelfControl. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information www.rp-group.com/en/item/PFD413SC



TECHNICAL DATA

CE 🕅


| Luminaire type | Exit sign |
|------------------------|------------------|
| Mounting | Ceiling |
| Recognition distance | 24 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 1 |
| Monitoring | SelfControl (SC) |
| Bridging time | 3 h |
| Battery | 6,4 V 1,6Ah Ah/ |
| Power max. | 4,1 W |
| Power DS | 3,3 W |
| Power BS | 0,4 W |
| Ambient temperature DS | -5 °C - 40 °C |





| Ambient temperature BS | -5 °C - 40 °C |
|-------------------------|---------------|
| Depth | 152 mm |
| Width | 370 mm |
| Height | 195 mm |
| Weight | 0.95 |
| Weight incl. packaging | 1.08 |
| Luminous flux mains | 225 lm |
| Luminous flux emergency | 225 lm |
| Customs tariff number | 94056120 |
| EAN | 4260766553639 |

TECHNICAL DRAWING

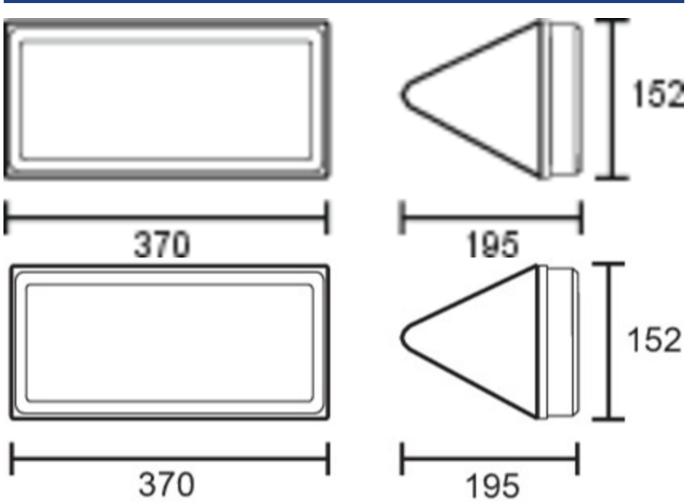





ACCESSORY LIST

2PW-EB - Pendant 2DW-EB -DSA - Wire suspension PFER -

As of: 23.08.2024 - Subject to technical changes and errors.