



Art.-Nr: PFD529CC
Exit sign Centralised power supply systems
Recessed mounting, CoreCompact 24 (CC), CPS, 24 m, IP65,
Plastic, white

Trapezoid, plastic emergency exit sign luminaire for fitting on the ceiling for inscription on one or two sides with self-adhesive pictogram.

Control and monitoring via central 24 V low-power system. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options.



More information

www.rp-group.com/en/item/PFD529CC



TECHNICAL DATA





Luminaire type	Exit sign
Mounting	Recessed mounting
Recognition distance	24 m
Pictograph	Set
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Centralised power supply systems
Monitoring	CoreCompact 24 (CC)
Bridging time	CPS
Battery	/
Operating mode	Standby circuit / permanent circuit
Input voltageAC	24 V
Power max.	5,1 W



Power DS	5,1 W
Power BS	0,4 W
Ambient temperature DS	-20 °C - 40 °C
Ambient temperature BS	-20 °C - 40 °C
Depth	152 mm
Width	370 mm
Height	195 mm
Weight	0.85
Weight incl. packaging	0.98
Connection cross-section	2.5 mm ²
Switching input	No
Emergency light blocking	No
Battery connection	No
Customs tariff number	94056120
EAN	4260682157515



TECHNICAL DRAWING

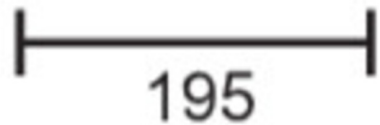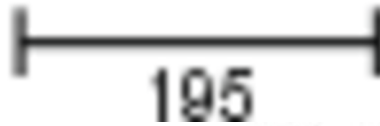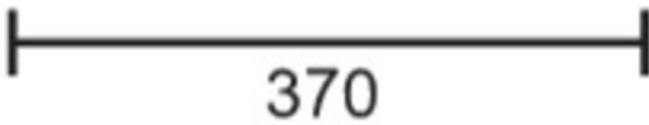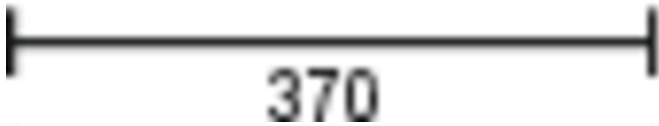

ACCESSORY LIST

- 2PW-EB - Pendant
- 2DW-EB -
- DSA - Wire suspension
- PFER -

As of: 31.10.2024 - Subject to technical changes and errors.