



Art.-Nr: PFW411SC-TT
Safety luminaire
Wall, SelfControl, , 24 m, IP65, Plastic, white

Plastic luminaire for the marking and lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. For single or double sided labeling. Available for central power systems or as self-contained emergency luminaire.



More information




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Wall
Recognition distance	24 m
Pictograph	Set
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	WEEE, CE, D-Sign
Insulation class	1
Monitoring	SelfControl
Ambient temperature DS	-15 °C - 40 °C
Ambient temperature BS	-15 °C - 40 °C
Depth	370 mm
Width	105 mm
Height	152 mm
Weight	0.87
Weight incl. packaging	1
EAN	4260766558139



TECHNICAL DRAWING

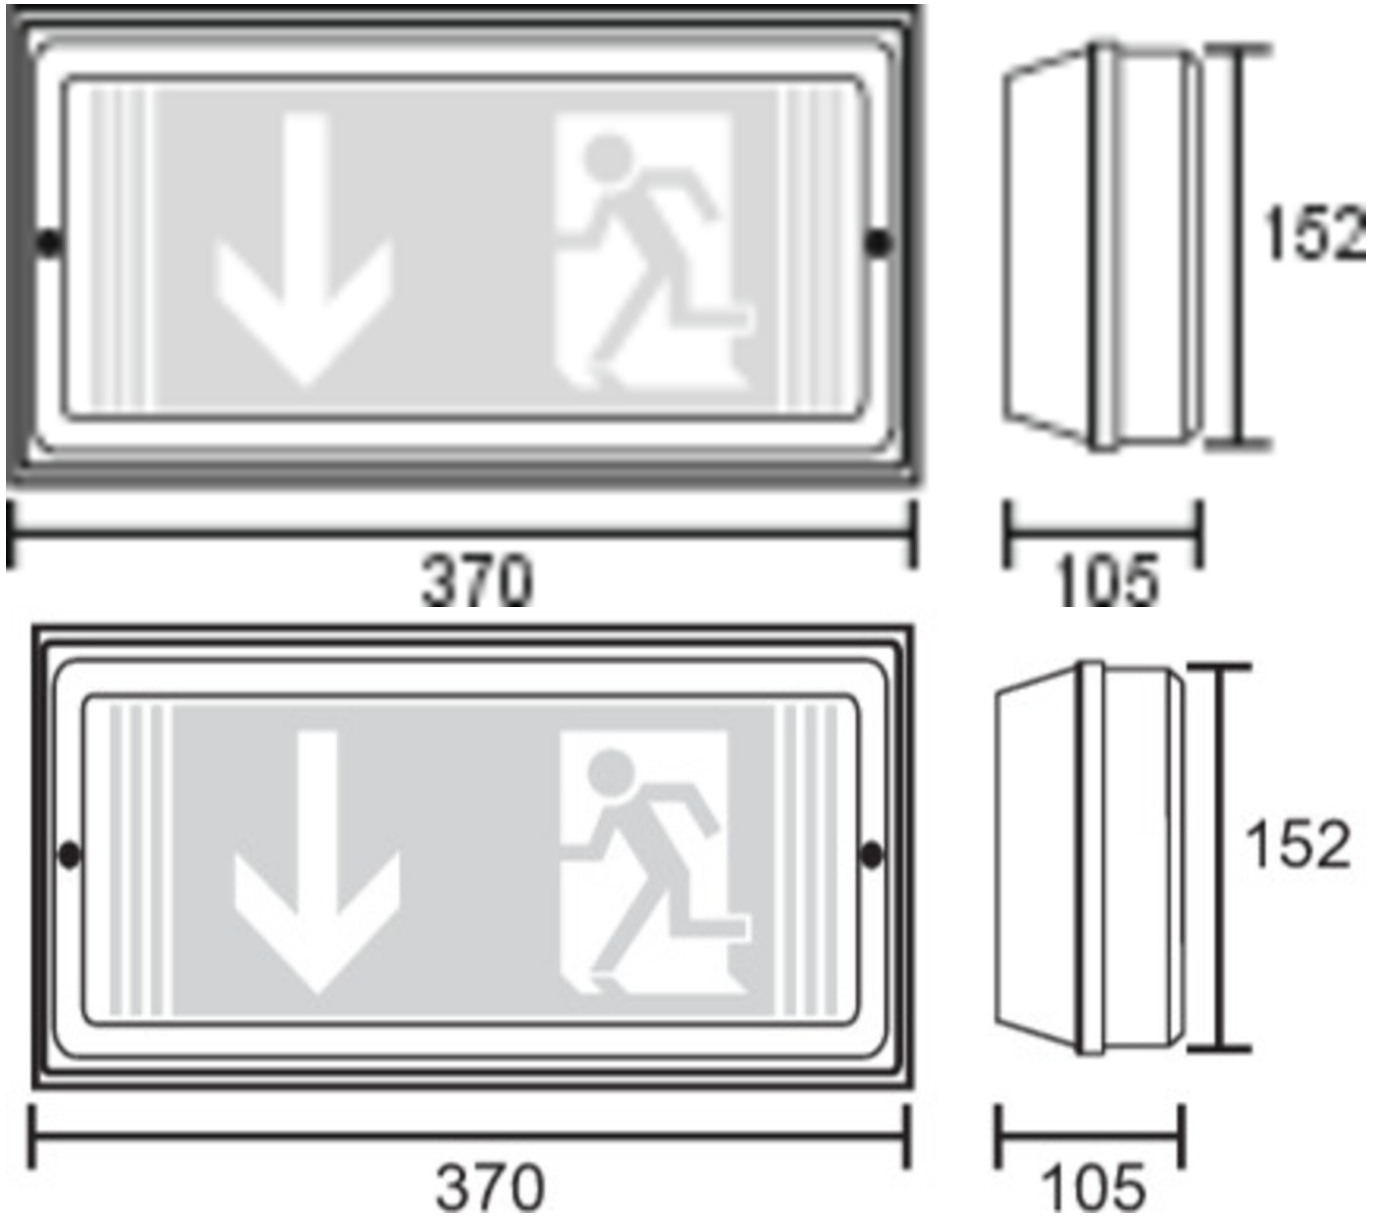

ACCESSORY LIST

BALL2 -

As of: 18.07.2024 - Subject to technical changes and errors.