



**Art.-Nr: PFW413WL-P-TT**  
**Safety luminaire Single Battery**  
**Wall, Wireless Professional (WL), 3 h, 24 m, IP65, Plastic,**  
**white**

Robust plastic emergency exit sign or safety luminaire.

Use as an emergency exit sign luminaire for wall mounting.

Or without the use of pictograms as a safety luminaire with the prismatic cover included, preferably for ceiling mounting.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The innovative integrated lens holder with a rapid fitting fixture permits the flexible use of various lens types. Using the right lens allows the distribution of light to be matched perfectly to the application and simplifies illumination which satisfies all relevant standards. A round lens and hall lens are supplied with every luminaire, allowing it to be adapted perfectly to the respective mounting situation. Other lenses, such as a spotlight lens, beam lens or H lens, are available as options. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.



More information

[www.rp-group.com/en/item/PFW413WL-P-TT](http://www.rp-group.com/en/item/PFW413WL-P-TT)



## TECHNICAL DATA


|                        |                            |
|------------------------|----------------------------|
| Luminaire type         | Safety luminaire           |
| Mounting               | Wall                       |
| Recognition distance   | 24 m                       |
| Pictograph             | Set                        |
| Illuminant             | LED                        |
| Housing material       | Plastic                    |
| Housing color          | white                      |
| Protection type (IP)   | IP65                       |
| Impact resistance (IK) | 5                          |
| Certification          | WEEE, CE, D-Sign           |
| Insulation class       | 1                          |
| Supply                 | Single Battery             |
| Monitoring             | Wireless Professional (WL) |



|                          |                                     |
|--------------------------|-------------------------------------|
| Bridging time            | 3 h                                 |
| Battery                  | /                                   |
| Operating mode           | Standby circuit / permanent circuit |
| Input voltageAC          | 230 V                               |
| Input frequency          | 50 Hz                               |
| Power max.               | 5,5 W                               |
| Power DS                 | 3,6 W                               |
| Power BS                 | 0,7 W                               |
| Ambient temperature DS   | -15 °C - 40 °C                      |
| Ambient temperature BS   | -15 °C - 40 °C                      |
| Depth                    | 370 mm                              |
| Width                    | 105 mm                              |
| Height                   | 152 mm                              |
| Weight                   | 0.94                                |
| Weight incl. packaging   | 1.07                                |
| Connection cross-section | 2.5 mm <sup>2</sup>                 |
| Switching input          | Yes                                 |
| Emergency light blocking | Yes                                 |
| Battery connection       | Connector                           |
| Dimming function         | Yes                                 |
| EAN                      | 4260766559501                       |



TECHNICAL DRAWING

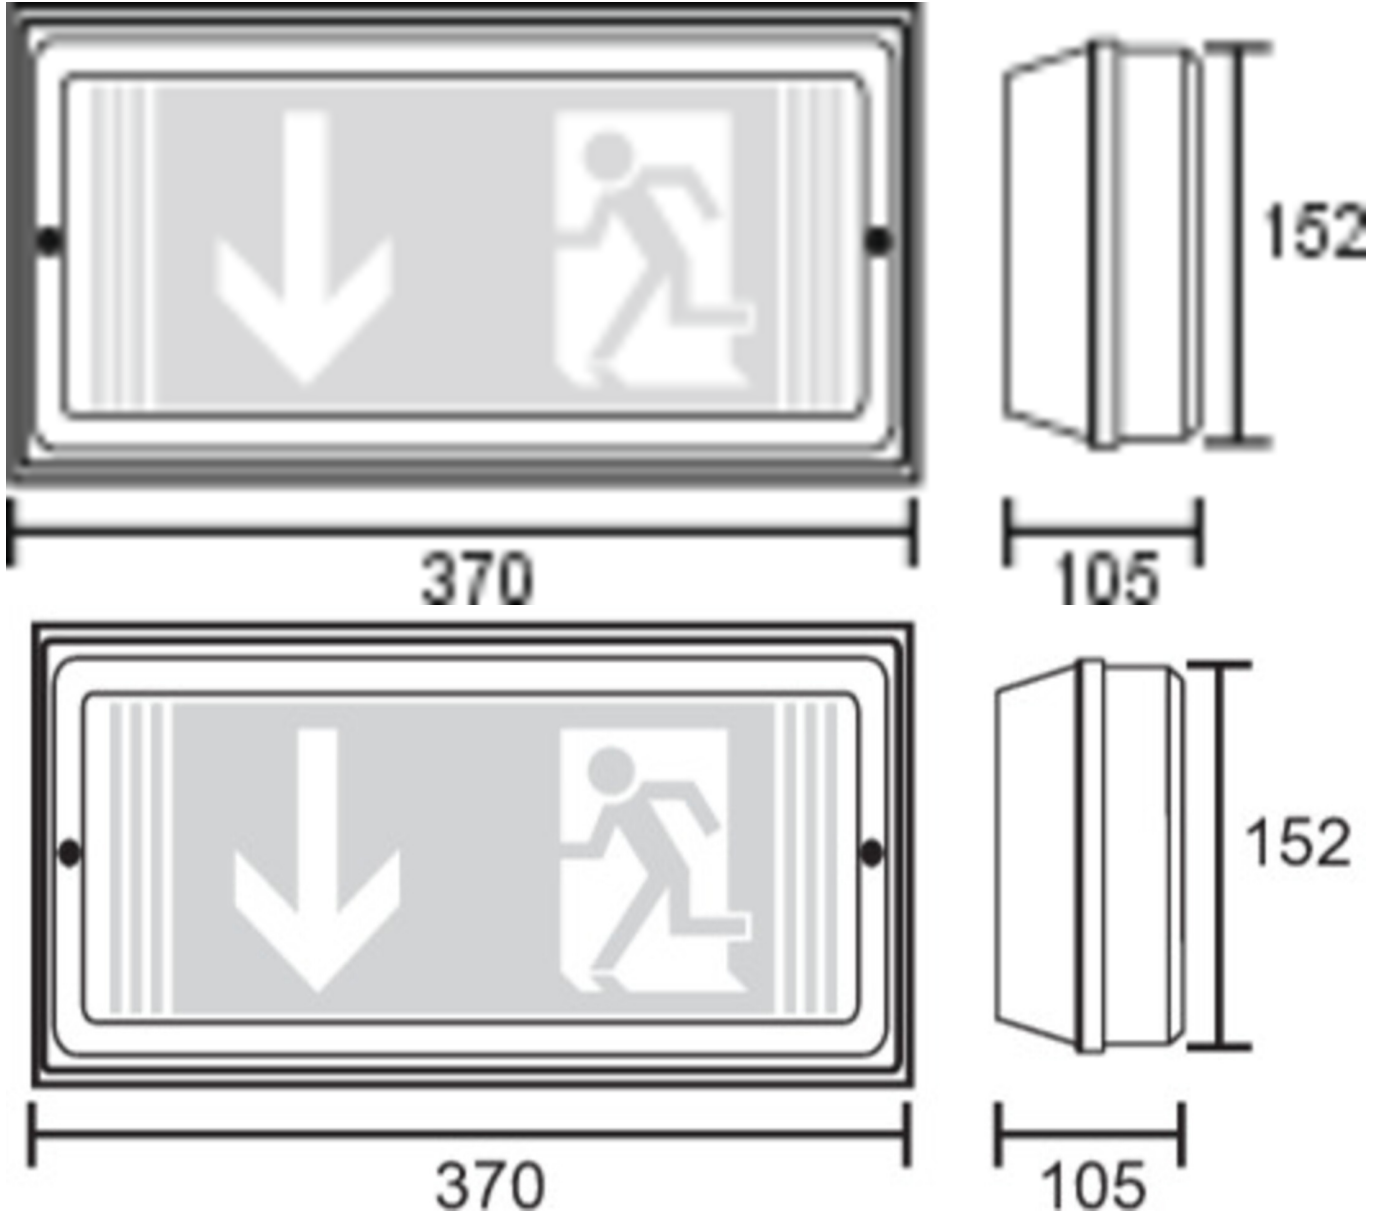

ACCESSORY LIST

BALL2 - Wire mesh guard

As of: 23.08.2024 - Subject to technical changes and errors.