



Art.-Nr: PFW418WL-TT
Safety luminaire Single Battery
Wall, Wireless Professional, 8 h, 24 m, IP65, Plastic, white

Plastic luminaire for the marking and lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. For single or double sided labeling. Available for central power systems or as self-contained emergency luminaire.



More information



TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Wall
Recognition distance	24 m
Pictograph	Set
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	5
Certification	WEEE, CE, D-Sign
Insulation class	1
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	8 h
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 Hz
Power max.	5,5 W
Power DS	3,6 W
Power BS	0,7 W
Ambient temperature DS	-15 °C - 40 °C
Ambient temperature BS	-15 °C - 40 °C
Depth	370 mm



Width	105 mm
Height	152 mm
Weight	0.94
Weight incl. packaging	1.07
Connection cross-section	2.5 mm ²
Switching input	Yes
Emergency light blocking	Yes
Battery connection	Connector
Dimming function	Yes
EAN	4260766559112



TECHNICAL DRAWING

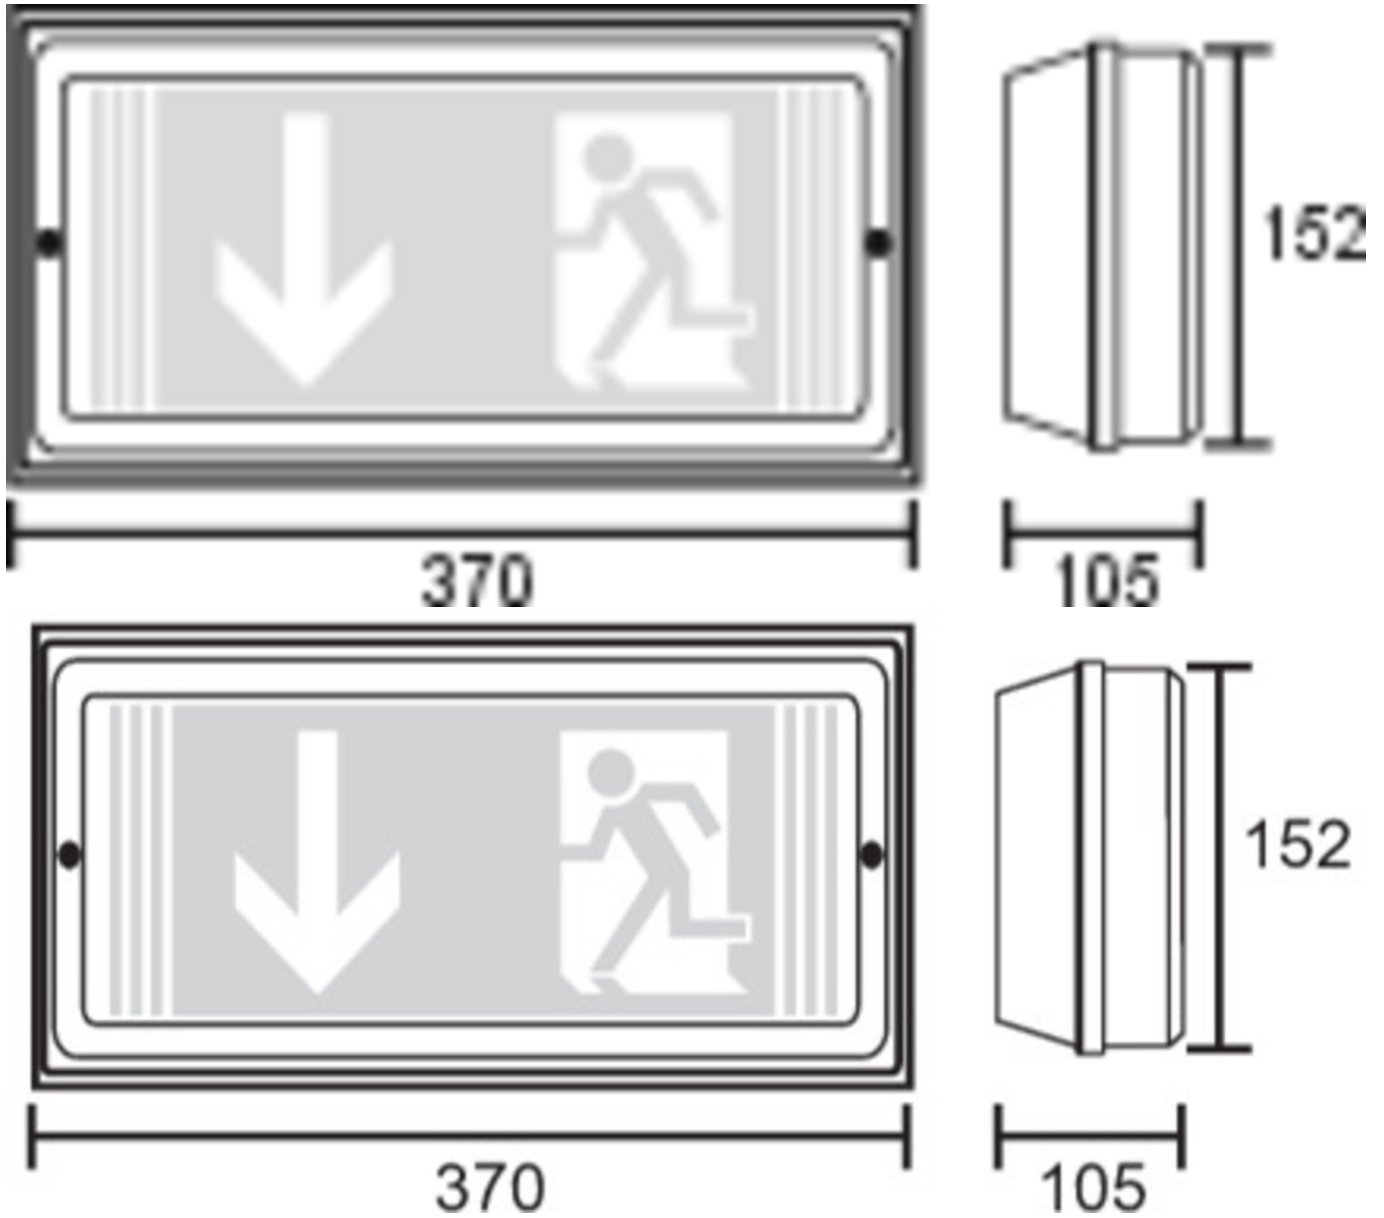

ACCESSORY LIST

BALL2 -

As of: 17.07.2024 - Subject to technical changes and errors.