



Art.-Nr: PMW408WL
Exit sign Single Battery
Wall, Wireless Professional (WL), 8 h, 20 m, IP65, Plastic,
white

Plastic LED emergency exit sign luminaire with convex shaped surround for wall mounting.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The set of pictograms is inserted on the inside and secured without the use of solvents.

Wireless central control and monitoring for large installations of up to 50,000 luminaires with Wireless Professional. The set of pictograms (MTL, MTR and 2 straight arrows) is supplied as standard.



More information
www.rp-group.com/en/item/PMW408WL



TECHNICAL DATA


| | |
|------------------------|-------------------------------------|
| Luminaire type | Exit sign |
| Mounting | Wall |
| Recognition distance | 20 m |
| Pictograph | Set |
| Illuminant | LED |
| Housing material | Plastic |
| Housing color | white |
| Protection type (IP) | IP65 |
| Impact resistance (IK) | 6 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 2 |
| Supply | Single Battery |
| Monitoring | Wireless Professional (WL) |
| Bridging time | 8 h |
| Battery | LiFePO4 6,4 V/1,6Ah Ah |
| Operating mode | Standby circuit / permanent circuit |
| Input voltageAC | 230 V |



| | |
|--------------------------|---------------------|
| Input frequency | 50 Hz |
| Power max. | 3,8 W |
| Power DS | 2,9 W |
| Power BS | 0,8 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Depth | 65 mm |
| Width | 236 mm |
| Height | 136 mm |
| Weight | 0.77 |
| Weight incl. packaging | 0.9 |
| Connection cross-section | 2.5 mm ² |
| Switching input | Yes |
| Emergency light blocking | Yes |
| Battery connection | Connector |
| Dimming function | Yes |
| Customs tariff number | 94056120 |
| EAN | 4260682159007 |



TECHNICAL DRAWING

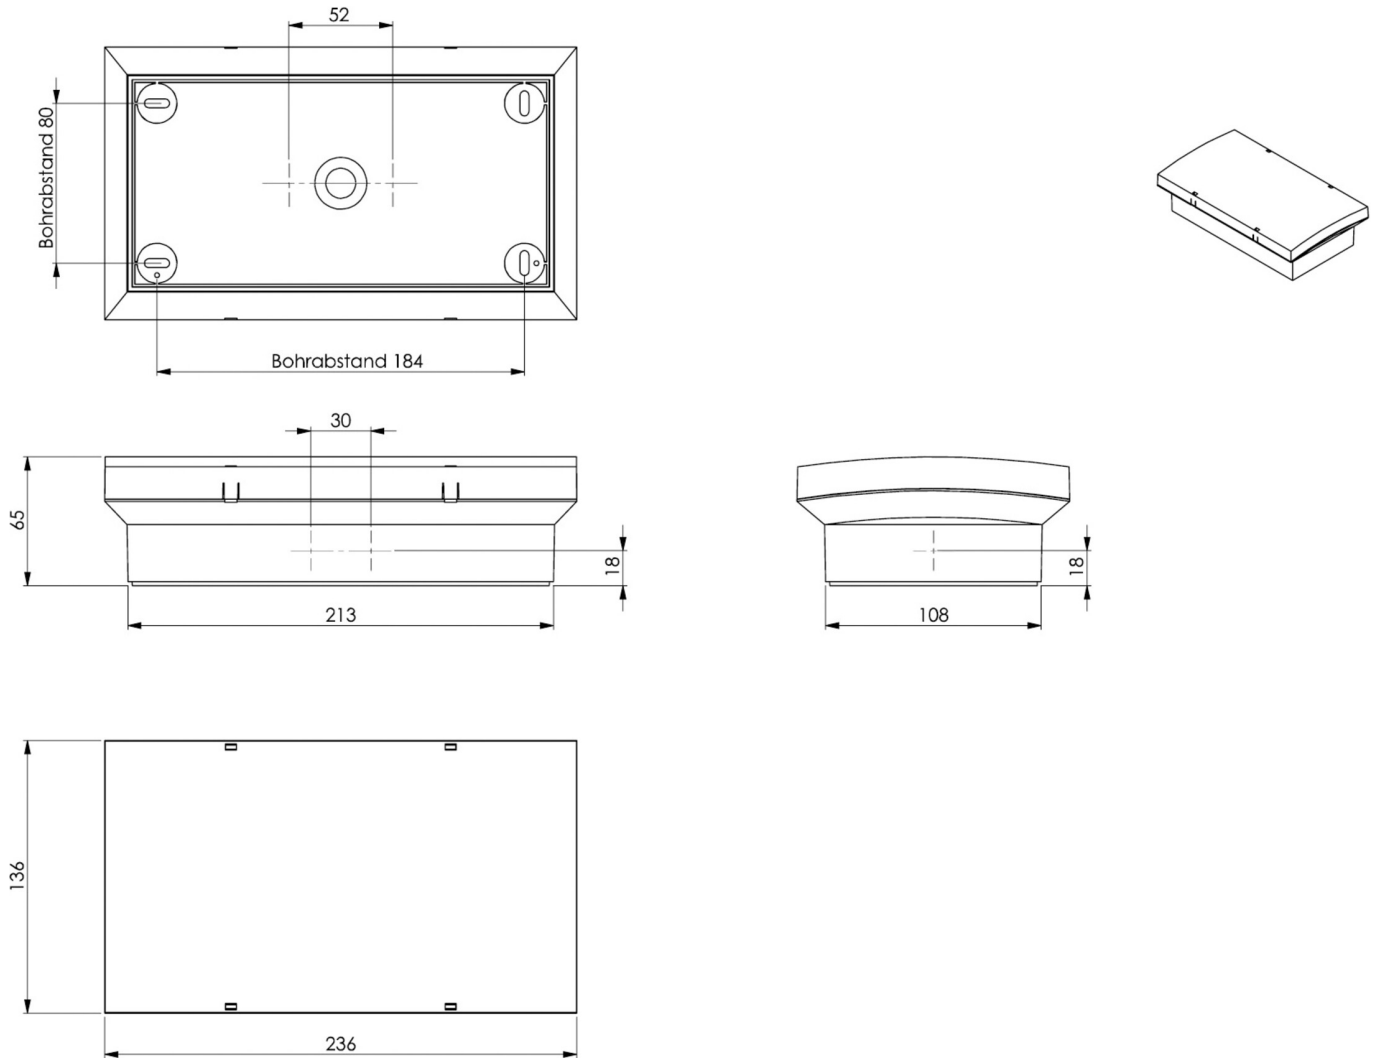

As of: 11.09.2024 - Subject to technical changes and errors.