




Art.-Nr: PMW423SC
Safety luminaire Supply
Universal, SelfControl (SC), 3 h , IP65, Plastic, white

Plastic safety luminaire with convex shaped surround.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

Automatic monitoring of safety luminaire with SelfControl. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.

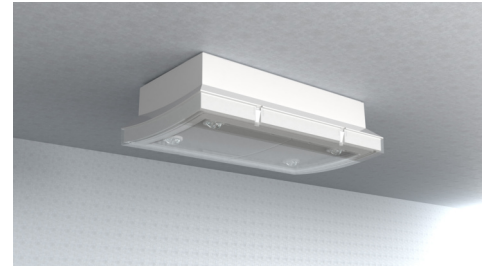

More information

www.rp-group.com/en/item/PMW423SC




TECHNICAL DATA

Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Housing material	Plastic
Housing color	white
Protection type (IP)	IP65
Impact resistance (IK)	6
Certification	CE, WEEE, D-Sign
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	3 h
Battery	6,4 V 3,3Ah Ah/
Power max.	6,7 W
Power DS	5,4 W
Power BS	0,9 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Depth	65 mm



Width	236 mm
Height	136 mm
Weight	0.83
Weight incl. packaging	0.96
Luminous flux mains	500 lm
Luminous flux emergency	500 lm
Customs tariff number	94056120
EAN	4260766553684

TECHNICAL DRAWING

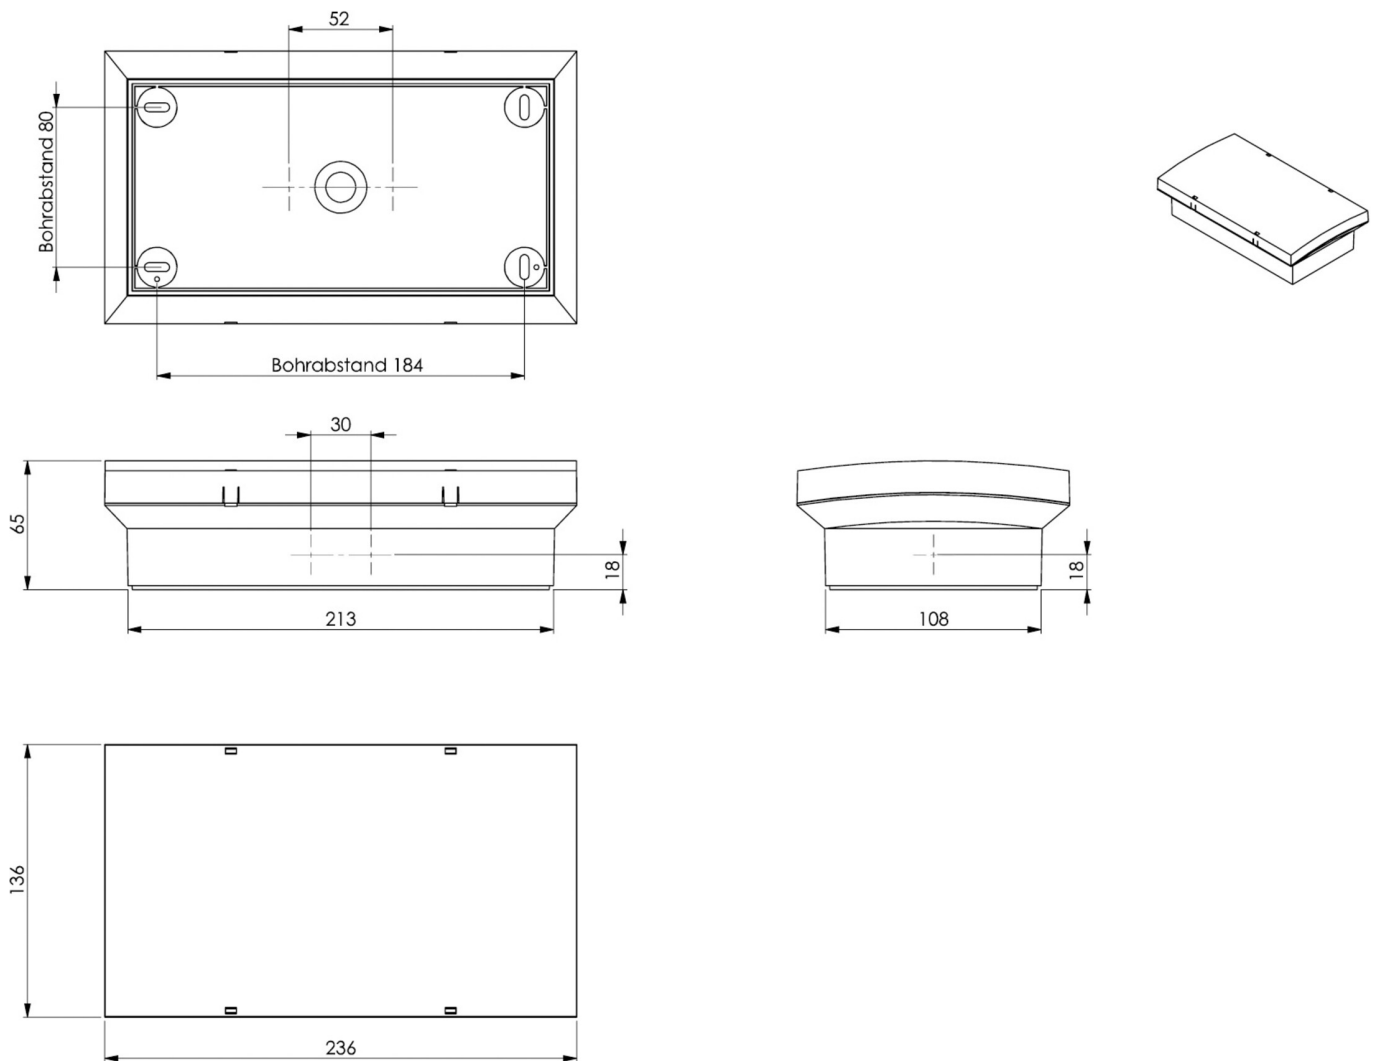



ACCESSORY LIST

LSYS-B4 -

LSYS-F4 -

LSYS-H4 -

LSYS-R4 -

LSYS-S4 -

LFP3233-SET-2AKKU - CS_VALUE_BatteryTechnology. Battery

As of: 23.08.2024 - Subject to technical changes and errors.