




**Art.-Nr: PMW529CC**  
**Safety luminaire Centralised power supply systems**  
**Universal, CoreCompact 24 (CC), CPS, , IP65, Plastic, white**

Plastic safety luminaire with convex shaped surround.

To help with mounting, levelling screws are integrated to compensate for uneven surfaces.

The luminaire can be mounted by fitting on the wall and ceiling as well as fitting in the ceiling in conjunction with the mounting frame available.

Control and monitoring via central 24 V low-power system. The luminaire is fitted with the innovative flexible plug-in system for rapid use of the right lens. The hall lens is supplied with every luminaire. A round lens, spotlight lens and beam lens are available as options.

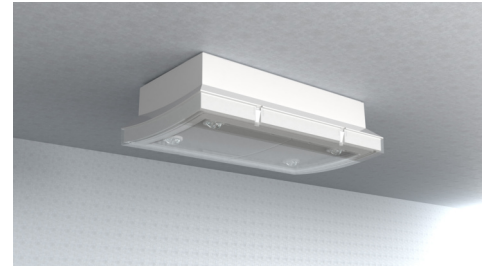

More information

[www.rp-group.com/en/item/PMW529CC](http://www.rp-group.com/en/item/PMW529CC)



## TECHNICAL DATA


|                        |                                     |
|------------------------|-------------------------------------|
| Luminaire type         | Safety luminaire                    |
| Mounting               | Universal                           |
| Pictograph             | No                                  |
| Housing material       | Plastic                             |
| Housing color          | white                               |
| Protection type (IP)   | IP65                                |
| Impact resistance (IK) | 6                                   |
| Certification          | CE, WEEE, D-Sign                    |
| Insulation class       | 2                                   |
| Supply                 | Centralised power supply systems    |
| Monitoring             | CoreCompact 24 (CC)                 |
| Bridging time          | CPS                                 |
| Battery                | /                                   |
| Operating mode         | Standby circuit / permanent circuit |
| Input voltageAC        | 24 V                                |
| Power max.             | 5,1 W                               |
| Power DS               | 5,1 W                               |
| Power BS               | 0,4 W                               |



|                          |                     |
|--------------------------|---------------------|
| Ambient temperature DS   | -5 °C - 40 °C       |
| Ambient temperature BS   | -5 °C - 40 °C       |
| Depth                    | 65 mm               |
| Width                    | 236 mm              |
| Height                   | 136 mm              |
| Weight                   | 0.6                 |
| Weight incl. packaging   | 0.73                |
| Connection cross-section | 2.5 mm <sup>2</sup> |
| Switching input          | No                  |
| Emergency light blocking | No                  |
| Battery connection       | No                  |
| Luminous flux mains      | 520 lm              |
| Luminous flux emergency  | 520 lm              |
| Customs tariff number    | 94056120            |
| EAN                      | 4260766552014       |



## TECHNICAL DRAWING

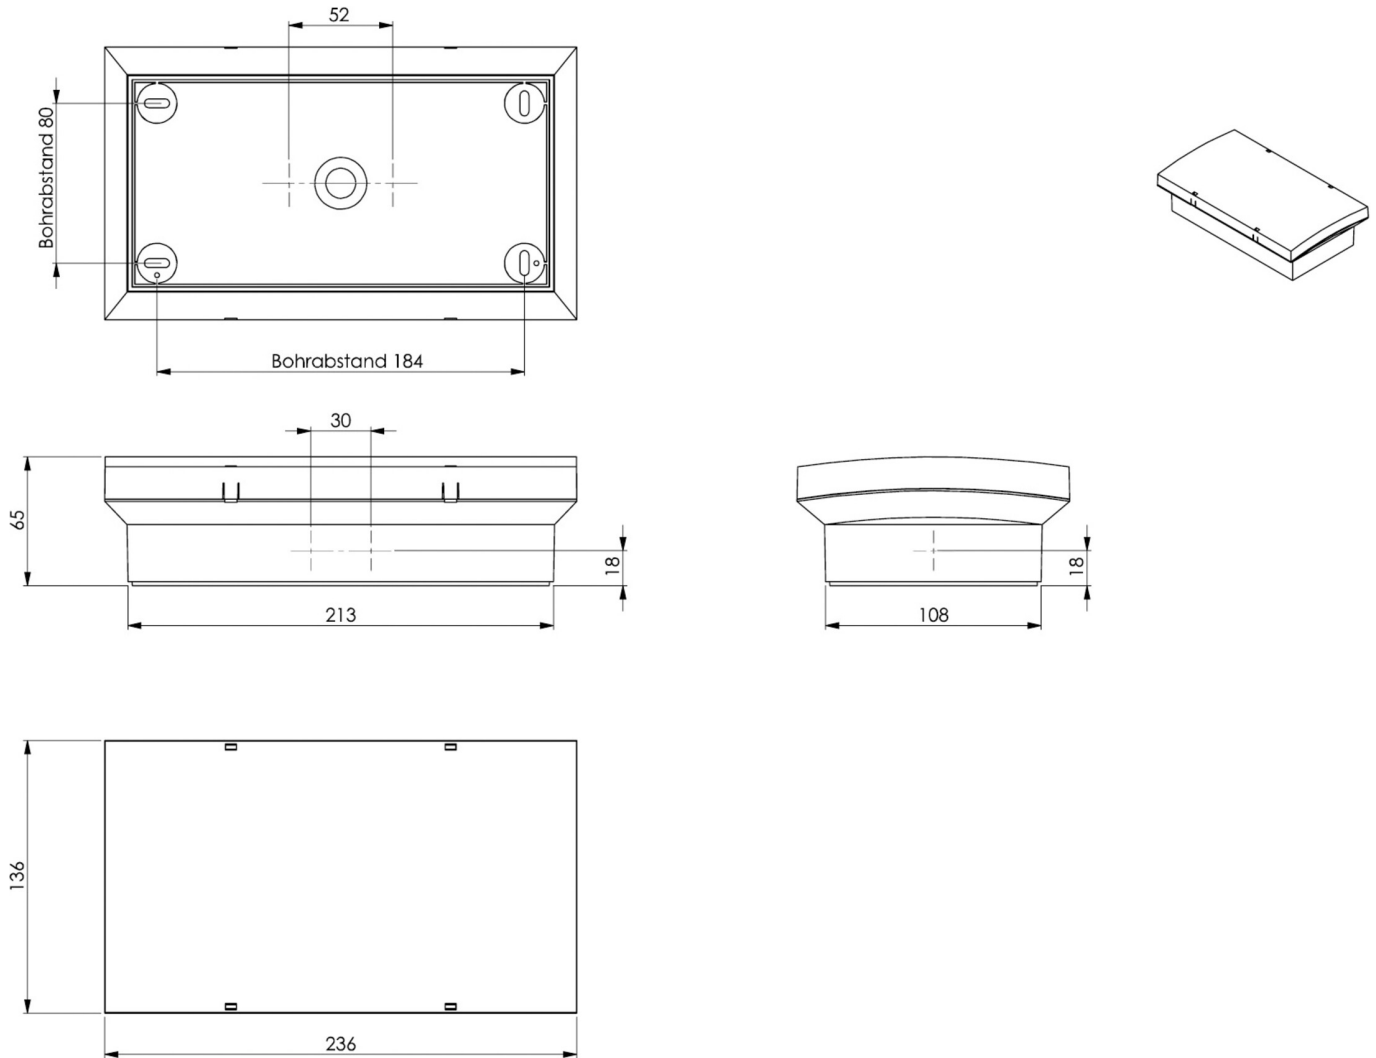

## ACCESSORY LIST

- LSYS-B4 -
- LSYS-F4 -
- LSYS-H4 -
- LSYS-R4 -
- LSYS-S4 -

As of: 23.08.2024 - Subject to technical changes and errors.