



**Art.-Nr: QAW403SC-SIWW**  
**General light, Safety luminaire Single Battery**  
**Universal, SelfControl, 3 h, , IP20, Aluminium, white**

Round metal luminaire for general lighting and the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. In mains operation the luminaire works with 26W / 1.600lm LED.



[More information](#)




## TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminium
Housing color	white
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Single Battery
Monitoring	SelfControl
Bridging time	3 h
Operating mode	Standby circuit / permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	30 W
Power DS	28 W
Power BS	2 W



Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Height	113 mm
Diameter	395 mm
Weight	0.787
Weight incl. packaging	1.107
Connection cross-section	1.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	No
Luminous flux mains	2300 lm
Luminous flux emergency	360 lm
Customs tariff number	94056180
EAN	4260682159700

## TECHNICAL DRAWING

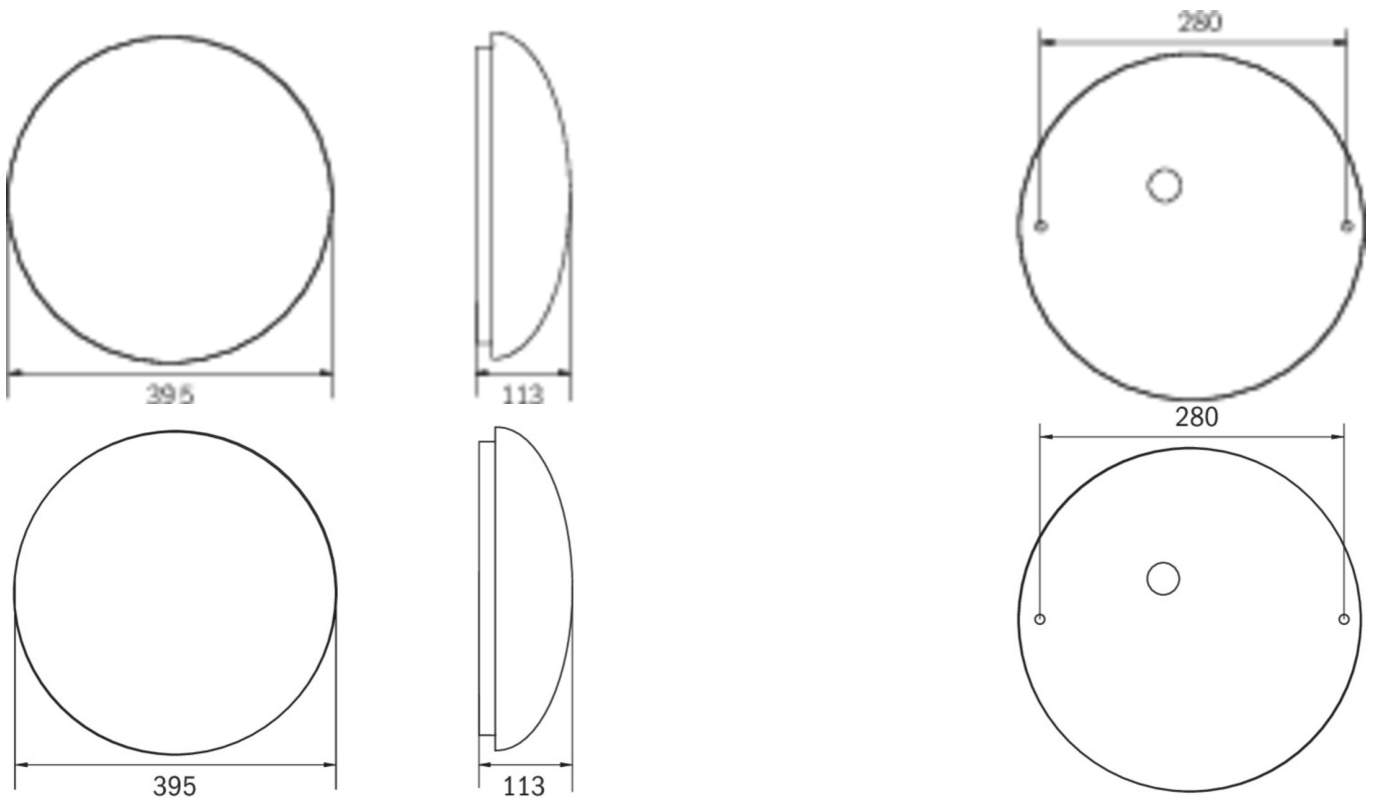

As of: 17.07.2024 - Subject to technical changes and errors.