



**Art.-Nr: QAW428WL-BMWW**  
**General light, Safety luminaire Single Battery**  
**Universal, Wireless Professional, 8 h , IP20, Aluminium, white**

Round metal luminaire for general lighting and the lighting of escape and rescue routes according to DIN EN 60598-1, DIN EN 60598-2-22 and EN 1838. The LED-luminaire is operated with 26W, 2.300lm and light colour 3000 Kelvin. The general light is switched independently of the emergency light via the motion detector, which is not visible from the outside.



More information



## TECHNICAL DATA



Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminium
Housing color	white
Protection type (IP)	IP20
Impact resistance (IK)	≥ 3
Certification	WEEE, CE
Insulation class	1
Supply	Single Battery
Monitoring	Wireless Professional
Bridging time	8 h
Battery	LiFePO4 3,2 V / 3,3 Ah LiFePO4 - Lithium Iron Phosphate Battery
Operating mode	Standby circuit / permanent circuit
Input voltage AC	230 V
Input frequency	50 / 60 Hz
Power max.	30 W
Power DS	26,4 W



Power BS	0,4 W
Ambient temperature DS	-5 °C - 30 °C
Ambient temperature BS	-5 °C - 35 °C
Height	113 mm
Diameter	395 mm
Weight	0.78
Weight incl. packaging	1.1
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	Connector
Dimming function	Yes
Luminous flux mains	2300 lm
Luminous flux emergency	125 lm
Customs tariff number	94056180
EAN	4260766550591



TECHNICAL DRAWING

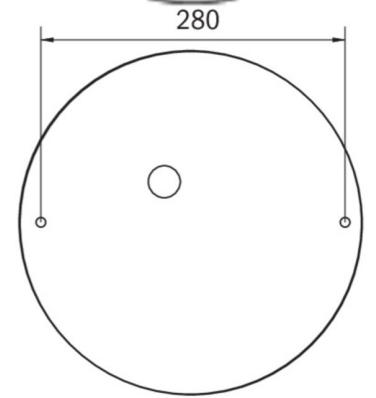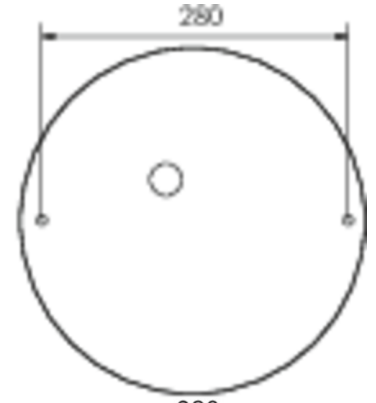

As of: 17.07.2024 - Subject to technical changes and errors.