



#### Art.-Nr: QBW029ML-BM General light, Safety luminaire Centralised power supply systems Universal, Central power supply (ML), CPS, , IP44, Plastic, white

Round plastic luminaire for general-purpose lighting with integrated motion detector. To illuminate escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In a timeless design, suited to indoor use. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example. By means of the motion detector, which cannot be seen from the outside, the general-purpose light is switched independently of the emergency light.

Control and monitoring via central power supply system.

# CE

#### **TECHNICAL DATA**

Luminaire type	General light, Safety luminaire			
Mounting	Universal			
Pictograph	No			
Illuminant	LED			
Housing material	Plastic			
Housing color	white			
Protection type (IP)	IP44			
Impact resistance (IK)	6			
Certification	WEEE, CE			
Insulation class	2			
Supply	Centralised power supply systems			
Monitoring	Central power supply (ML)			
Bridging time	CPS			
Battery	/			
Operating mode	single luminaire switching			
Input voltageAC	230 V			
Input frequency	50 / 60 Hz			



More information www.rp-group.com/en/item/QBW029ML-BM







Input voltage DC	216 V
Power max.	19,5 W
Power DS	17,5 W
Power BS	1,6 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C
Height	98 mm
Diameter	339 mm
Weight	1.47
Weight incl. packaging	1.69
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	Yes
Emergency light blocking	No
Battery connection	No
Dimming function	Yes
Luminous flux mains	1800 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
EAN	4260682146205







## TECHNICAL DRAWING









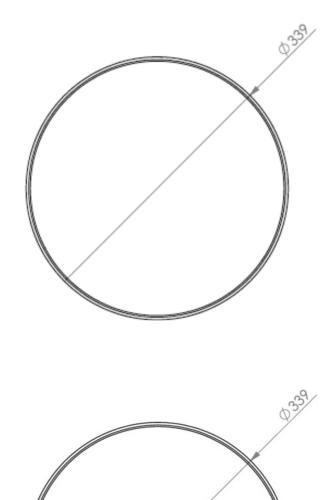





### **RELATED PRODUCTS**

ArtNo.	Image	Monitoring	Supply	Color	Investment	Automatic log	Maintenance level	Remote main- tenance	max. luminai- res	Single luminai- re monitoring
QBW029ML	0	Central power supply (ML)	Central power supply	RAL 9003	€€€	Yes	low	Yes	1,920 per sys- tem	central

As of: 23.08.2024 - Subject to technical changes and errors.