



Art.-Nr: QBW421SC-BM
General light, Safety luminaire Supply
Universal, SelfControl (SC), 1 h , IP44, Plastic, white

Round plastic luminaire for general-purpose lighting with integrated motion detector. To illuminate escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

In a timeless design, suited to indoor use. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example. By means of the motion detector, which cannot be seen from the outside, the general-purpose light is switched independently of the emergency light.

Automatic monitoring of safety luminaire with SelfControl.



More information

www.rp-group.com/en/item/QBW421SC-BM



TECHNICAL DATA

Luminaire type	General light, Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Plastic
Housing color	white
Protection type (IP)	IP44
Impact resistance (IK)	6
Certification	WEEE, CE
Insulation class	2
Monitoring	SelfControl (SC)
Bridging time	1 h
Battery	LiFePO4 6,4 V/1,2 Ah
Power max.	18,5 W
Power DS	17,7 W
Power BS	1,4 W
Ambient temperature DS	-5 °C - 40 °C
Ambient temperature BS	-5 °C - 40 °C



Height	98 mm
Diameter	339 mm
Weight	1.62
Weight incl. packaging	1.84
Luminous flux mains	1800 lm
Luminous flux emergency	470 lm
Customs tariff number	94056180
EAN	4262483020920





TECHNICAL DRAWING

QBW



QBW

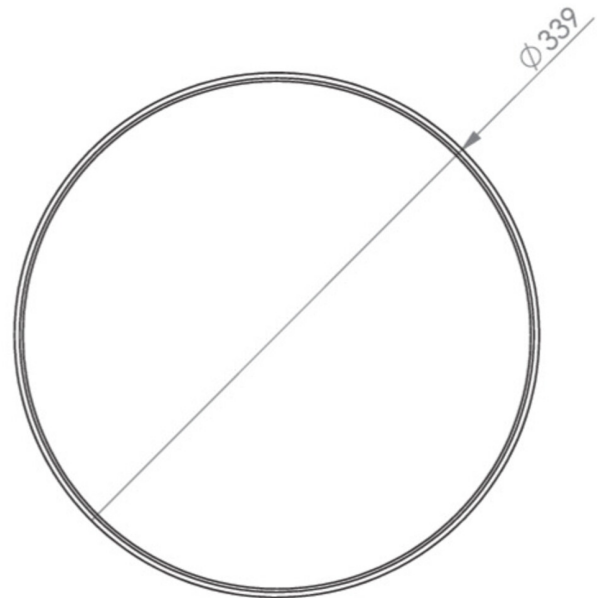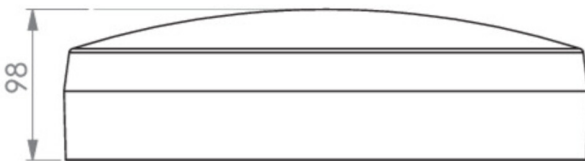

As of: 29.10.2024 - Subject to technical changes and errors.