



Art.-Nr: QCW009ML-AZ-BM

General light, Safety luminaire Centralised power supply systems

Universal, Central power supply (ML), CPS, , IP54, Zinc die-cast, Anthracite

Round zinc die-cast luminaire for general-purpose lighting with integrated motion detector. To illuminate escape and emergency routes in accordance with DIN EN 60598-1, DIN EN 60598-2-22 and DIN EN 1838.

A robust variant in a timeless design, suited to indoor and outdoor use. When mounting, the emergency light LED can be swung out without the need for tools, to perfectly illuminate the escape and emergency routes when mounted on a wall, for example. By means of the motion detector, which cannot be seen from the outside, the general-purpose light is switched independently of the emergency light.

Control and monitoring via central power supply system.



More information

www.rp-group.com/en/item/QCW009ML-AZ-BM



TECHNICAL DATA

| | |
|------------------------|----------------------------------|
| Luminaire type | General light, Safety luminaire |
| Mounting | Universal |
| Pictograph | No |
| Illuminant | LED |
| Housing material | Zinc die-cast |
| Housing color | Anthracite |
| Protection type (IP) | IP54 |
| Impact resistance (IK) | 10 |
| Certification | WEEE, CE, D-Sign |
| Insulation class | 1 |
| Supply | Centralised power supply systems |
| Monitoring | Central power supply (ML) |
| Bridging time | CPS |
| Battery | / |
| Operating mode | Permanent circuit |
| Input voltageAC | 230 V |




| | |
|--------------------------|---------------------|
| Input frequency | 50 Hz |
| Input voltage DC | 216 V |
| Power max. | 19,5 W |
| Power DS | 17,5 W |
| Power BS | 2 W |
| Ambient temperature DS | -5 °C - 40 °C |
| Ambient temperature BS | -5 °C - 40 °C |
| Height | 106 mm |
| Diameter | 363 mm |
| Weight | 2.59 |
| Weight incl. packaging | 2.92 |
| Connection cross-section | 1.5 mm ² |
| Switching input | No |
| Emergency light blocking | No |
| Battery connection | No |
| Dimming function | No |
| Luminous flux mains | 1600 lm |
| Luminous flux emergency | 1600 lm |
| Customs tariff number | 94056180 |
| EAN | 4260682146311 |




TECHNICAL DRAWING

QCW

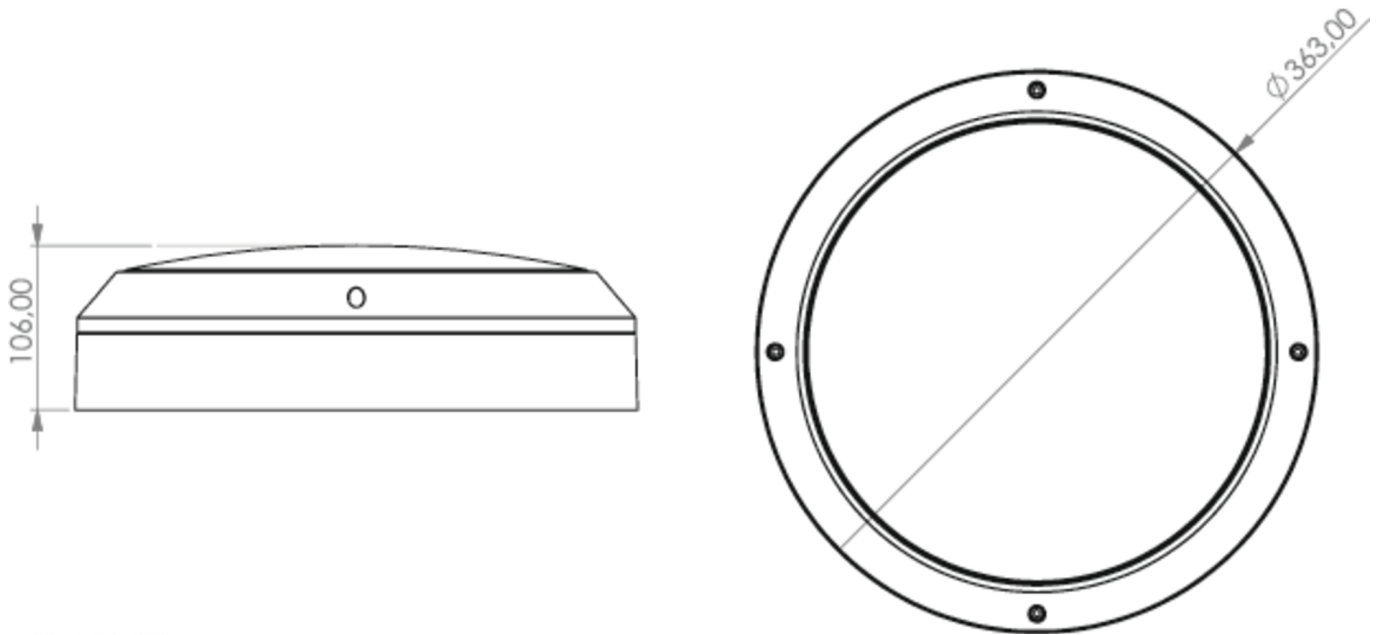

QCW

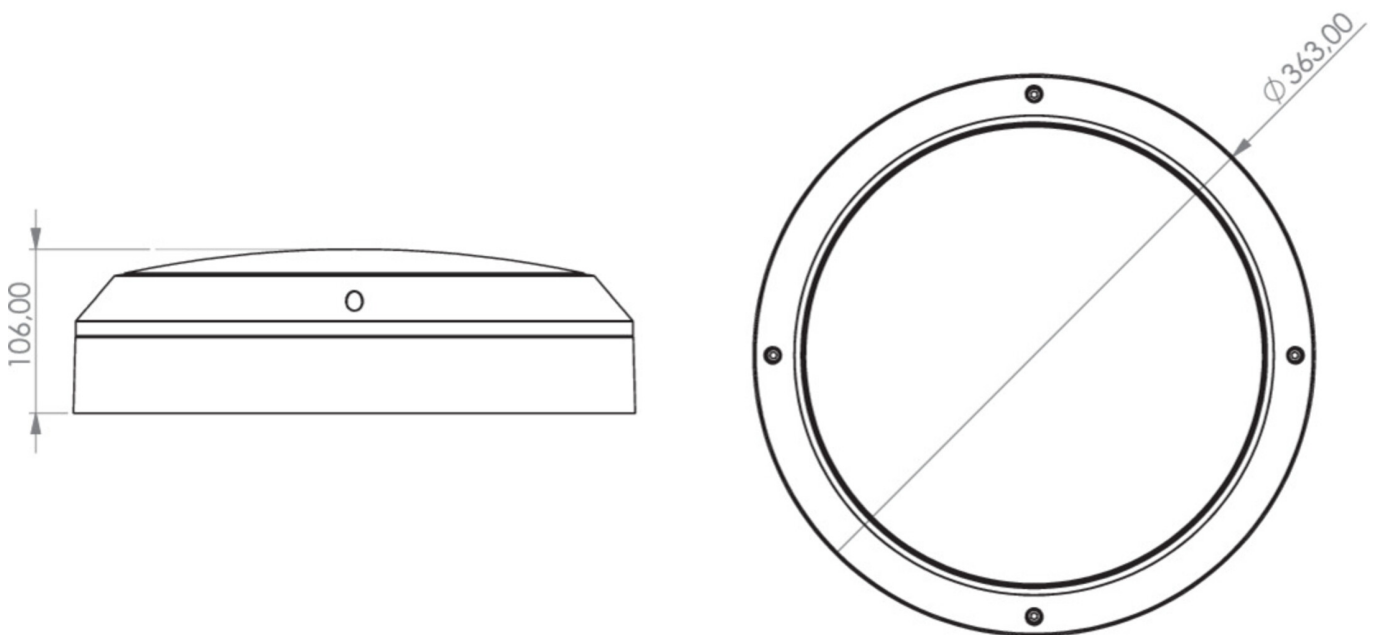

As of: 16.09.2024 - Subject to technical changes and errors.