



**Art.-Nr: XPMU009ML**

**Safety luminaire Centralised power supply systems  
Universal, Central power supply (ML), CPS, , IP66, Aluminum  
die-cast, Polycarbonate, Housing color**

Polycarbonate cylinder safety luminaire with explosion protection for gas and dust Ex zones.

Prepared for two cable entries for feed-through wiring. By attaching a pictogram, can also be used as an emergency exit sign luminaire.

By means of mounting adapter for wall/ceiling mounting or suspension by means of eye bolt.

Labelling according to 2014/34/EC (ATEX)

Zone 1 / zone 21 gas and dust

- Ex d IIB T6 Gb / Ex d IIB T6 Gb
- Ex t IIIC T85°C Db

Manufactured in accordance with

-EN 60079-0:2018, EN 60079-1:2014, EN 60079-31:2014

-Certified by INERIS 20ATEX0005X

Control and monitoring via central power supply system.



More information

[www.rp-group.com/en/item/XPMU009ML](http://www.rp-group.com/en/item/XPMU009ML)



## TECHNICAL DATA


Luminaire type	Safety luminaire
Mounting	Universal
Pictograph	No
Illuminant	LED
Housing material	Aluminum die-cast, Polycarbonate
Protection type (IP)	IP66
Impact resistance (IK)	5
Certification	WEEE, CE
Insulation class	1
Supply	Centralised power supply systems
Monitoring	Central power supply (ML)
Bridging time	CPS



Battery	/
Operating mode	Permanent circuit
Input voltageAC	230 V
Input frequency	50 / 60 Hz
Power max.	20 W
Power DS	20 W
Power BS	1,5 W
Ambient temperature DS	-20 °C - 40 °C
Ambient temperature BS	-20 °C - 40 °C
Depth	750 mm
Width	157 mm
Height	197 mm
Weight	5.5
Weight incl. packaging	6.4
Connection cross-section	2.5 mm <sup>2</sup>
Switching input	No
Emergency light blocking	No
Battery connection	No
Dimming function	No
Luminous flux mains	2400 lm
Luminous flux emergency	2400 lm
Customs tariff number	94051190
EAN	4260682145468



## TECHNICAL DRAWING

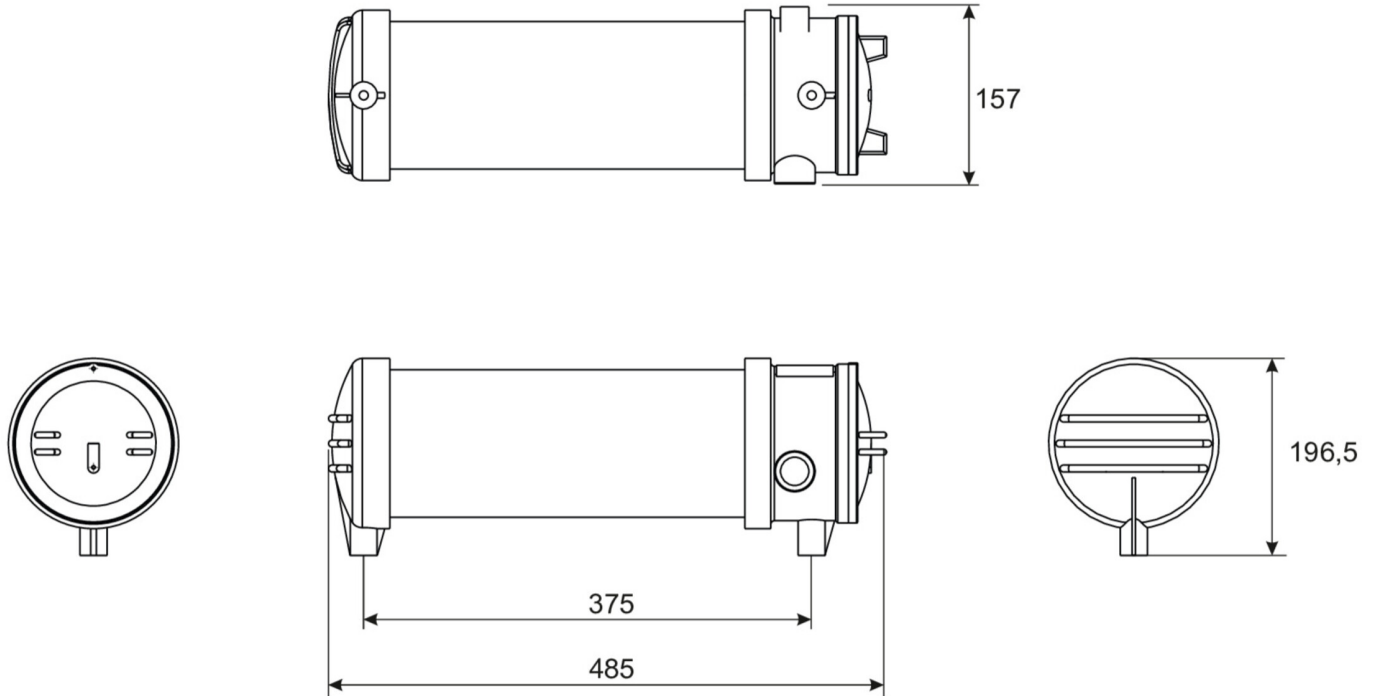

## ACCESSORY LIST

X-K0001 -  
X-MB001 -  
X-KE001 -  
X4N -

As of: 16.09.2024 - Subject to technical changes and errors.