




Art.-No.: YMOCA-QA-SB Single rocker for CASAMBI wireless

The single kinetic push button is an advanced control element powered by kinetic energy. By simply pressing the button, energy is generated and utilized for the wireless control of lighting or other functions within a Casambi network. This environmentally friendly and wireless solution provides users with a convenient way to regulate their lighting without relying on conventional batteries or wiring. With the four-fold kinetic push button, you can effortlessly adjust the lighting atmosphere in your space while also embracing sustainable energy sources.

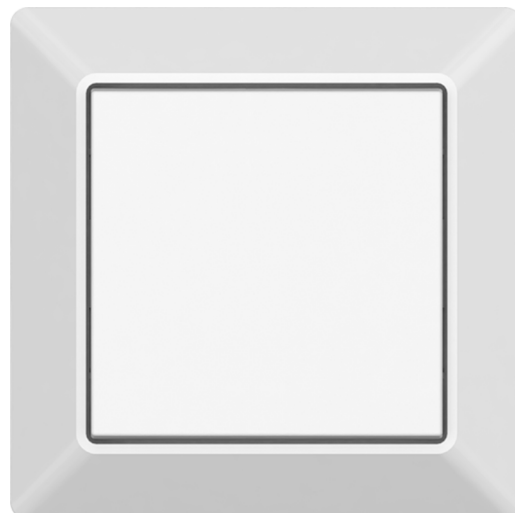

DANE TECHNICZNE

Electrical data	
Communication type	Bluetooth
Frequency band	2,403 - 2,479 GHz
CASAMBI Ready	Yes
Acceptance tests	
Certifications	CE
Ambient temperature	-25 to +65 C°
Storage temperature	-25 to +65 C°
Physical data	
Mounting method	wall mounted
Housing colour	white
Length (L)	80,5 mm
Width (B)	80,5 mm
Height (H)	14,7 mm
Weight incl. Packaging	0,12 kg
Packaging Length (L)	100 mm
Packaging Width (B)	110 mm
Packaging Height (H)	55 mm