




**Art.-Nr: YMOCA-SAL-2016**  
**Salvador 2016**  
**Capable of managing up to 16 DALI driver addresses with integrated DALI bus power supply.**

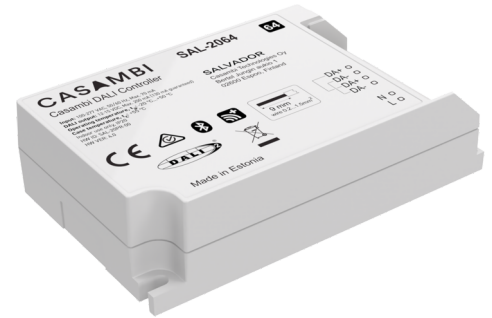

The Salvador Series 2000 seamlessly integrates wired DALI drivers into the Casambi system. When integrated, DALI luminaires appear as luminaires in the Casambi network. Notably, this product supports industry standards such as DALI D4i, DALI DT6, and DALI DT8.

The Salvador Series 2000 is only for connecting to DALI drivers. No DALI controls must be connected to Salvador Series 2000 products.

The Salvador Series 2000 has integrated 130 mA bus power supply for the DALI operation.

More information

[www.rp-group.com/en/item/YMOCA-SAL-2016](http://www.rp-group.com/en/item/YMOCA-SAL-2016)



**TECHNICAL DATA**

<b>Dimensions</b>	
Product dimensions Length	127 mm
Product dimensions Width	67 mm
Product dimensions Height	28 mm
Product weight	120 g
<b>Color</b>	
Color	white
<b>Housing material</b>	
Housing material	Plastic
<b>Storage temperature range</b>	
Storage temperature range (Min)	-25 °C
Storage temperature range (Max)	+75 °C
<b>Housing temperature</b>	
Ambient temperature (Max)	+55 °C
<b>Temperatures</b>	
Ambient temperature (Min)	-20 °C
Ambient temperature (Max)	+50 °C
<b>CASAMBI Products</b>	



Input voltage AC	230 V
Input frequency	50 / 60 Hz
External power supply unit	No
Communication type	CASAMBI, Bluetooth, DALI 1, DALI 2
Frequency band	2,403 - 2,479 GHz
Max. transmission power	+8 dBm
BMS	DALI
DALI bus supply	Yes
DALI bus voltage	12 - 15 VDC
DALI output current	130 mA
Number of DALI addresses	16 pcs.
CASAMBI Repeater	Yes
Certifications	CE
<b>CASAMBI Connection</b>	
Mounting	Universal
Connection cross-section	1,5 mm <sup>2</sup>

As of: 29.01.2025 - Subject to technical changes and errors.