



**Art.-Nr: YTUSW-LANS-2001**  
**LED moisture-proof luminaire "SWIM", w-/c-**  
**surface mounting, 780x70x70mm, 17W,**

LED moisture-proof luminaire, SWIM series, IP69, IK08. The luminaire may be immersed to a depth of 10 m. Housing and side sections made from polycarbonate(PC), grey (UV- and chlorine-resistant). Opal diffuser made from PC, UV- and chlorine-resistant. Symmetric light distribution and homogeneous illumination. Feed-through wiring present. Power supply, can be switched or dimmed (DALI dimmer), integrated. NANO protection on request. Area of application: car washes, chemical industry, swimming pools etc.



Mer informasjon



#### TEKNISKE DATA



Dimensjoner	
Produktdimensjoner lengde	780 mm
Produktdimensjoner bredde	70 mm
Produktmål høyde	70 mm
Produktvekt	1.6 kg
Emballasjedimensjoner	
Vekt inkludert emballasje	1.9 kg
Koffertmateriale	
Koffertmateriale	Polykarbonat
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP66
Slagfasthetsgrad (IK)	10
Elektrisk forbindelse	
Systemytelse	17 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	23 A
Maktfaktor	0.9 PF



Innkoblingstid	176 $\mu$ s
<b>Strømforsyning</b>	
Antall strømforsyninger på LS C16A	57 Stk.
Elektrisk versjon	med intern driftsenhet, Byttbar
<b>Lystekniske data</b>	
lyskilde	LED
Nominell lysstrøm	1900 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	3
Strålevinkel	140 °
fargetemperatur	4000 K
lys farge	840
UGR	25.5
levetid	70000 h, L80
lyseffekt	112 lm/w
<b>temperaturer</b>	
Omgivelsestemperatur (min)	-20 °C
Omgivelsestemperatur (maks.)	+40 °C
<b>Monteringstype</b>	
Monteringstype	Takkonstruksjon



TEXT.LICHTVERTEILUNG

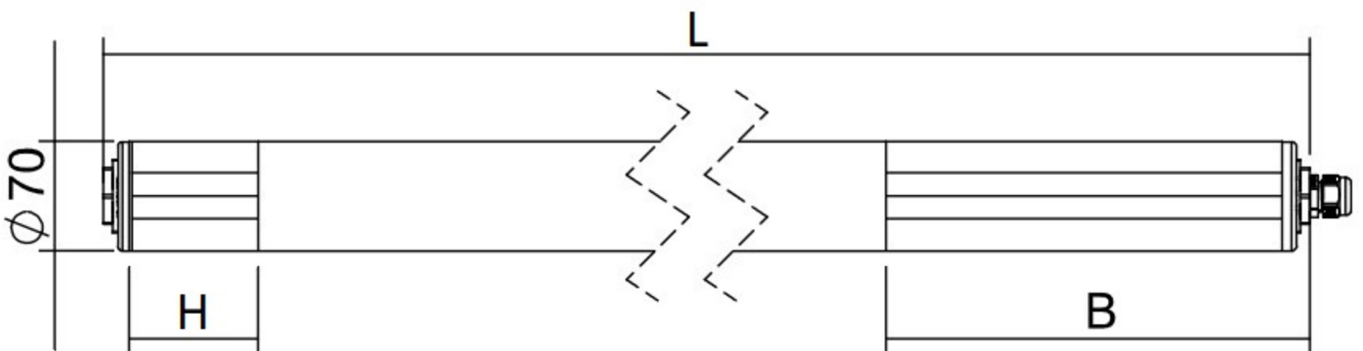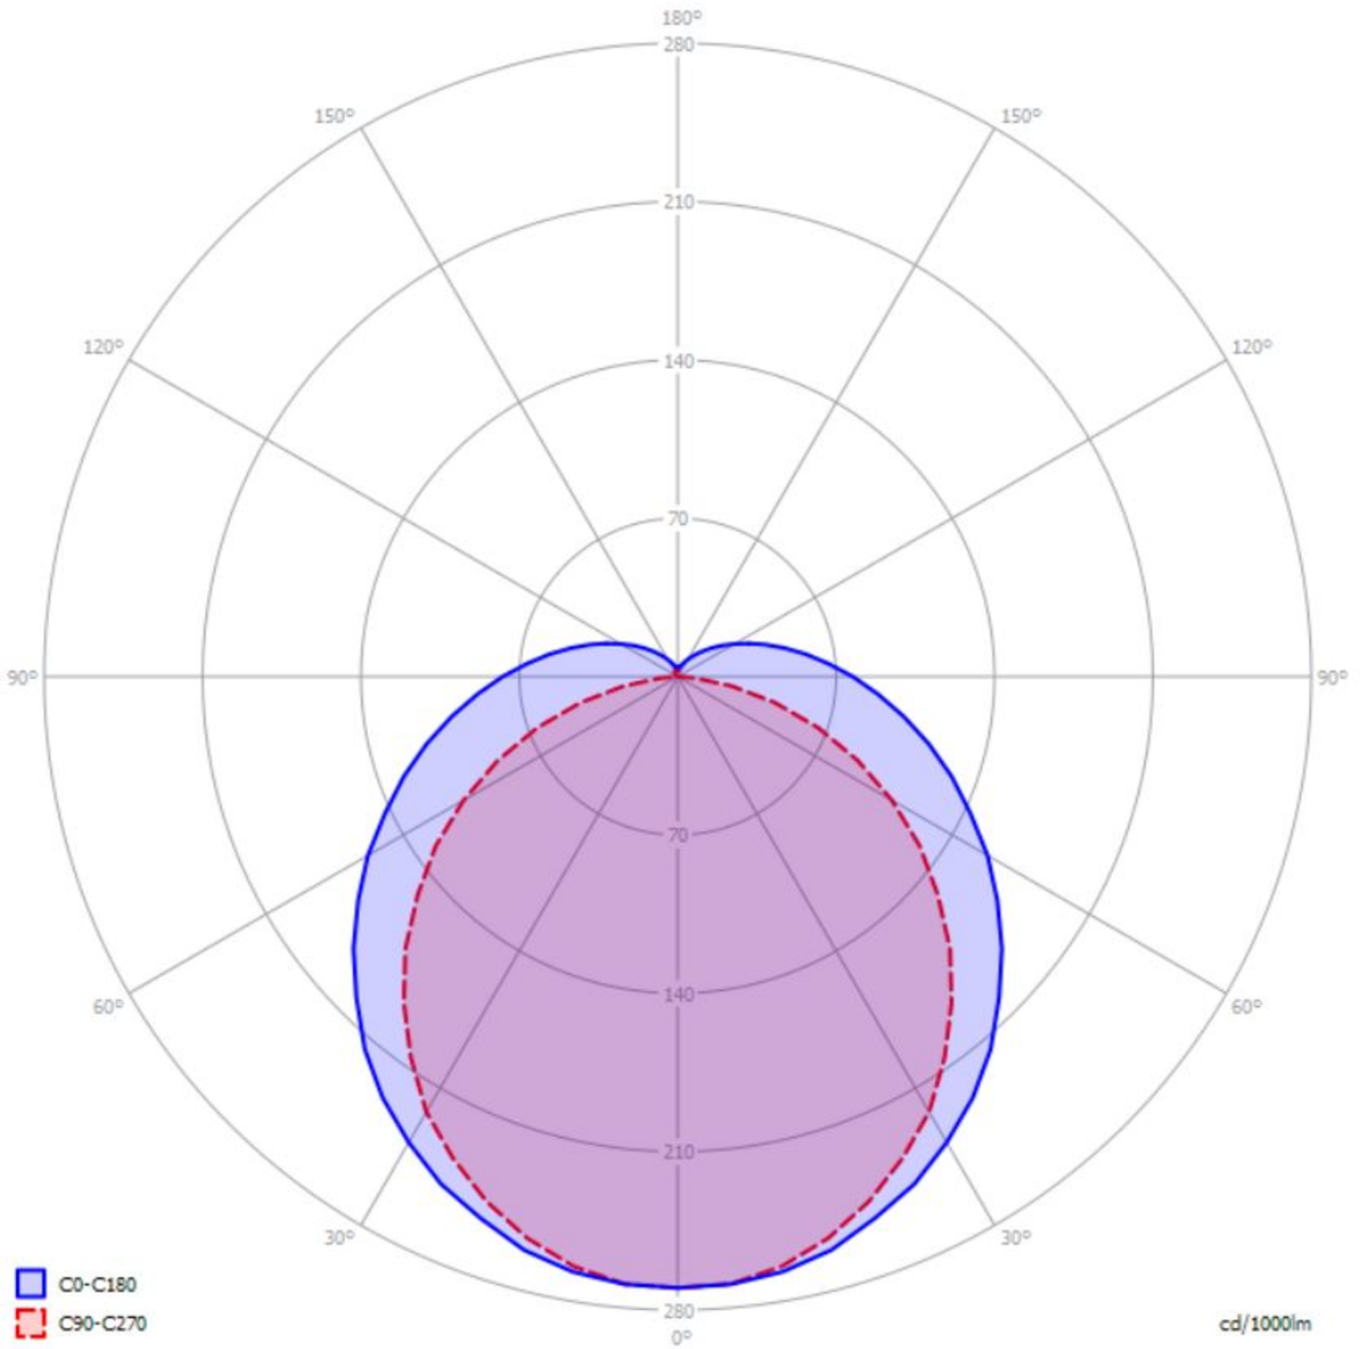



## TILBEHØRSLISTE

YTUSW-MONKL-ES - Mounting bracket for SWIM, stainless steel, 1 pc.

YTUSW-MONKL-PCDGR - Mounting bracket for SWIM, polycarbonate, dark gray, 1 pc.

YTUSW-MONKL-PCHGR - Mounting bracket for SWIM, polycarbonate, light gray, 1 pc.

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.