




**Art.-Nr: YWDLA-LAND-1201-U**  
**LED luminaire "LARO", wall / ceiling surface mounting,**  
**rectangular, 1403x93x80mm, 12W, 1550lm, 4000K, CRI >80,**  
**IP40, UGR <19, Dali dimmable**

LED ceiling- and wall-mounted luminaire, LARO series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), micro-prismatic, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 19 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available.

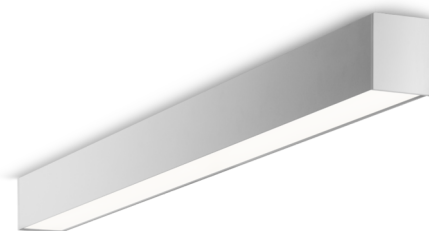

Mer informasjon

#### TEKNISKE DATA


| Dimensjoner                  |           |
|------------------------------|-----------|
| Produktdimensjoner lengde    | 1403 mm   |
| Produktdimensjoner bredde    | 93 mm     |
| Produktmål høyde             | 80 mm     |
| Produktvekt                  | 6.3 kg    |
| Emballasjedimensjoner        |           |
| Emballasjedimensjoner lengde | 1600 mm   |
| Emballasjemål bredde         | 150 mm    |
| Emballasjemål høyde          | 150 mm    |
| Vekt inkludert emballasje    | 6.5 kg    |
| Farge                        |           |
| Farge                        | Hvit      |
| Koffertmateriale             |           |
| Koffertmateriale             | aluminium |
| Sertifisering                |           |
| Sertifisering                | CE        |
| beskyttelses klasse          | 1         |
| IP-beskyttelse)              | IP40      |
| Glødetrådtest                | 650°C     |
| Elektrisk forbindelse        |           |






|                                    |                                   |
|------------------------------------|-----------------------------------|
| Tilkoblingstverrsnitt              | 1.5 mm <sup>2</sup>               |
| Dimming type                       | DALI                              |
| Systemytelse                       | 12 W                              |
| Inngangsspenning AC                | 220-240V / 50-60Hz V              |
| Startstrøm                         | 22.4 A                            |
| Maktfaktor                         | 0.98 PF                           |
| Innkoblingstid                     | 176 µs                            |
| <b>Lystekniske data</b>            |                                   |
| lyskilde                           | LED                               |
| Nominell lysstrøm                  | 1550 lm                           |
| Fargegjengivelsesindeks            | > 80 Ra                           |
| Fargetoleranse                     | 2                                 |
| Strålevinkel                       | 76/79,8 °                         |
| fargetemperatur                    | 4000 K                            |
| lys farge                          | 840                               |
| UGR                                | 19                                |
| levetid                            | 50000 h, L80                      |
| lyseffekt                          | 129 lm/w                          |
| <b>temperaturer</b>                |                                   |
| Omgivelsestemperatur (min)         | 0 °C                              |
| Omgivelsestemperatur (maks.)       | +25 °C                            |
| <b>Monteringstype</b>              |                                   |
| Monteringstype                     | Takkonstruksjon, Veggkonstruksjon |
| <b>Strømforsyning</b>              |                                   |
| Antall strømforsyninger på LS B10A | 13 Stk.                           |
| Antall strømforsyninger på LS B16A | 22 Stk.                           |
| Antall strømforsyninger på LS C10A | 21 Stk.                           |
| Antall strømforsyninger på LS C16A | 36 Stk.                           |
| Elektrisk versjon                  | med intern driftsenhet, Dimbar    |



TEXT.LICHTVERTEILUNG

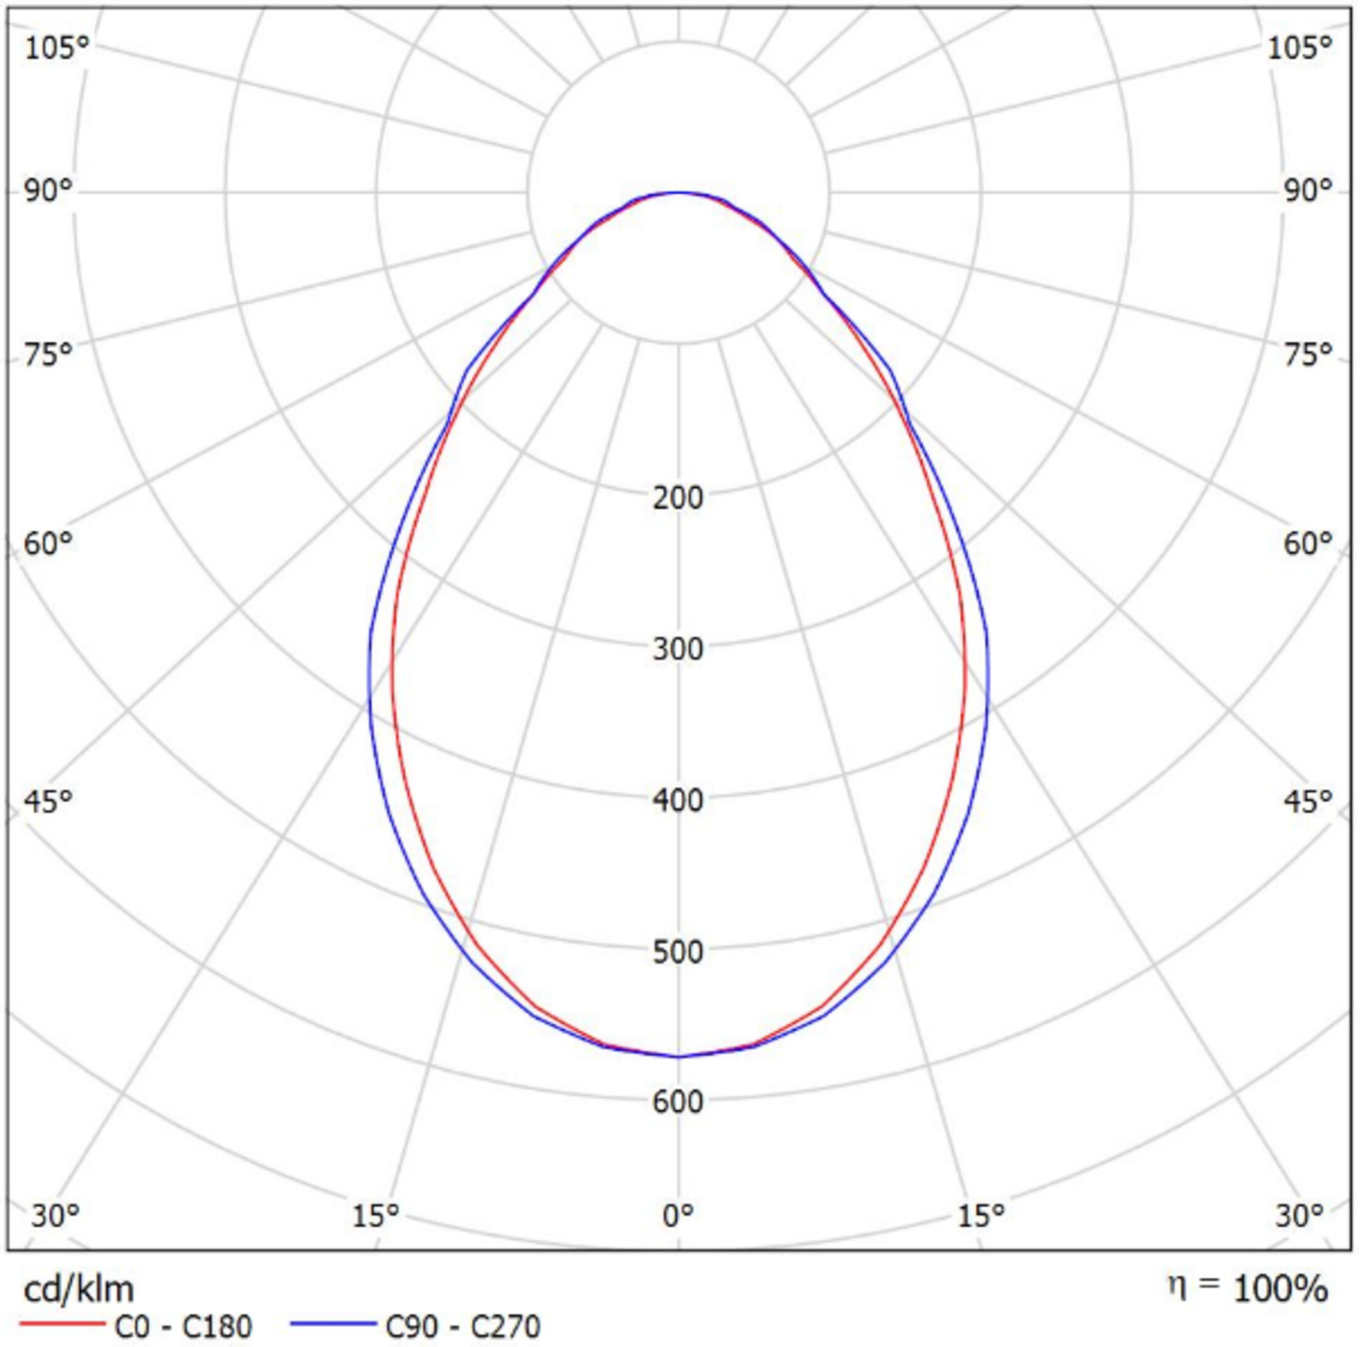

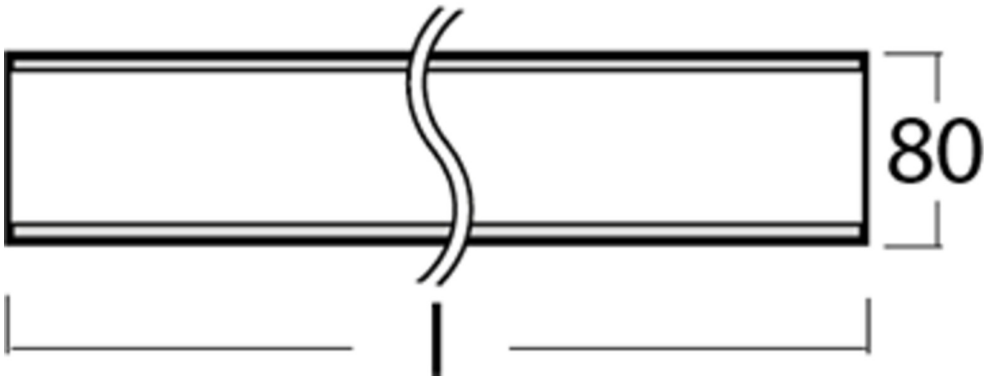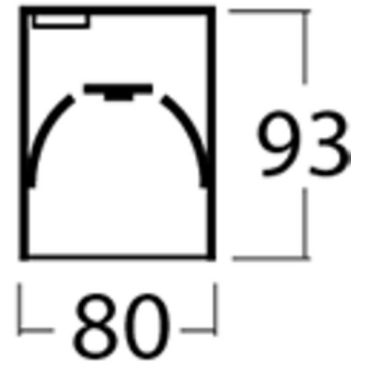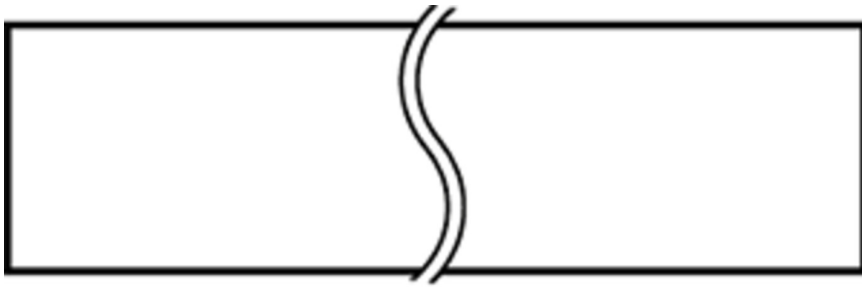

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.