




Art.-Nr: YWDLA-LAND-3301-U
LED luminaire "LARO", w-/c- surface mounting, rectangular, 1122x93x80mm, 33W, 3650lm, 4000K, CRI >80, IP40, UGR <19, Dali dimmable mounting, rectangular, 1127x93x80mm, 43W,



LED ceiling- and wall-mounted luminaire, LARO series, with direct and direct/indirect beam. Housing made from aluminium, white, powder-coated. Diffuser made from plastic (PMMA), micro-prismatic, UV-stabilised. Operating unit can be switched or dimmed (DALI dimmer), integrated. UGR < 19 and screen-compliant in accordance with EN 12464-1. Version with CASAMBI® Bluetooth control available.

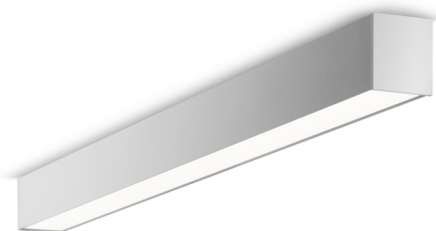

Mer informasjon



TEKNISKE DATA


Dimensjoner	
Produktdimensjoner lengde	1122 mm
Produktdimensjoner bredde	93 mm
Produktmål høyde	80 mm
Produktvekt	4.7 kg
Emballasjedimensjoner	
Emballasjedimensjoner lengde	1300 mm
Emballasjemål bredde	150 mm
Emballasjemål høyde	150 mm
Vekt inkludert emballasje	4.9 kg
Farge	
Farge	Hvit
Koffertmateriale	
Koffertmateriale	aluminium
Sertifisering	
Sertifisering	CE
beskyttelses klasse	1
IP-beskyttelse)	IP40
Glødetrådtypest	650°C






Elektrisk forbindelse	
Tilkoblingstverrsnitt	1.5 mm ²
Dimming type	DALI
Systemytelse	33 W
Inngangsspenning AC	220-240V / 50-60Hz V
Startstrøm	35 A
Maktfaktor	0.98 PF
Innkoblingstid	170 µs
Lystekniske data	
lyskilde	LED
Nominell lysstrøm	3650 lm
Fargegjengivelsesindeks	> 80 Ra
Fargetoleranse	2
Strålevinkel	68/66 °
fargetemperatur	4000 K
lys farge	840
UGR	19
levetid	50000 h, L80
lyseffekt	111 lm/w
temperaturer	
Omgivelsestemperatur (min)	0 °C
Omgivelsestemperatur (maks.)	+25 °C
Monteringstype	
Monteringstype	Takkonstruksjon, Veggkonstruksjon
Strømforsyning	
Antall strømforsyninger på LS B10A	13 Stk.
Antall strømforsyninger på LS B16A	21 Stk.
Antall strømforsyninger på LS C10A	21 Stk.
Antall strømforsyninger på LS C16A	35 Stk.
Elektrisk versjon	Dimbar, med intern driftsenhet



TEXT.LICHTVERTEILUNG

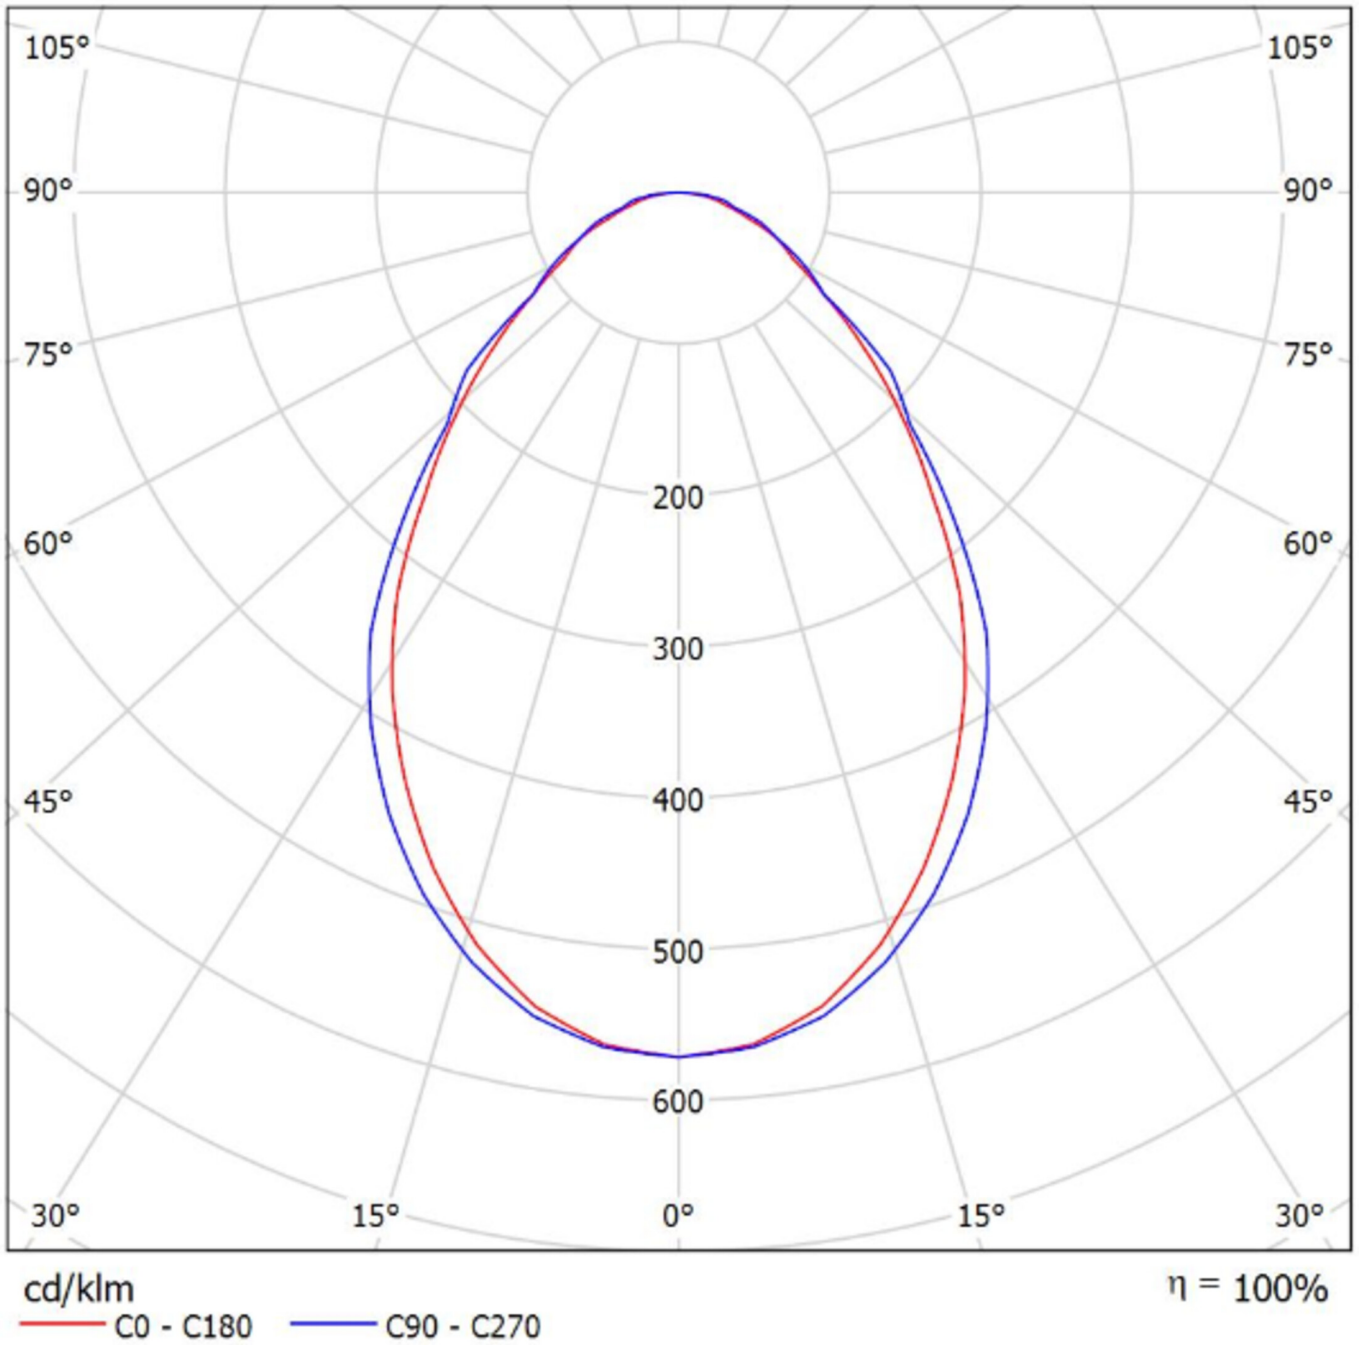

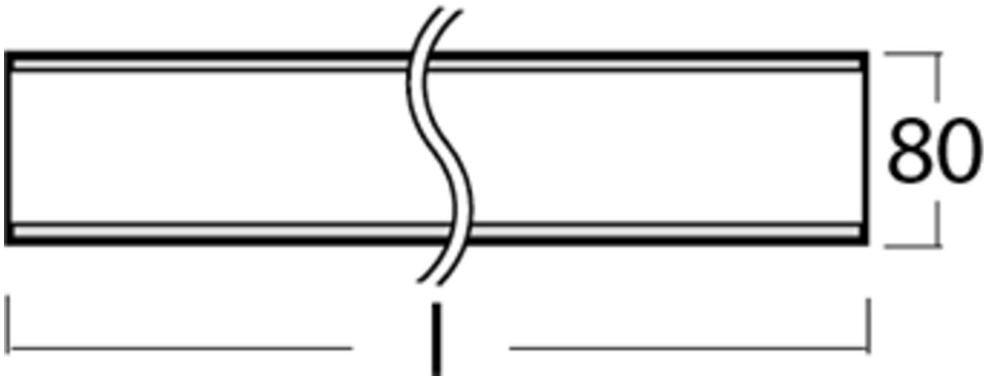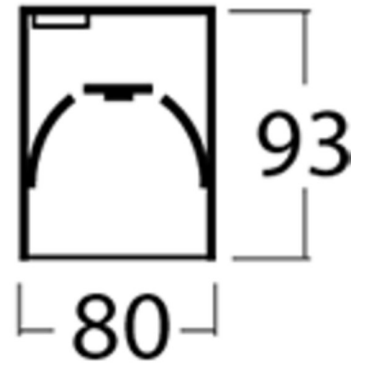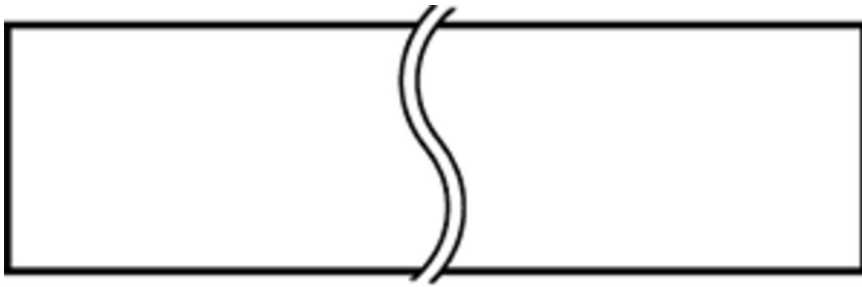

stand: 21.06.2024 - Det tas forbehold om tekniske endringer og feil.